




Agilent N5181A MXG and N5161A MXG ATE Analog Signal Generators

Data Sheet *Optimized for
performance and speed*

- Fast switching speeds
- Simplified self-maintenance
- High output power

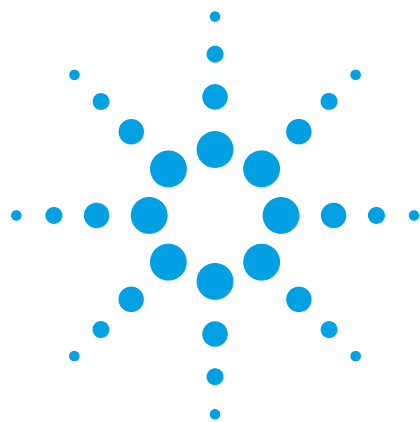

Agilent Technologies

Table of Contents

Definitions	3
Frequency	4
Amplitude	6
Spectral Purity	11
Analog Modulation	13
Frequency modulation	13
Phase modulation	13
Amplitude modulation	13
Internal analog modulation source	14
Narrow pulse modulation	14
Pulse modulation	15
External modulation inputs	15
Simultaneous modulation	15
General Characteristics	16
Ordering Information	18
Archive Section	20
Related Literature	21
Application literature	21
Product literature	21

Definitions

Specification (spec): Represents warranted performance of a calibrated instrument that has been stored for a minimum of 2 hours within the operating temperature range of 0 to 55 °C, unless otherwise stated, and after a 45 minute warm-up period. The specifications include measurement uncertainty. Data represented in this document are specifications unless otherwise noted.

Typical (typ): Represents characteristic performance, which 80% of the instruments manufactured will meet. This data is not warranted, does not include measurement uncertainty, and is valid only at room temperature (approximately 25 °C).

Nominal (nom): The expected mean or average performance, or an attribute whose performance is by design, such as the 50 Ω connector. This data is not warranted and is measured at room temperature (approximately 25 °C).

Measured (meas): An attribute measured during the design phase for purposes of communicating expected performance, such as amplitude drift vs. time. This data is not warranted and is measured at room temperature (approximately 25 °C).

Note: All graphs contain measured data from several units at room temperature unless otherwise noted.

Frequency

Range

Option 501	100 kHz to 1 GHz
Option 503	100 kHz to 3 GHz
Option 506	100 kHz to 6 GHz

Minimum frequency 100 kHz ¹

Resolution 0.01 Hz

Phase offset Adjustable in nominal 0.01° increments

Frequency bands ²

<i>Band</i>	<i>Frequency range</i>	<i>N</i>
1	100 kHz to < 250 MHz	1
2	250 to < 375 MHz	0.25
3	375 to < 750 MHz	0.5
4	750 to < 1500 MHz	1
5	1500 to < 3000.001 MHz	2
6	3000.001 to 6000 MHz	4

Switching speed ^{3, 4}

<i>Type</i>	<i>Standard</i>	<i>Option UNZ ⁵</i>	<i>Option UNZ ⁵ (typical)</i>
SCPI mode	≤ 5 ms (typ)	≤ 1.15 ms	≤ 950 μs
List/Step sweep mode	≤ 5 ms (typ)	≤ 900 μs	≤ 700 μs

1. Performance below 250 kHz is unspecified except as indicated, for units with serial numbers ending with 4742xxxx or greater. For units with lower serial numbers refer to the Archive Section at end of this document.
2. N is a factor used to help define certain specifications within the document.
3. Time from receipt of SCPI command or trigger signal to within 0.1 ppm of final frequency or within 100 Hz, whichever is greater, and amplitude settled to within 0.2 dB.
4. Additional time may be required for the amplitude to settle within 0.2 dB when switching to or from frequencies < 500 kHz.
5. Specifications apply when status register updates are off.


Accuracy	± aging rate ± temperature effects ± line voltage effects	
Internal time base reference		
oscillator aging rate	≤ 5 ppm/10 yrs, < ± 1 ppm/yr (nom) ¹	
Temperature effects	± 1 ppm (0 to 55 °C) (nom)	
Line voltage effects	± 0.1 ppm (nom); 5% to −10% (nom)	
Reference output		
Frequency	10 MHz	
Amplitude	≥ +4 dBm (nom) into 50 Ω load	
External reference input		
Input frequency	<i>Standard</i>	<i>Option 1ER</i>
	10 MHz	1 to 50 MHz (in multiples of 0.1 Hz)
Lock range	± 1 ppm	
Amplitude	> −3.5 to 20 dBm (nom)	
Impedance	50 Ω (nom)	
Waveform	Sine or square	
Digital sweep modes		
Operating modes	Step sweep (equally or logarithmically spaced frequency steps) List sweep (arbitrary list of frequency steps) Can also simultaneously sweep amplitude. See amplitude section for more detail.	
Sweep range	Within instrument frequency range	
Dwell time	100 μs to 100 s	
Number of points	2 to 65535 (step sweep) 1 to 3201 (list sweep)	
Step change	Linear or logarithmic	
Triggering	Free run, trigger key, external, timer, bus (GPIB, LAN, USB)	

1. Aging rate is determined by design as a function of the TCXO and is not specified.

Amplitude

Output power ¹
Minimum output power –110 dBm
with Option 1EQ ² –127 dBm

Range	Standard ³	Option 1EA
100 kHz to 250 kHz	+13 dBm	+15 dBm
> 250 kHz to 50 MHz	+13 dBm	+15 dBm
> 50 MHz to 3.0 GHz	+13 dBm	+23 dBm
> 3.0 GHz to 5.0 GHz	+13 dBm	+17 dBm
> 5.0 GHz	+11 dBm	+16 dBm

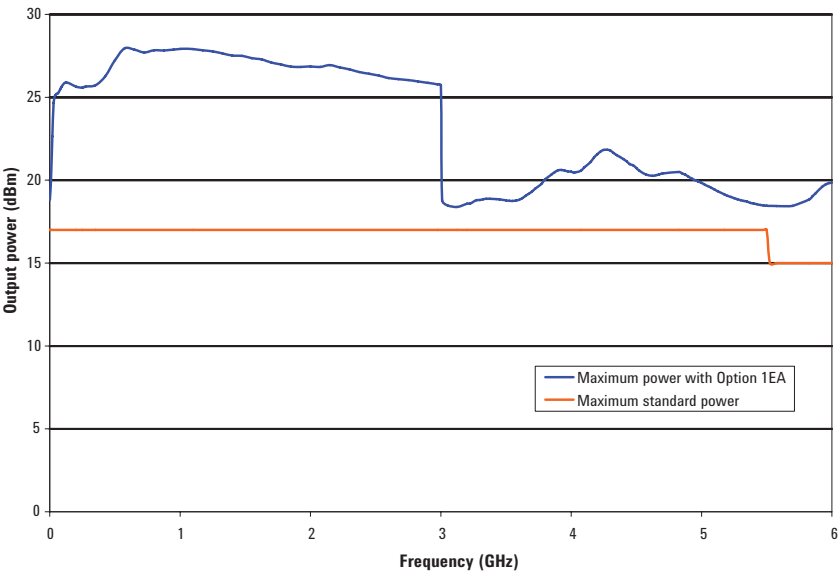

Resolution 0.01 dB (nom)

Step attenuator 0 to 130 dB in 5 dB steps, electronic type

Connector 50 Ω (nom)

SWR ⁴

≤ 1.7 GHz	1.4:1 (typ)
> 1.7 to 3 GHz	1.55:1 (typ)
> 3 to 4 GHz	1.7:1 (typ)
> 4 to 6 GHz	1.6:1 (typ)

Maximum reverse power

Max DC voltage	50 VDC (nom)
100 kHz to 6 GHz	2 W (nom)

1. Quoted specifications between 20 and 30 °C. Maximum output power typically decreases by 0.04 dB/ °C for temperatures outside this range.
2. Settable to –144 dBm with option 1EQ, but unspecified below –127 dBm.
3. Specifications apply to units with serial numbers ending with 4818xxxx or greater. For units with lower serial numbers refer to the Archive Section at end of this document.
4. SWR values apply to units with serial numbers ending with 4818xxxx or greater. For units with lower serial numbers refer to the Archive Section at end of this document.

Switching speed ^{1, 2}

<i>Type</i>	<i>Standard</i>	<i>Option UNZ</i>	<i>Option UNZ (typical)</i>
SCPI mode	≤ 5 ms (typ)	≤ 750 μs	≤ 650 μs
List/Step sweep mode	≤ 5 ms (typ)	≤ 500 μs	≤ 400 μs


Absolute level accuracy ³ [ALC on]

	<i>Standard</i>		<i>Option 1EQ</i>
	+23 ⁴ to –60 dBm	< –60 to –110 dBm	< –110 to –127 dBm
100 kHz to 250 kHz ⁵	±0.6 dB	±1.0 dB	—
> 250 kHz to 1 MHz	±0.6 dB	±0.7 dB	±1.7 dB
> 1 MHz to 1 GHz	±0.6 dB	±0.7 dB	±1.0 dB
> 1 to 3 GHz	±0.6 dB	±0.8 dB	±1.1 dB
> 3 to 4 GHz	±0.7 dB	±0.8 dB	±1.1 dB
> 4 to 6 GHz	±0.8 dB	±1.1 dB	±1.3 dB


1. Time from receipt of SCPI command or trigger signal to amplitude settled within 0.2 dB. For units with serial numbers ending in 4742xxxx or less, switching speed is specified for power levels < +5 dBm.
2. Switching speed specifications apply when status register updates are off.
3. Quoted specifications between 20 °C and 30 °C. For temperatures outside this range, absolute level accuracy degrades by 0.005 dB/°C for frequencies ≤ 4.5 GHz and 0.01 dB/°C for frequencies > 4.5 GHz. Output power may drift up to .003 dB per g/Kg change in specific humidity (nom).
4. Or maximum specified output power, whichever is lower.
5. Specification applies to units with serial numbers ending with 4818xxxx or greater. For units with lower serial numbers refer to the Archive Section at end of this document.

Absolute level accuracy [ALC off, relative to ALC on] ± 0.35 dB (typ)


Level accuracy at -110 dBm

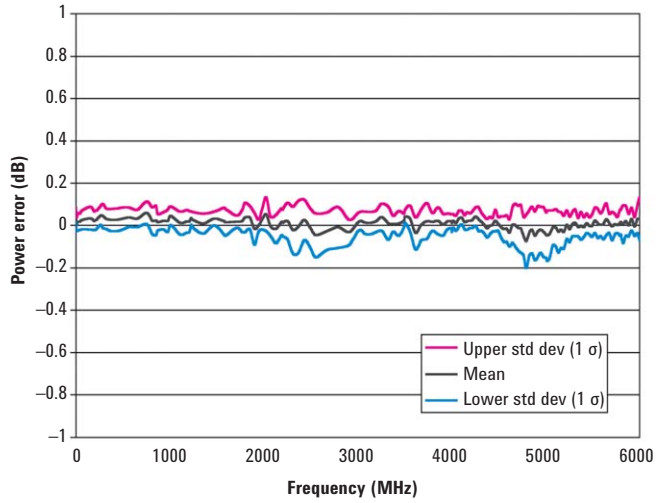


Level accuracy at -130 dBm

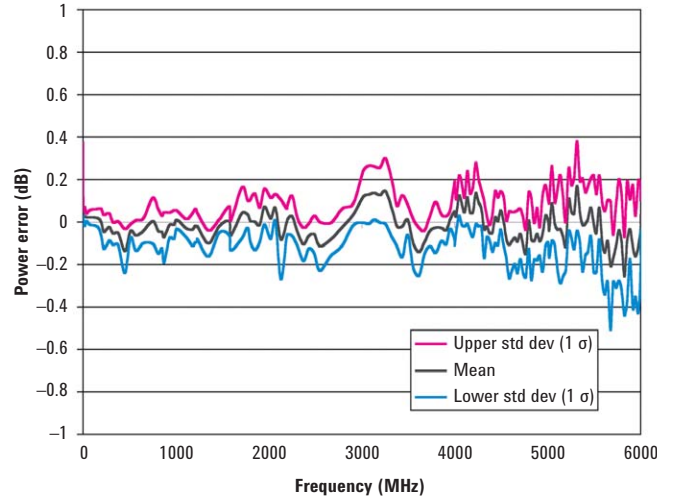


Level accuracy at -140 dBm




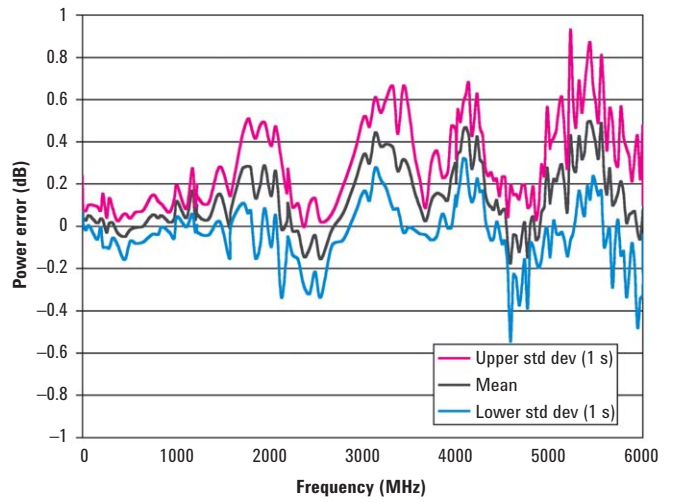


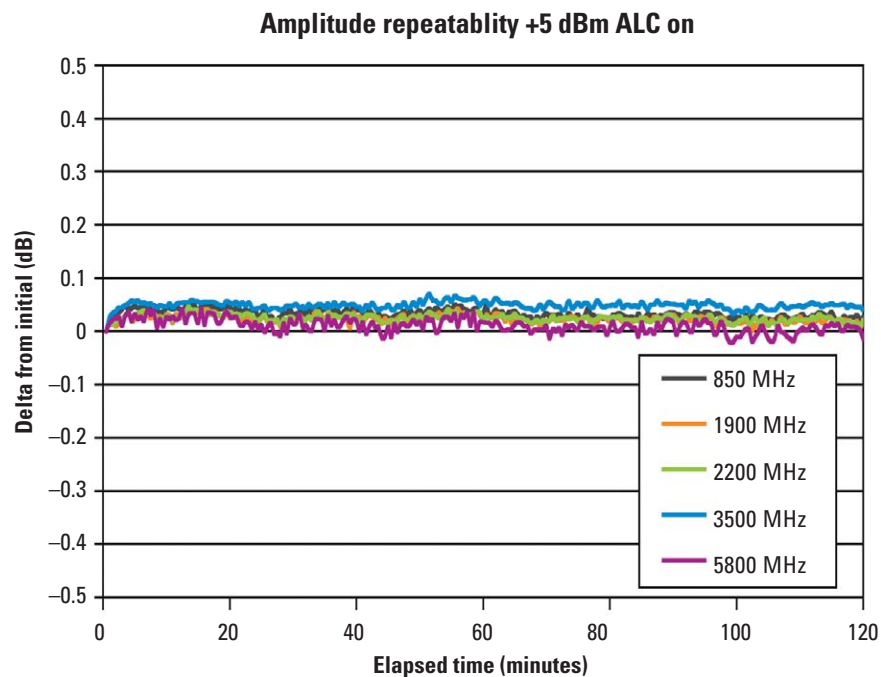


Repeatability measures the ability of the instrument to return to a given power setting after a random excursion to any other frequency and power setting. It should not be confused with absolute level accuracy.

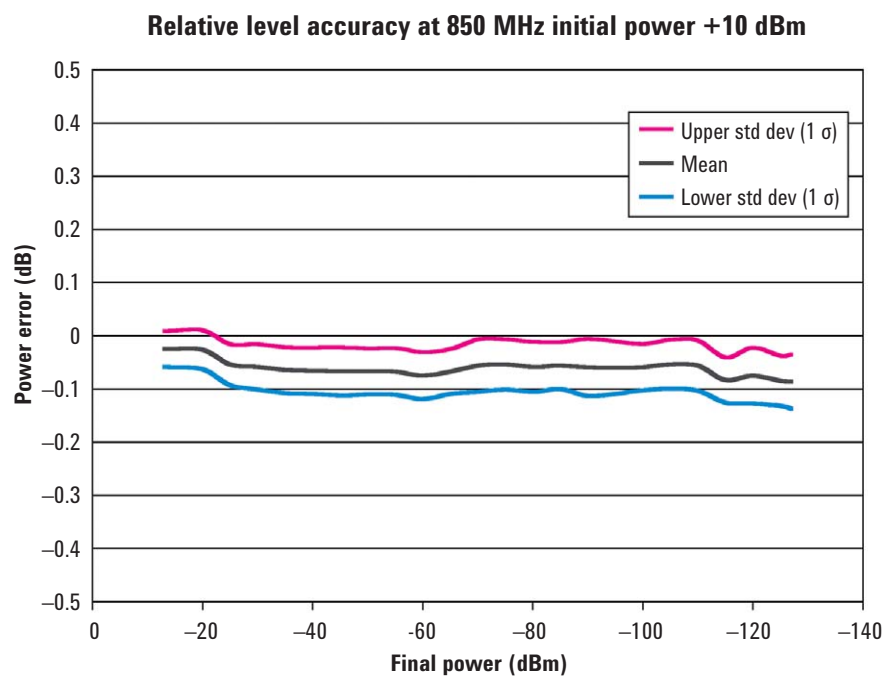

Relative level accuracy measures the accuracy of a step change from any power level to any other power level. This is useful for large changes (i.e. 5 dB steps).

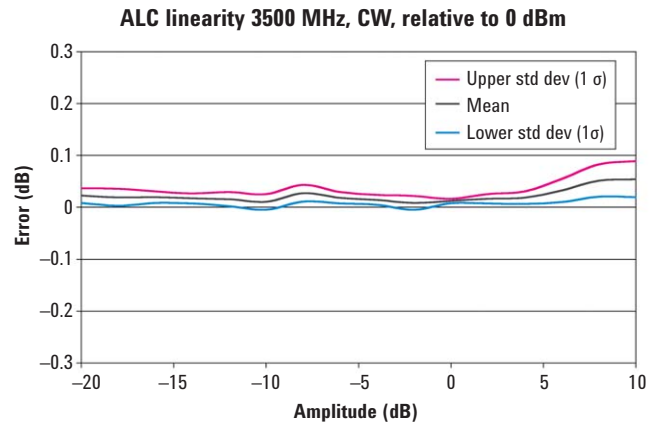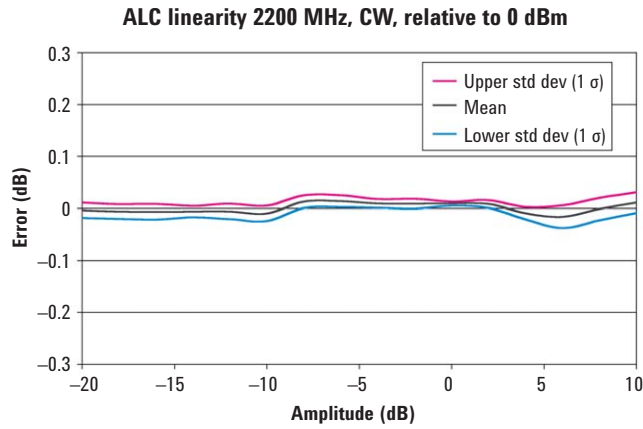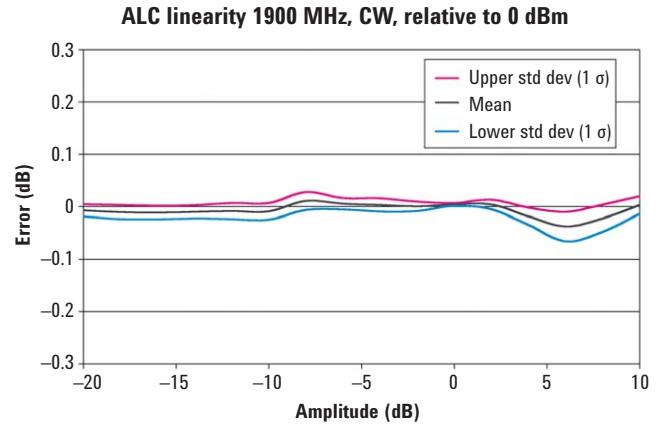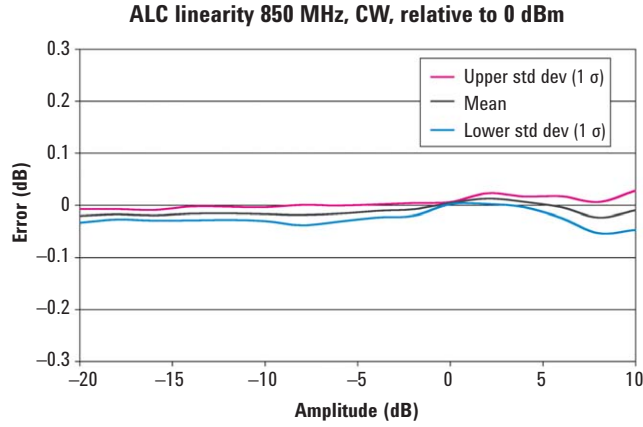

Linearity measures the accuracy of small changes while the attenuator is held in a steady state. This is useful for fine resolution changes.

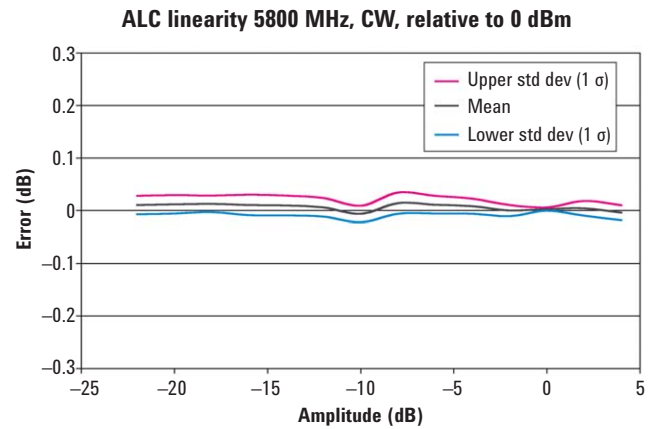

User flatness correction

Number of points	3201
Number of tables	Dependent on available free memory in instrument; 10000 maximum
Entry modes	USB/LAN direct power meter control, LAN to GPIB and USB to GPIB, remote bus and manual USB/GPIB power meter control



Digital sweep modes

Operating modes	Step sweep (evenly spaced amplitude steps) List sweep (arbitrary list of amplitude steps) Can also simultaneously sweep frequency. See frequency section for more detail.
Sweep range	Within instrument amplitude range
Dwell time	100 μ s to 100 s
Number of points	2 to 65535 (step sweep) 1 to 3201 (list sweep)
Step change	Linear
Triggering	Free run, trigger key, external, timer, bus (GPIB, LAN, USB)

Spectral Purity

Single sideband phase noise [at 20 kHz offset]

500 MHz	≤ -126 dBc/Hz (typ)	3 GHz	≤ -110 dBc/Hz (typ)
1 GHz	≤ -121 dBc/Hz (typ)	4 GHz	≤ -109 dBc/Hz (typ)
2 GHz	≤ -115 dBc/Hz (typ)	6 GHz	≤ -104 dBc/Hz (typ)

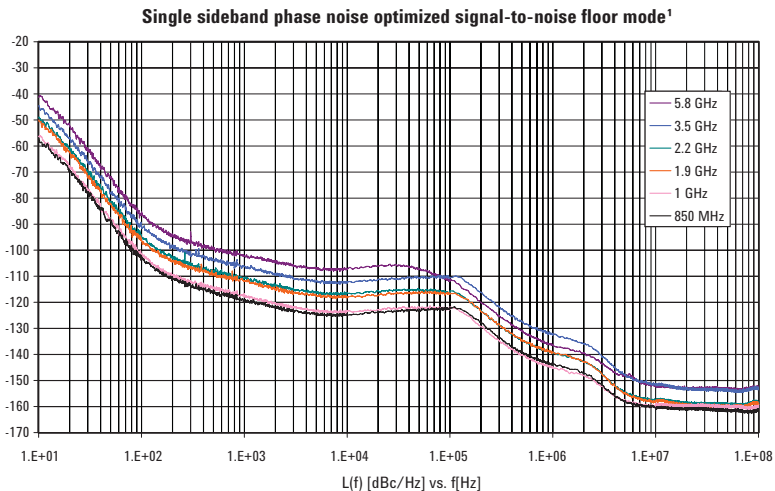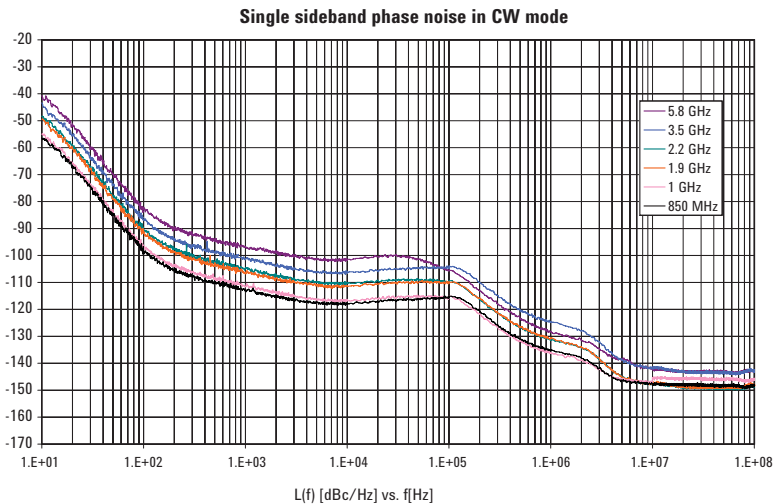

1. Signal-to-noise optimized mode will improve broadband noise floor. In this mode, other specifications may not apply. Applies to instrument serial number prefix 4818xxxx or above.

Residual FM [CW mode, 300 Hz to 3 kHz BW, CCITT, μs] < N x 2 Hz (typ)

Harmonics ¹ [CW mode, output level]

<i>Range</i>	<i>(< +4 dBm)</i>	<i>1EA (< +12 dBm)</i>
250 kHz to 3 GHz	< -35 dBc	< -30 dBc
> 3 to 4 GHz	< -41 dBc (typ)	< -30 dBc (typ)
> 4 to 6 GHz	< -53 dBc (typ)	< -40 dBc (typ)

Nonharmonics ¹ [CW mode]

	<i>>10 kHz offset</i>
250 kHz to 250 MHz	< -62 dBc, < -70 dBc (typ)
> 250 to 375 MHz	< -68 dBc, < -81 dBc (typ)
> 375 to 750 MHz	< -57 dBc, < -73 dBc (typ)
> 750 MHz to 3 GHz	< -54 dBc, < -62 dBc (typ)
> 3 to 6 GHz	< -47 dBc, < -56 dBc (typ)

Subharmonics ¹ [CW mode]

250 kHz to 3.0 GHz	< -73 dBc
> 3.0 to 4.5 GHz	< -68 dBc
> 4.5 to 5.5 GHz	< -56 dBc
> 5.5 to 6 GHz	< -52 dBc

Jitter ²

Carrier	SONET/SDH			
<i>Frequency</i>	<i>Data rate</i>	<i>rms jitter BW</i>	<i>$\mu\text{UI rms}$</i>	<i>Femtoseconds</i>
155 MHz	155 MB/s	100 Hz to 1.5 MHz	84	537
622 MHz	622 MB/s	1 kHz to 5 MHz	47	75
2.488 GHz	2488 MB/s	5 kHz to 20 MHz	178	72

1. Harmonics, subharmonics, and non-harmonics apply to instruments with serial numbers greater than 4818xxx and are typical outside the frequency range of the instrument. Refer to the Archive Section at end of this document for specifications for units with lower serial numbers.
2. Calculated from phase noise performance in CW mode at +10 dBm. For other frequencies, data rates, or bandwidths, please consult your sales representative.

Analog Modulation

Frequency modulation ¹

(Option UNT)

Max deviation	N x 10 MHz (nom)	
Resolution	0.1% of deviation or 1 Hz, which ever is greater (nom)	
Deviation accuracy		
[1 kHz rate, deviation is N x 50 kHz]	< ±2% + 20 Hz	
Modulation frequency response [at 100 kHz deviation]		
	<i>1 dB bandwidth</i>	<i>3 dB bandwidth</i>
DC coupled	DC to 3 MHz (nom)	DC to 7 MHz (nom)
AC coupled	5 Hz to 3 MHz (nom)	5 Hz to 7 MHz (nom)
Carrier frequency accuracy relative to CW in DCFM	< ±0.2% of set deviation	
	+ (N x 1 Hz) ²	
	< ±0.06% of set deviation	
	+ (N x 1 Hz) (typ) ³	
Distortion [1 kHz rate, deviation is N x 50 kHz]	< 0.4%	
Sensitivity when using external input	+1V peak for indicated deviation (nom)	

Phase modulation ¹

(Option UNT)

Modulation deviation and frequency response:

	<i>Max dev</i>	<i>3 dB bandwidth</i>
Normal BW	N x 5 radians (nom)	DC to 1 MHz (nom)
High BW mode	N x 10 radians (nom)	DC to 4 MHz (nom)
Resolution	0.1% of deviation (nom)	
Deviation accuracy [1 kHz rate, normal BW mode]	< +0.5% + 0.01 rad (typ)	
Distortion [1 kHz rate, deviation normal BW mode]	< 0.2% (typ)	
Sensitivity when using external input	+1V peak for indicated deviation (nom)	

Amplitude modulation ⁴

(Option UNT)

AM depth type	Linear or exponential
Depth	
Maximum	100%
Resolution	0.1% of depth (nom)
Depth accuracy [1 kHz rate]	< ±4% of setting +1% (typ)
Modulation rate [3 dB BW]	
DC coupled	0 to 10 kHz (typ)
AC coupled	5 Hz to 10 kHz (typ)
Distortion [1 kHz rate]	< 2% (typ)
Sensitivity when using external input	+1V peak for indicated depth (nom)

1. N is a factor used to define certain specifications in the document. Refer to page 4 for N values.
2. Specification valid for temperature changes of less than ± 5 °C since last DCFM calibration.
3. Typical performance immediately after a DCFM calibration.
4. AM is specified at carrier frequencies from 500 kHz to 3 GHz, power levels ≤ ±4 dBm, and with ALC on and envelope peaks within ALC operating range (–20 dBm to maximum specified power, excluding step-attenuator setting).

Internal analog modulation source

(Single sine wave generator for use with AM, FM, phase modulation. Requires Option UNT)

Waveform	Sine
Rate range	0.1 Hz to 2 MHz (tuneable to 3 MHz)
Resolution	0.1 Hz
Frequency accuracy	Same as RF reference source (nom)

Pulse modulation

(Option UNU) ¹

On/Off ratio	> 80 dB (typ)
Rise time	< 50 ns (typ)
Fall time	< 50 ns (typ)

Minimum width

ALC on	≥ 2 μs
ALC off	≥ 500 ns
Resolution	20 ns (nom)

Pulse repetition frequency

ALC on	DC to 500 kHz
ALC off	DC to 2 MHz

Level accuracy (relative to CW, ALC on or off)	< 1 dB (typ)
---	--------------

Video feedthrough	< 350 mV (typ) ²
-------------------	-----------------------------

Pulse overshoot	< 15% (typ)
-----------------	-------------

Pulse compression	5 ns (typ)
-------------------	------------

Pulse delay

RF delay (video to RF output)	10 ns (nom)
Video delay (ext input to video)	30 ns (nom)

External input

Input impedance	50 ohm (nom)
Level	+1 V _{peak} = ON (nom)

Internal pulse generator

Modes	Free-run, square, triggered, adjustable doublet, trigger doublet, gated, and external pulse
Square wave rate	0.1 Hz to 10 MHz, 0.1 Hz resolution (nom)
Pulse period	500 ns to 42 seconds (nom)
Pulse width	500 ns to pulse period – 10 ns (nom)
Resolution	10 ns (nom)
Adjustable trigger delay:	–pulse period + 10 ns to pulse period to pulse width –10 ns

Settable delay

Free run	–3.99 to 3.97 μs
Triggered	0 to 40 s

Resolution

[delay, width, period]	10 ns (nom)
------------------------	-------------

Pulse doublets

1st pulse delay (relative to sync out)	0 to 42 s – pulse width – 10 ns
1st pulse width	500 ns to 42 s – delay – 10 ns
2nd pulse delay (relative to pulse 1)	0 to 42 s – (delay1 + width2) – 10 ns
2nd pulse width	20 ns to 42 s – (delay1 + delay2) – 10 ns


1. Pulse specifications apply to frequencies > 500 MHz. Operable down to 10 MHz.
2. Specification applies for power levels < 10 dBm.

Narrow pulse modulation

(Option UNW) ¹

	500 MHz to 3.0 GHz	Above 3.0 GHz
On/Off ratio	> 80 dB (typ)	> 80 dB (typ)
Rise/Fall times (Tr, Tf)	< 10 ns; 7 ns (typ)	< 10 ns; 7 ns (typ)
Minimum pulse width		
Internally leveled	≥ 2 μs	≥ 2 μs
ALC off ²	≥ 20 ns	≥ 20 ns
Repetition frequency		
Internally leveled	10 Hz to 500 kHz	10 Hz to 500 kHz
ALC off ²	dc to 5 MHz	dc to 10 MHz
Level accuracy (relative to CW)		
Internally leveled	< ±1.0 dB	< ±1.0 dB
ALC off ²	< ±1.0 dB (typ)	< ±1.0 dB (typ)
Width compression	< 5 ns (typ)	< 5 ns (typ)
(RF width relative to video out)		
Video feed-through ³	< 50 mv (typ)	< 5 mv (typ)
Video delay (ext input to video)	20 ns (nom)	20 ns (nom)
RF delay (video to RF output)	10 ns (nom)	10 ns (nom)
Pulse overshoot	< 15% (typ)	< 15% (typ)
Input level	+1 Vpeak = RF On	+1 Vpeak = RF On
Input impedance	50 Ω (nom)	50 Ω (nom)

Td Video delay (variable)
Tw Video pulse width (variable)
Tp Pulse period (variable)
Tm RF delay
Trf RF pulse width
Tf RF pulse fall time
Tr RF pulse rise time
Vor Pulse overshoot
Vf Video feedthrough

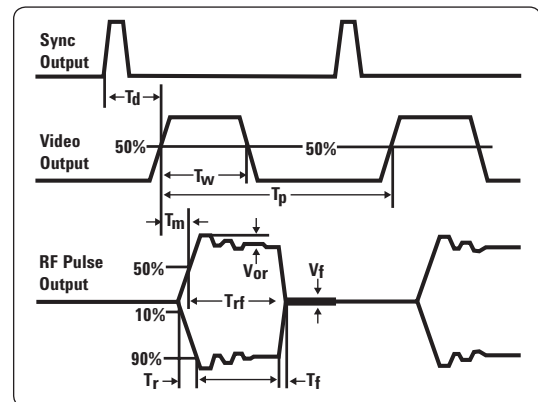

External modulation inputs

(Requires Option UNT)

Modulation types	FM, AM, phase mod, pulse mod
Input impedance	50 Ω (nom)

Simultaneous modulation ⁴

All modulation types (FM, AM, Φ M and pulse modulation) may be simultaneously enabled except: FM and phase modulation can not be combined; two modulation types can not be simultaneously generated using the same modulation source. For example, AM and FM can run concurrently and will modulate the output RF. This is useful for simulating signal impairments.

1. Pulse specifications apply to frequencies > 500 MHz. Operable down to 10 MHz.
2. With power search on.
3. Video feed through applies to power levels < +10 dBm.
4. If AM or pulse modulation are on then phase and FM specifications do not apply.

General Characteristics

Remote programming

Interfaces	GPIB	IEEE-488.2, 1987 with listen and talk
	LAN	100BaseT LAN interface, LXI class C compliant
Control languages	USB	Version 2.0
	SCPI	Version 1997.0

Compatibility languages supporting 100% of commonly used commands ¹

Agilent Technologies	E4438C, E4428C, E442xB, E443xB, E8241A, E8244A, E8251A, E8254A, E8247C, E8257C/D, E8267C/D, 8648 series, 8656B, E8663B, 8657A/B
Aeroflex Incorporated	3410 series
Rohde & Schwarz	SMU200A, SMJ100A, SMATE200A, SMIQ, SML, SMV
Power requirements	100 to 120 VAC, 50 to 60 Hz, 400 Hz 220 to 240 VAC, 50 to 60 Hz, 400 Hz 250 W maximum
Operating temperature range	0 to 55 °C
Storage temperature range	–40 to 70 °C
Operating and storage altitude	up to 15,000 feet
Environmental stress	Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions. Test Methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.
Safety/EMC	Complies with applicable Safety and EMC regulations and directives.
Memory	Memory is shared by instrument states, sweep list files, and other files. There are 4 GB of flash memory available in the N5181A MXG. Depending on how the memory is utilized, a maximum of 1000 instrument states can be saved.
Security (Option 006)	Memory sanitizing, memory sanitizing on power on, and display blanking
Self test	Internal diagnostic routines test most modules in a preset condition. For each module, if its node voltages are within acceptable limits, the module “passes” the test.
Weight	≤ 12.5 kg (27.5 lb.) net, ≤ 27.2 kg (60 lb.) shipping
Dimensions	103 mm H x 426 mm W x 432 mm L [3.5 in H x 16.8 in W x 17 in L]
Recommended calibration cycle	24 months
ISO compliant	The Agilent N5181A MXG is manufactured in an ISO-9001 registered facility in concurrence with Agilent Technologies’ commitment to quality.

1. Firmware version A.01.10 and later.

Front panel connectors ¹

RF output ²
USB 2.0

Outputs the RF signal via a precision N type female connector. Used with a memory stick for transferring instrument states, licenses and other files into or out of the instrument. Also used with U2000 Series USB average power sensors. For a current list of supported memory sticks, visit www.agilent.com/find/MXG, click on Technical Support, and refer to FAQs: Waveform Downloads and Storage.

Rear panel connectors ¹

RF output
(Option 1EM or N5161A)
Sweep out

Outputs the RF signal via a precision N type female connector. Generates output voltage, 0 to +10 V when the signal generator is sweeping. This output can also be programmed to indicate when the source is settled or output pulse video and is TTL and CMOS compatible in this mode. Output impedance < 1 Ω , can drive 2 k Ω . Damage levels are ± 15 V.

AM

External AM input. Nominal input impedance is 50 Ω . Damage levels are ± 5 V.

FM

External FM input. Nominal input impedance is 50 Ω . Damage levels are ± 5 V.

Pulse

External pulse modulation input. This input is TTL and CMOS compatible. Low logic levels are 0 V and high logic levels are +1 V. Nominal input impedance is 50 Ω . Input damage levels are ≤ -0.3 V and $\geq +5.3$ V.

Trigger in

Accepts TTL and CMOS level signals for triggering point-to-point in sweep mode. Damage levels are ≤ -0.3 V and $\geq +5.3$ V.

Trigger out

Outputs a TTL and CMOS compatible level signal for use with sweep mode. The signal is high at start of dwell, or when waiting for point trigger in manual sweep mode; low when dwell is over or point trigger is received. This output can also be programmed to indicate when the source is settled, pulse synchronization, or pulse video. Nominal output impedance 50 ohms. Input damage levels are ≤ -0.3 V and $\geq +5.3$ V.

Reference input

Accepts a 10 MHz reference signal used to frequency lock the internal timebase. Option 1ER adds the capability to lock to a frequency from 1 MHz to 50 MHz. Nominal input level -3.5 to +20 dBm, impedance 50 Ω , sine or square waveform.

10 MHz out

Outputs the 10 MHz reference signal used by internal timebase. Level nominally +3.9 dBm. Nominal output impedance 50 Ω . Input damage level is +16 dBm.

USB 2.0

The USB connector provides remote programming functions via SCPI.

1. All connectors are BNC unless otherwise noted.

2. All N5161A MXG ATE connectors located on rear panel.

LAN (100 BaseT)	The LAN connector provides the same SCPI remote programming functionality as the GPIB connector. The LAN connector is also used to access the internal web server and FTP server. The LAN supports DHCP, sockets SCPI, VXI-11 SCPI, connection monitoring, dynamic hostname services, TCP keep alive. This interface is LXI class C and B compliant. Trigger response time for the immediate LAN trigger is 0.5 ms (minimum), 4 ms (maximum), 2 ms typical; delayed/alarm trigger is unknown. Trigger output response time is 0.5 ms (minimum), 4 ms (maximum), 2 ms typical.
GPIB	The GPIB connector provides remote programming functionality via SCPI.

Ordering Information


Frequency	501	Frequency range from 100 kHz to 1 GHz
	503	Frequency range from 100 kHz to 3 GHz
	506	Frequency range from 100 kHz to 6 GHz
Performance enhancements	UNZ	Fast switching
	1EA	High output power
	1EQ	Low power (< –110 dBm)
	UNU	Pulse modulation
	UNW	Narrow pulse modulation
	UNT	AM, FM, phase modulation
	006	Instrument security
	1ER	Flexible reference input (1 to 50 MHz)
	1EM	Move RF output to rear panel ¹
	UK6	Commercial calibration certificate with test data
Accessories	099	Expanded license key upgradeability ²
	1CM	Rackmount kit
	1CN	Front handle kit
	1CP	Rackmount and front handle kit
	1CR	Rack slide kit
	AXT	Transit case
	800	Customer service kit front panel connector configuration
	801	Customer service kit rear panel connector configuration

1. Not available on N5161A MXG ATE.

2. For more information on upgrades and Option 099 refer to *Agilent MXG Signal Generator Configuration Guide*, literature number 5989-5485EN.

Archive Section


Frequency	Minimum frequency 100 kHz ¹		
Output power (for serial number prefix 4742xxxx)	Range ²	Standard	Option 1EQ ³
	100 kHz to 250 kHz	-110 to +4 dBm	-127 to +4 dBm
	> 250 kHz to 2.5 GHz	-110 to +13 dBm	-127 to +13 dBm
	> 2.5 to 3.0 GHz	-110 to +10 dBm	-127 to +10 dBm
	> 3.0 to 4.5 GHz	-110 to +13 dBm	-127 to +13 dBm
	> 4.5 to 5.8 GHz	-110 to +10 dBm	-127 to +10 dBm
	> 5.8 to 6 GHz	-110 to +7 dBm	-127 to +7 dBm

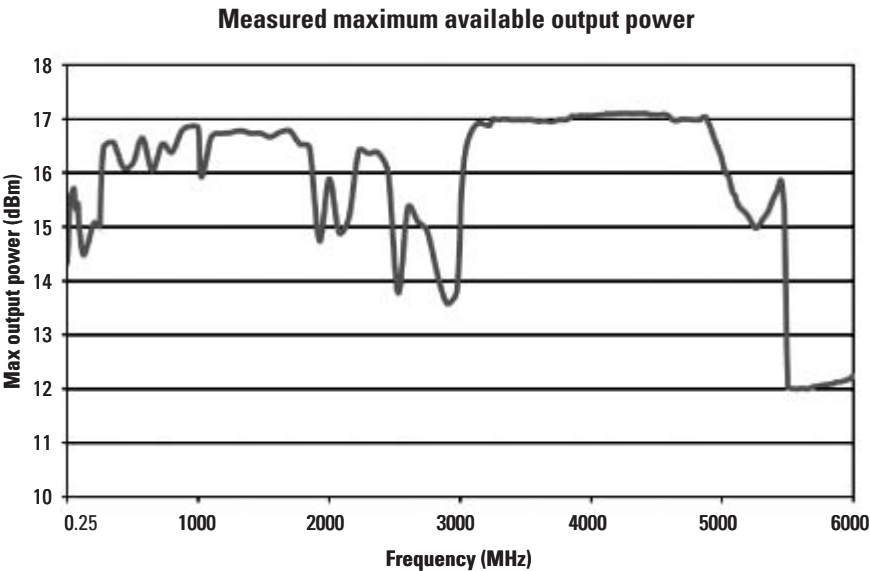

Output power (for serial number prefixes lower than 4742xxxx)	Range ²	Standard	Option 1EQ ³
	250 kHz to 2.5 GHz	-110 to +13 dBm	-127 to +13 dBm
	> 2.5 to 3.0 GHz	-110 to +10 dBm	-127 to +10 dBm
	> 3.0 to 4.5 GHz	-110 to +13 dBm	-127 to +13 dBm
	> 4.5 to 5.8 GHz	-110 to +10 dBm	-127 to +10 dBm
	> 5.8 to 6 GHz	-110 to +7 dBm	-127 to +7 dBm

1. Performance below 250 kHz is unspecified for units with serial numbers lower than 4742xxxx.
2. Quoted specifications between 20 and 30 °C. Maximum output power typically decreases by 0.2 dB/°C for temperatures outside of this range.
3. Settable to -144 dBm with Option 1EQ, but unspecified below -127 dBm.

Maximum available output power

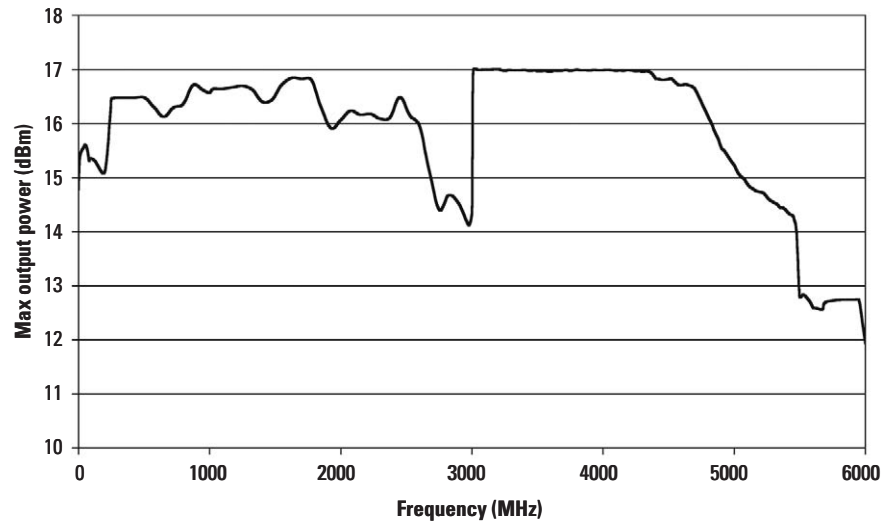

SWR (for serial number prefix 4742xxxx)	≤ 2.1 GHz	1.4:1 (typ)
	> 2.1 GHz to 4 GHz	1.5:1 (typ)
	> 4.0 GHz 5.6 GHz	1.7:1 (typ)
	> 5.6 GHz to 6 GHz	2.0:1 (typ)

Maximum reverse power	Max DC voltage	50 VDC (nom)
	250 kHz to 6 GHz	2 W (nom)

SWR (for serial number prefixes lower than 4742xxxx)	≤ 1.4 GHz	1.7:1 (typ)
	> 1.4 GHz to 4 GHz	2.3:1 (typ)
	> 4.0 GHz 5.0 GHz	2.4:1 (typ)
	> 5.0 GHz to 6 GHz	2.2:1 (typ)

Maximum reverse power	Max DC voltage	50 VDC (nom)
	50 kHz to 6 GHz	2 W (nom)

Absolute level accuracy in CW mode ¹ [ALC on] (for serial number prefix 4742xxxx)

	Standard		Option 1EQ
	+7 ² to -60 dBm	< -60 to -110 dBm	< -110 to -127 dBm
100 kHz to 250 kHz	±0.6 dB	±1.0 dB	---
> 250 kHz to 1 MHz	±0.6 dB	±0.7 dB	±1.7 dB
> 1 MHz to 1 GHz	±0.6 dB	±0.7 dB	±1.0 dB
> 1 GHz to 3 GHz	±0.7 dB	±0.9 dB	±1.4 dB
> 3 GHz to 4 GHz	±0.8 dB	±0.9 dB	±1.0 dB
> 4 GHz to 6 GHz	±0.8 dB	±1.1 dB	±1.3 dB

Absolute level accuracy in CW mode ¹ [ALC on] (for serial number prefixes lower than 4742xxxx)

	Standard		Option 1EQ
	+7 to -60 dBm	< -60 to -110 dBm	< -110 to -127 dBm
250 kHz to 1 MHz	±0.6 dB	±0.7 dB	±1.7 dB
> 1 MHz to 1 GHz	±0.6 dB	±0.7 dB	±1.0 dB
> 1 GHz to 3 GHz	±0.7 dB	±0.9 dB	±1.4 dB
> 3 GHz to 4 GHz	±0.8 dB	±0.9 dB	±1.0 dB
> 4 GHz to 6 GHz	±0.8 dB	±1.1 dB	±1.3 dB

- Quoted specifications between 20 and 30 °C. For temperatures outside of this range, absolute level accuracy degrades by 0.01 dB/ °C for frequencies ≤ 4.5 GHz and 0.02 dB/ °C for frequencies > 4.5 GHz.
- Level accuracy specified to +7 dBm or maximum specified output power, whichever is lower.

Spectral Purity

(for serial numbers lower than 4818xxxx)

Harmonics ¹ [CW mode, output level < 4 dBm]

250 kHz to 3 GHz	< -30 dBc
> 3 GHz to 6 GHz	< -44 dBc (typ)

Nonharmonics ¹ [CW mode], > 10 kHz offset

250 kHz to 250 MHz	< -54 dBc, < 70 dBc (typ)
> 250 MHz to 375 MHz	< -61 dBc, < -81 dBc (typ)
> 375 MHz to 750 MHz	< -55 dBc, < -73 dBc (typ)
> 750 MHz to 1.5 GHz	< -48 dBc, < -62 dBc (typ)
> 1.5 GHz to 3 GHz	< -48 dBc, < -62 dBc (typ)
> 3 GHz to 6 GHz	< -42 dBc, < -56 dBc (typ)

Subharmonics ¹ [CW mode]

≤ 4 GHz	< -76 dBc
> 4 GHz to 5 GHz	< -64 dBc
> 5 GHz to 5.5 GHz	< -50 dBc
> 5.5 GHz to 6 GHz	< -46 dBc

1. Harmonics, sub-harmonics, and non-harmonics outside the frequency range of the instrument are typical.

See the Agilent MXG Web page for the latest information

Get the latest news, product and support information, application literature, firmware upgrades and more.

www.agilent.com/find/MXG



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.



www.lxistandard.org

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

Related Literature

Application literature

- **RF Source Basics, a self-paced tutorial** (CD-ROM), literature number 5980-2060E.
- **Accurate amplifier ACLR and ACPR testing with the Agilent MXG Vector Signal Generator**, literature number 5989-5471EN
- **Improving Throughput with Fast RF Signal Generator Switching**, literature number 5989-5487EN
- **Digital Modulation in Communications Systems-An Introduction**, Application Note 1298, literature number 5965-7160E.
- **Testing CDMA Base Station Amplifiers**, Application Note 1307, literature number 5967-5486E.

Product literature

- **Agilent MXG Signal Generator**, Brochure, literature number 5989-5074EN
- **Agilent MXG Signal Generator**, Configuration Guide, literature number 5989-5485EN
- **Agilent N5181A analog signal generator**, Data Sheet, literature number 5989-5311EN
- **E4438C ESG Vector Signal Generator**, Brochure, literature number 5988-3935EN.
- **E4438C ESG Vector Signal Generator**, Configuration Guide, literature number 5988-4085EN.
- **E4438C ESG Vector Signal Generator**, Data Sheet, literature number 5988-4039EN

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

www.agilent.com/find/removealldoubt

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	01 36027 71571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
*0.125 €/minute	
Germany	07031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201
Other European Countries:	
www.agilent.com/find/contactus	

Revised: October 1, 2008

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006-2009
Printed in USA, May 8, 2009
5989-5311EN

1. Not available on N5161A MXG ATE.
2. For more information on upgrades and Option 099 refer to *Agilent MXG Signal Generator Configuration Guide*, literature number 5989-5485EN.



Agilent Technologies