

STANDARD INTERCHANGEABLE DRIVE PRESET TORQUE WRENCHES

belknaptools.com/preset-torque-wrenches/standard-interchangeable-drive-preset-torque-wrenches/

Belknap's Preset Standard Interchangeable Drive Preset Torque Wrenches are the industry standard and the basis for which all other preset torque wrenches are designed. They are made specifically to be used in conjunction with our [Standard Interchangeable Drive Ends](#). Learn more about our Standard Interchangeable Drive [Preset Torque Wrenches](#).


KEY FEATURES

- Torques in both left and right-hand directions; others only operate in one direction.
- Loud audible and positive sensory click when calibrated torque is achieved.
- Accuracy = $\pm 4\%$ in direction of calibration, from 20-100% of full scale.
- High steel alloy construction.
- Most models include comfortable rubber grip, except for the VB600T-I and VB1000T-I, which includes extension handles.
- Scientifically heat treated.
- Torque values can be calibrated in English or Metric settings.
- Tamper-proof preset torque.
- Calibration can be quickly adjusted in the calibration lab.
- Meets or exceeds ASME B107.300 – 2010.

OPERATING PROCEDURES: View as [PDF](#)



If you are in need of a specially designed torque wrench, give us a call at (248) 348-7800 to discuss your specific requirements. In addition, our [Specialty Tools Gallery](#) displays a small sampling of what we've produced for our customers over the years.

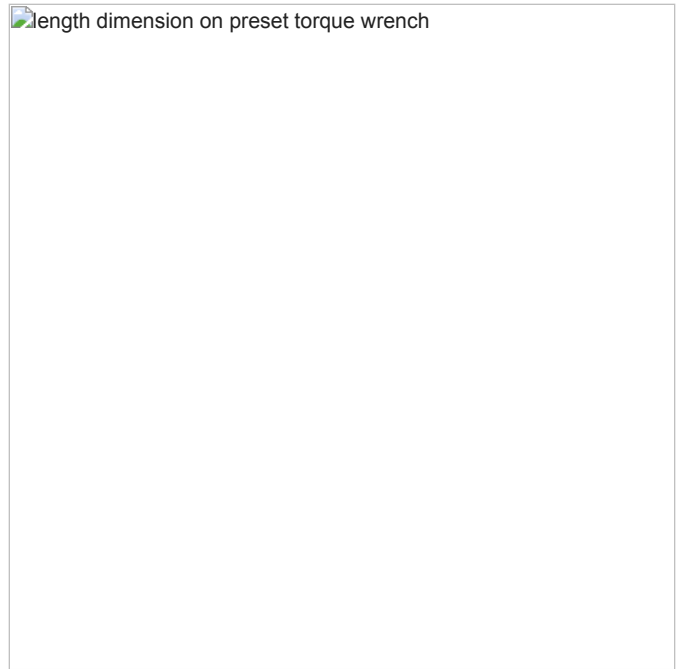

	Tq Low	Tq High	Tq Low	Tq High	Tq Low	Tq High	Min Torque	Max Torque	Min Torque	Max Torque	Min Torque	Max Torque		L
Part #	(kg·m)	(kg·m)	(g·cm)	(g·cm)	(In·Oz)	(In·Oz)	(In. Lb.)	(In. Lb.)	(Ft. Lb.)	(Ft. Lb.)	(Nm.)	(Nm.)	Shank Size	(In.)
VB2T-I	0.12	0.28	11521.6	27651.84	160	384	10	24	0.83	2	1.13	2.71	J	4
VB5T-I	0.17	0.69	17282.4	69129.6	240	960	10	50	1.25	5.00	1.69	6.78	J	6
VB10T-I	0.41	1.24	41477.76	124433.28	576	1728	36	108	3	9	4.07	12.20	J	6
VB10ST-I	0.97	3.46	96781.44	345648	1344	4800	84	300	7	25	9.49	33.90	J	6
VB10AT-I	0.97	3.46	96781.44	345648	1344	4800	84	300	7	25	9.49	33.90	J	7
VB50ST-I	1.38	6.91	138259.2	691296	1920	9600	120	600	10	50	13.56	67.79	J	9
VB50T-I	1.38	6.91	138259.2	691296	1920	9600	120	600	10	50	13.56	67.79	J	1'
VB100ST-I	6.22	20.74	622166.4	2073888	8640	28800	540	1800	45	150	61.01	203.37	Y	1'
VB100T-I	6.22	20.74	622166.4	2073888	8640	28800	540	1800	45	150	61.01	203.37	Y	1'
VB200T-I	6.22	27.65	622166.4	2765184	8640	38400	540	2400	45	200	61.01	271.17	Y	2'
VB300T-I	13.83	41.48	1382592	4147776	19200	57600	1200	3600	100	300	135.58	406.75	X	2'
VB600T-I	27.65	82.95	2765184	8295552	38400	115200	2400	7200	200	600	271.17	813.50	Z	5'
VB1000T-I	41.48	138.26	4147776	13825920	57600	192000	3600	12000	300	1000	406.75	1355.83	Z	6'

Standard Interchangeable Drive Preset Torque Wrenches