

Coaxial Frequency Mixer

Level 7 (LO Power +7 dBm) 0.2 to 500 MHz

ZP-10514+
ZP-10514



BNC version shown
CASE STYLE: GG60

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Coaxial Connections

LO	L
RF	R
IF	X

Features

- low conversion loss, 5.18 dB typ.
- high L-R isolation, 50 dB typ.
- rugged shielded case

Applications


- VHF/UHF
- instrumentation

Connectors	Model	Price	Qty.
BNC	ZP-10514+	\$62.95 ea.	(1-9)
SMB	ZP-10514-SMB(+)	\$62.95 ea.	(1-9)
SMA	ZP-10514-S(+)	\$77.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Outline Drawing

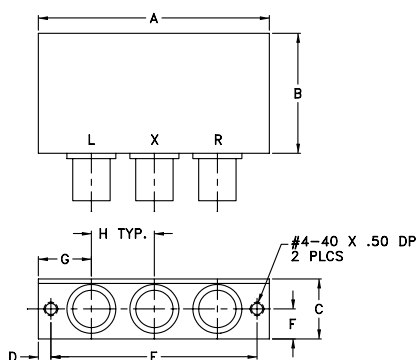

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	wt
2.31	1.20	.60	.125	2.062	.30	.53	.63	grams
58.7	30.5	15.2	3.2	52.4	7.6	13.5	16.0	75.0

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band		Total Range		L		M		U		L		M		U	
f_L - f_U		$\bar{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
0.2-500	DC-500	5.18	0.10	7.0	8.5	55	45	50	35	35	30	50	40	36	30	30	20

1 dB COMP.: +1 dBm typ.

L = low range [f_L to $10 f_L$]

m = mid band [$2f_L$ to $f_U/2$]


M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
0.20	30.20	8.36	59.54	51.65	1.28	1.46
0.50	30.50	6.85	57.86	50.98	1.26	1.41
2.00	32.00	6.13	56.96	50.94	1.25	1.39
10.00	40.00	5.43	55.15	50.65	1.24	1.48
32.45	62.45	5.43	51.84	49.39	1.21	1.45
64.69	94.69	5.61	48.95	47.53	1.20	1.42
100.00	70.00	5.53	47.52	46.53	1.20	1.39
145.30	115.30	5.74	45.03	44.48	1.19	1.38
177.55	147.55	5.41	42.85	42.69	1.17	1.36
200.00	170.00	5.73	41.70	41.72	1.17	1.37
225.92	195.92	5.49	40.73	40.61	1.16	1.36
258.16	228.16	5.71	39.01	39.00	1.16	1.42
290.41	260.41	5.50	38.47	38.33	1.16	1.43
322.65	292.65	5.79	37.73	37.34	1.19	1.51
354.90	324.90	5.52	36.24	35.86	1.20	1.53
387.14	357.14	5.63	35.26	34.80	1.22	1.58
419.39	389.39	5.74	35.03	34.31	1.24	1.58
435.51	405.51	5.66	35.44	34.71	1.26	1.62
467.75	437.75	6.15	35.03	34.13	1.30	1.67
500.00	470.00	5.98	34.57	33.52	1.32	1.65

Electrical Schematic

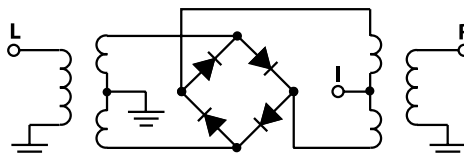

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. B
M108294
ZP-10514
DJ/TD/CP
070402
Page 1 of 2

Performance Charts

ZP-10514+ ZP-10514

