



Spherical Face Micrometers

SERIES 395, 295, 115

Technical Data

Accuracy: Refer to the list of specifications
Flatness: .000024" / 0.6µm
Display*: LCD
Battery*: SR44 (1 pc.), **938882**
Battery life*: Approx. 2.4 years under normal use
Dust/Water protection level*: IP65
*Digital models **Analog models


Function of Digital Model

Origin-set, Zero / ABS, Data hold, Data output,
inch/mm conversion (on inch/metric models only)
Function lock
Alarm: Low voltage, Counting value composition error

Optional Accessories for Digital Model

05CZA662: SPC cable with data switch (40" / 1m)
05CZA663: SPC cable with data switch (80" / 2m)

Spherical anvil-spindle type



FEATURES

- IP65 water/dust protection (Series 395).
- Designed to measure the wall thickness of various tubing.
- With ratchet stop for constant force.
- With SPC output (Series 395).
- Non-slip grip finish (digital models).
- With digit counter (Series 295).
- With a standard bar except 0 -1" and 0 - 25mm model.
- Supplied in fitted plastic case.



115-153



395-371-30

SPECIFICATIONS

Metric Digital model with spherical anvil					
Range	Resolution	Order No.	Accuracy	Remarks	Mass (g)
0 - 25mm	0.001mm	395-251-30^{S-F}	±2µm	D: 15mm	270
		395-271-30^{S-S}	±2µm	D: 15mm	270
25 - 50mm	0.001mm	395-252-30^{S-F}	±2µm	D: 15mm	330
		395-272-30^{S-S}	±2µm	D: 15mm	330
50 - 75mm	0.001mm	395-253-30^{S-F}	±2µm	D: 19mm	470
		395-273-30^{S-S}	±2µm	D: 19mm	470
75 - 100mm	0.001mm	395-254-30^{S-F}	±3µm	D: 20mm	625
		395-274-30^{S-S}	±3µm	D: 20mm	625

S-F: Spherical anvil and flat spindle
S-S: Spherical anvil and spherical spindle

Metric Mechanical counter model with spherical anvil					
Range	Graduation	Order No.	Accuracy	Remarks	Mass (g)
0 - 25mm	0.01mm	295-115^{S-F}	±3µm	D: 10mm	220
		295-215^{S-S}	±3µm	D: 10mm	220

S-F: Spherical anvil and flat spindle
S-S: Spherical anvil and spherical spindle

Metric With spherical anvil					
Range	Graduation	Order No.	Accuracy	Remarks	Mass (g)
0 - 25mm	0.01mm	115-115^{S-F}	±3µm	D: 10mm	180
		115-215^{S-S}	±3µm	D: 10mm	180
25 - 50mm	0.01mm	115-116^{S-F}	±3µm	D: 11mm	240
		115-216^{S-S}	±3µm	D: 11mm	240
50 - 75mm	0.01mm	115-117^{S-F}	±3µm	D: 17mm	315
		115-217^{S-S}	±3µm	D: 17mm	315
75 - 100mm	0.01mm	115-118^{S-F}	±4µm	D: 18mm	375
		115-218^{S-S}	±4µm	D: 18mm	375

S-F: Spherical anvil and flat spindle
S-S: Spherical anvil and spherical spindle

Inch/Metric Digital model with spherical anvil					
Range	Resolution	Order No.	Accuracy	Remarks	Mass (g)
0 - 1" / 0 - 25.4mm	.00005" / 0.001mm	395-351-30^{S-F}	±.0001"	D: .59"	270
		395-371-30^{S-S}	±.0001"	D: .59"	270
1" - 2" / 25.4 - 50.8mm	.00005" / 0.001mm	395-352-30^{S-F}	±.0001"	D: .59"	330
		395-372-30^{S-S}	±.0001"	D: .59"	330
2" - 3" / 50.8 - 76.2mm	.00005" / 0.001mm	395-353-30^{S-F}	±.0001"	D: .75"	470
		395-373-30^{S-S}	±.0001"	D: .75"	470
3" - 4" / 76.2 - 101.6mm	.00005" / 0.001mm	395-354-30^{S-F}	±.00015"	D: .79"	625
		395-374-30^{S-S}	±.00015"	D: .79"	625

S-F: Spherical anvil and flat spindle
S-S: Spherical anvil and spherical spindle

Inch Mechanical counter model with spherical anvil					
Range	Graduation	Order No.	Accuracy	Remarks	Mass (g)
0 - 1"	.0001"	295-153^{S-F*}	±.00015"	D: .40"	220
		295-253^{S-S*}	±.00015"	D: .40"	220

S-F: Spherical anvil and flat spindle
S-S: Spherical anvil and spherical spindle
*.0001" reading is obtained with vernier.

Inch With spherical anvil					
Range	Graduation	Order No.	Accuracy	Remarks	Mass (g)
0 - 1"	.0001"	115-153^{S-F*}	±.00015"	D: .40"	180
		115-253^{S-S*}	±.00015"	D: .40"	180
1 - 2"	.001"	115-242^{S-S}	±.00015"	D: .44"	240
2 - 3"	.001"	115-243^{S-S}	±.00015"	D: .67"	315

S-F: Spherical anvil and flat spindle
S-S: Spherical anvil and spherical spindle
*.0001" reading is obtained with vernier.

Tube Micrometers

SERIES 395, 295, 115— Spherical and Cylindrical Anvils

FEATURES

- IP65 water/dust protection (Series 395).
- Designed to measure the wall thickness of various tubing.
- The Tube Micrometers have two combinations of measuring faces (carbide-tipped): spherical-flat type.
- With ratchet stop for constant force.
- With SPC output (Series 395).
- With digit counter (Series 295).
- With a standard bar except 0 - 1" and 0 - 25mm model.
- Supplied in fitted plastic case.
- Non-slip grip finish (digital models).

Pin Anvil Type



395-261-30



SPECIFICATIONS

Metric Digital model with cylindrical anvil

Range	Resolution	Order No.	Accuracy	Remarks	Mass (g)
0 - 25mm	0.001mm	395-261-30	±3μm	Type A	270
		395-262-30	±3μm	Type B	270
		395-263-30	±3μm	Type C	310
		395-264-30	±3μm	Type D	310

Metric Mechanical counter model

Range	Graduation	Order No.	Accuracy	Remarks	Mass (g)
0 - 25mm	0.01mm	295-302	±3μm	Type A	210

Metric With cylindrical anvil

Range	Graduation	Order No.	Accuracy	Remarks	Mass (g)
0 - 25mm	0.01mm	115-302	±3μm	Type A	180
		115-308	±3μm	Type B	180
		115-315	±3μm	Type C	180
		115-316	±3μm	Type D	180
25 - 50mm	0.01mm	115-303	±3μm	Type A	240
		115-309	±3μm	Type B	240

Inch/Metric Digital model with cylindrical anvil

Range	Resolution	Order No.	Accuracy	Remarks	Mass (g)
0 - 1" / 0 - 25.4mm	.00005" / 0.001mm	395-362-30	±.00015"	Type B	270
		395-363-30	±.00015"	Type C	310
		395-364-30	±.00015"	Type D	310



Inch Mechanical counter model

Range	Graduation	Order No.	Accuracy	Remarks	Mass (g)
0 - 1"	.0001"	295-313	±.00015"	Type C	210
		295-314	±.00015"	Type D	210

Inch With cylindrical anvil

Range	Graduation	Order No.	Accuracy	Remarks	Mass (g)
0 - 1"	.0001"	115-305	±.00015"	Type A	180
		115-313*	±.00015"	Type C	180
		115-314*	±.00015"	Type D	180

*.0001" reading is obtained with vernier.

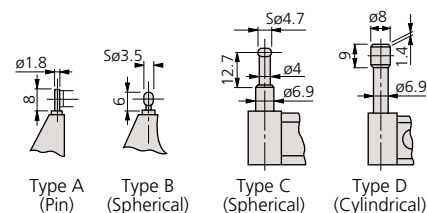

Anvil	D	L
Type A	2	4
Type B	3.6	4
Type C	4.8	12
Type D	8.2	22

ØD: Mini. inside dia. of tubing
Spindle face: Carbide tipped



Technical Data

Accuracy: Refer to the list of specifications.
Flatness: .000024" / 0.6μm
Display*: LCD
Battery*: SR44 (1 pc.), 938882
Battery life*: Approx. 2.4 years under normal use
Dust/Water protection level*: IP65
*Digital models

Function of Digital Model

Origin-set, Zero / ABS, Data hold, Data output, inch/mm conversion (on inch/metric models only)
Function lock
Alarm: Low voltage, Counting value composition error

Optional Accessories for Digital Model

05CZA662: SPC cable with data switch (40" / 1m)
05CZA663: SPC cable with data switch (80" / 2m)



Type A



Type B



Type C



Type D