


WIRE CRIMP
SYMBOL 26-22


WIRE CRIMP				TERMINAL CRIMP HEIGHT
CRIMP SYMBOL	DIM	GO	NO GO	
26-22	C	.063	.069	




INSULATION CRIMP
SYMBOL 26-22

INSULATION CRIMP				TERMINAL CRIMP HEIGHT
CRIMP SYMBOL	DIM	GO	NO GO	
26-22	G	.035	.055	

AT #1 POSITION



"G" DIM. AT
POSITION 1



INSULATION CRIMP



WIRE CRIMP

ENLARGED END VIEW OF GAGES


SUGGESTED GAGE DESIGN

NUMBER			
46222			
G-1	Loc M was R	PP	9/17/57
G	REV & REDRAWN	BL	12/2/57
LTR	REVISION RECORD	DR	CHK
DATE			

- CRIMP GAGE DIMENSIONS APPLY WHEN TOOL IS CLOSED OR BOTTOMED BUT NOT UNDER PRESSURE.
- FOR REPLACEMENT OF PARTS SUCH AS PINS AND SNAP RINGS, ORDER REPAIR KIT NO. 12 218-4.
- FOR REPLACEMENT OF PARTS OTHER THAN PINS AND SNAP RINGS, TOOL IS TO BE RETURNED TO AMP INC. HARRISBURG, PENNA. TO INSURE PROPER CERTI-CRIMP ADJUSTMENT.
- FOR TOOL USAGE, SEE INSTRUCTION SHEET NO. 1538.
- HAND TOOL CAN BE CHECKED BY MEASURING TERMINAL CRIMP HEIGHT.

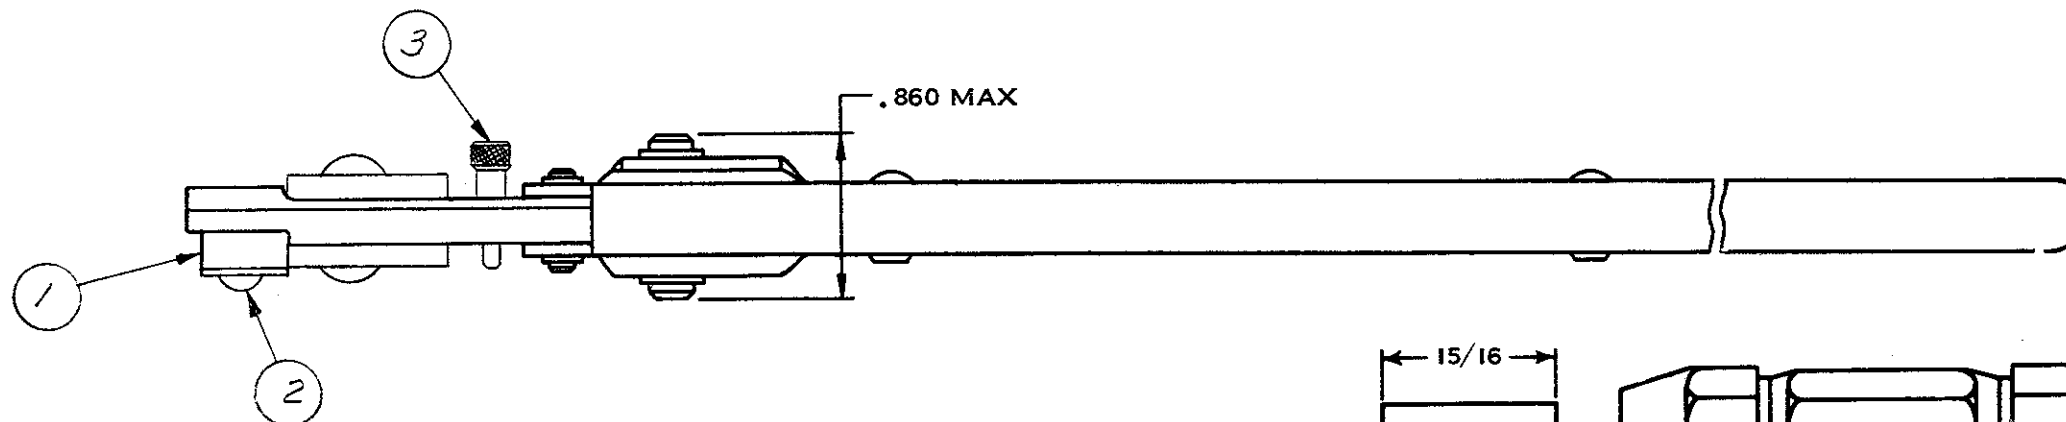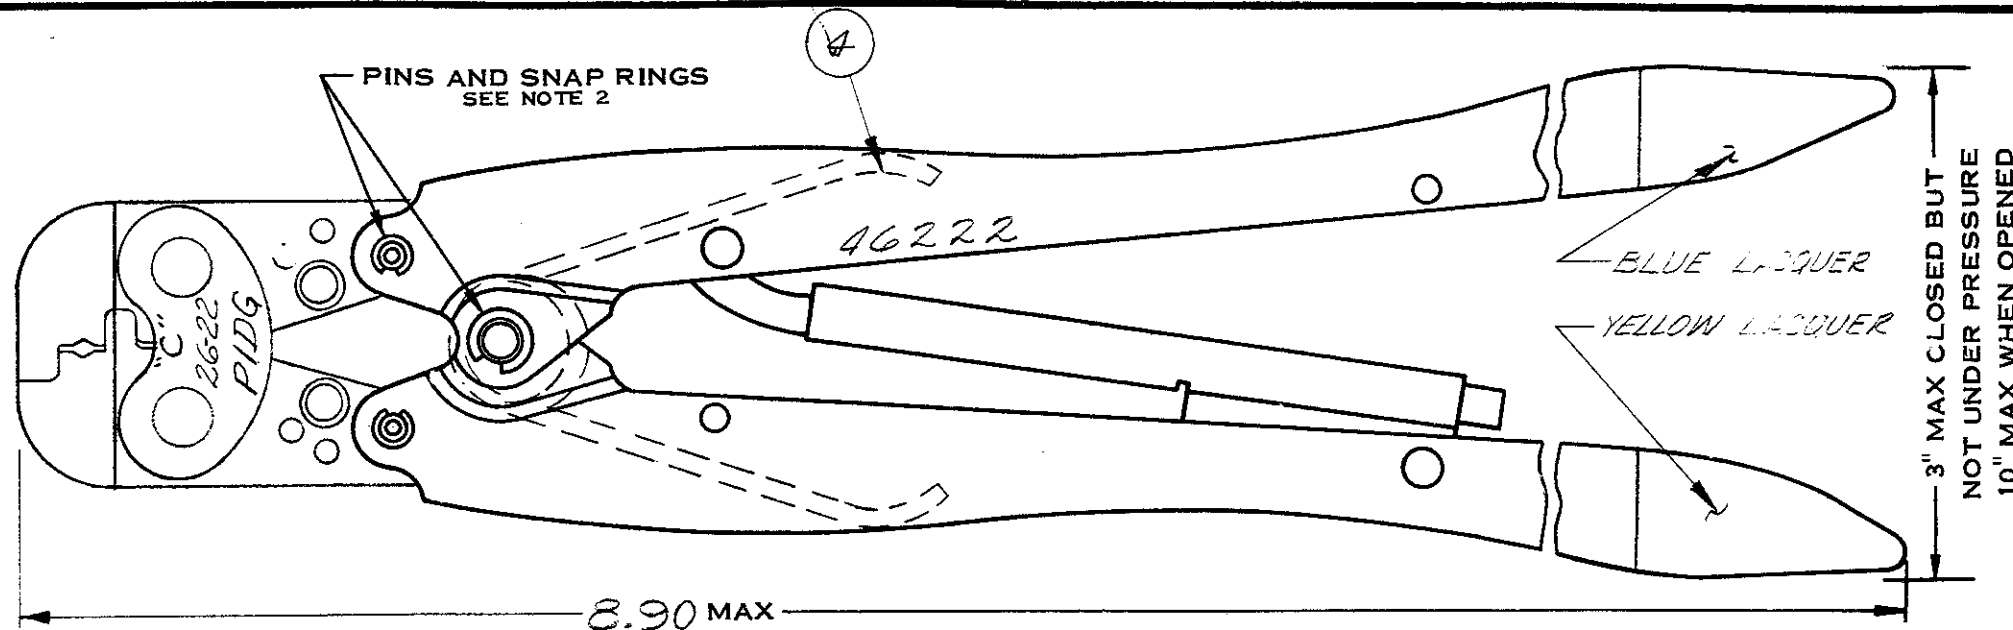

15/16
SIDE VIEW
OF GAGE

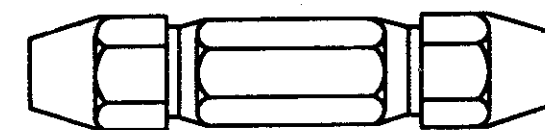

SUGGESTED
DOUBLE END HANDLE A.G.D. STD.

1	39364	SPRING-HANDLE	4
2	39207	PIN-ADJUSTMENT	3
1	3-21016-7	SCREW (#8-32 x 3/8 LSTH.)	2
1	125461-1	LOCATOR	1
NO. REQD	NUMBER	NAME	ITEM NO.

©1957 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY
REFERENCE ONLY

DR T.R. Williams 11/19/57	MATERIAL-STEEL FINISH-BLACK OXIDE WEIGHT-1 LBS. 3 OZ.	AMP INCORPORATED HARRISBURG, PENNA.
CHK T. Keliagher 12/2/57	WIRE - RANGE - INSULATION TYPE SHORT HANDLE TOOL	CLASS
DE E.J. FINK 12-5-57	TOLERANCE EXCEPT AS NOTED	LOC M B NO 46222 REV G-1
APP E.J. FINK 12-5-57	NAME DOUBLE ACTION HAND TOOL	

CUSTOMER DRAWING