


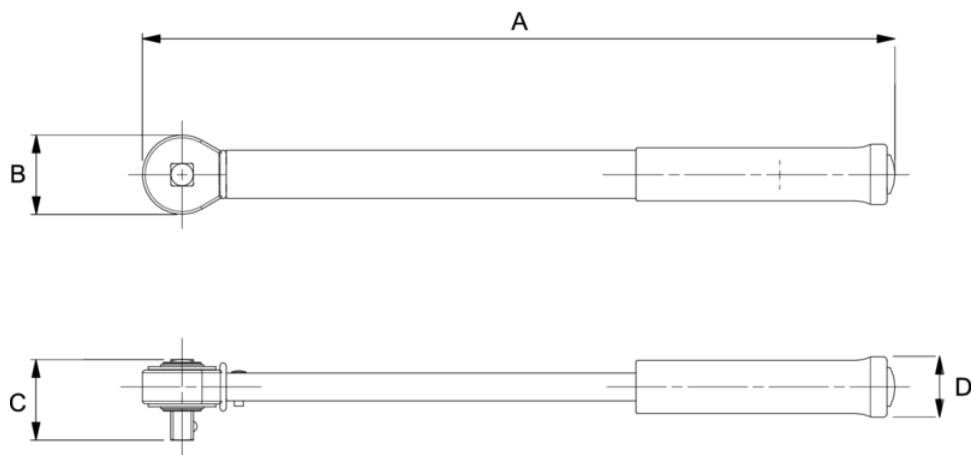

Product								A	B	C	D	
501MRMHW	0.5 ozf.in		10-50 lbf.in		1.4-5.4 N-m	2.5 lb	1/4 in	9.6 in	0.861 in	0.531 in	1.06 in	
1501MRMHW	5 ozf.in	0.12 lbf.in	20-150 lbf.in		2.8-15.3 N-m	0.9 lb	1/4 in	9.8 in	0.861 in	0.531 in	1.06 in	22.7 in
1002MFRMHW	0.5 ozf.in	0.7 lbf.in		10-100 lbf.ft	16.9-132.2 N-m	2.55 lb	3/8 in	15.6 in	1.145 in	0.714 in	1.4 in	
1502MRMHW	5 ozf.in	0.12 lbf.in	20-150 lbf.in		2.8-15.3 N-m	0.85 lb	3/8 in	9.8 in	0.856 in	0.600 in	1.06 in	
10002MRMHW	5 ozf.in	0.6 lbf.in	150-1000 lbf.in		19.8-110.2 N-m	2.5 lb	3/8 in	15.6 in	0.856 in	0.600 in	1.4 in	
2002MRMHW	1 ozf.in	0.12 lbf.in	30-200 lbf.in		4.0-22.0 N-m	3.2 lb	3/8 in	10 in	0.856 in	0.600 in	1.06 in	
2502MRMHW	1 ozf.in	0.12 lbf.in	30-250 lbf.in		4.0-27.7 N-m	0.85 lb	3/8 in	10.9 in	0.856 in	0.600 in	1.06 in	
7502MRMHW	5 ozf.in	0.6 lbf.in	100-750 lbf.in		14.1-81.9 N-m		3/8 in	15.3 in	0.856 in	0.600 in	1.4 in	
752MFRMHW	0.5 ozf.in	0.7 lbf.in		5-75 lbf.ft	10.2-98.3 N-m	2.5 lb	3/8 in	15.4 in	1.145 in	0.714 in	1.4 in	
2503MFRMHW	1 ozf.in	1.4 lbf.in		30-250 lbf.ft	47-332 N-m	3.15 lb	1/2 in	24.3 in	1.592 in	0.904 in	1.4 in	
1503MFRMHW	1 ozf.in	1.4 lbf.in		250-150 lbf.ft	34-194 N-m	3.15 lb	1/2 in	18.8 in	1.592 in	0.904 in	1.4 in	
25003MRMHW	10 ozf.in	1.2 lbf.in	300-2500 lbf.in		39.6-276.9 N-m	0.95 lb	1/2 in	19.2 in	1.592 in	0.904 in	1.4 in	
4004MFRMHW	5 ozf.in	3.4 lbf.in		80-400 lbf.ft	85-491 N-m	10.3 lb	3/4 in	34.2 in	2.47 in	2.35 in	1.4 in	
6004MFRMHW	5 ozf.in	6.8 lbf.in		120-600 lbf.ft	162-813 N-m	11.85 lb	3/4 in	41.1 in	2.47 in	2.35 in	1.15 in	
10005MFRMHW	5 ozf.in	6.8 lbf.in		200-1.000 lbf.ft	305-1.322 N-m	25.1 lb	1 in	70.2 in	3.12 in	2.84 in	1.5 in	

Product								A	B	C	D	
501MRMHW	0.5 ozf.in		10-50 lbf.in		1.4-5.4 N-m	2.5 lb	1/4 in	9.6 in	0.861 in	0.531 in	1.06 in	
1501MRMHW	5 ozf.in	0.12 lbf.in	20-150 lbf.in		2.8-15.3 N-m	0.9 lb	1/4 in	9.8 in	0.861 in	0.531 in	1.06 in	22.7 in
1002MFRMHW	0.5 ozf.in	0.7 lbf.in		10-100 lbf.ft	16.9-132.2 N-m	2.55 lb	3/8 in	15.6 in	1.145 in	0.714 in	1.4 in	
1502MRMHW	5 ozf.in	0.12 lbf.in	20-150 lbf.in		2.8-15.3 N-m	0.85 lb	3/8 in	9.8 in	0.856 in	0.600 in	1.06 in	
10002MRMHW	5 ozf.in	0.6 lbf.in	150-1000 lbf.in		19.8-110.2 N-m	2.5 lb	3/8 in	15.6 in	0.856 in	0.600 in	1.4 in	
2002MRMHW	1 ozf.in	0.12 lbf.in	30-200 lbf.in		4.0-22.0 N-m	3.2 lb	3/8 in	10 in	0.856 in	0.600 in	1.06 in	
2502MRMHW	1 ozf.in	0.12 lbf.in	30-250 lbf.in		4.0-27.7 N-m	0.85 lb	3/8 in	10.9 in	0.856 in	0.600 in	1.06 in	
7502MRMHW	5 ozf.in	0.6 lbf.in	100-750 lbf.in		14.1-81.9 N-m		3/8 in	15.3 in	0.856 in	0.600 in	1.4 in	
752MFRMHW	0.5 ozf.in	0.7 lbf.in		5-75 lbf.ft	10.2-98.3 N-m	2.5 lb	3/8 in	15.4 in	1.145 in	0.714 in	1.4 in	
2503MFRMHW	1 ozf.in	1.4 lbf.in		30-250 lbf.ft	47-332 N-m	3.15 lb	1/2 in	24.3 in	1.592 in	0.904 in	1.4 in	
1503MFRMHW	1 ozf.in	1.4 lbf.in		250-150 lbf.ft	34-194 N-m	3.15 lb	1/2 in	18.8 in	1.592 in	0.904 in	1.4 in	

Product								A	B	C	D	
<u>25003MRMH</u> <u>W</u>	10 ozf.in	1.2 lbf.in	300-2500 lbf.in		39.6-276.9 N·m	0.95 lb	1/2 in	19.2 in	1.592 in	0.904 in	1.4 in	
<u>4004MFRMH</u> <u>W</u>	5 ozf.in	3.4 lbf.in		80-400 lbf.ft	85-491 N·m	10.3 lb	3/4 in	34.2 in	2.47 in	2.35 in	1.4 in	
<u>6004MFRMH</u> <u>W</u>	5 ozf.in	6.8 lbf.in		120-600 lbf.ft	162-813 N·m	11.85 lb	3/4 in	41.1 in	2.47 in	2.35 in	1.15 in	
<u>10005MFRMH</u> <u>W</u>	5 ozf.in	6.8 lbf.in		200-1.000 lbf.ft	305-1.322 N·m	25.1 lb	1 in	70.2 in	3.12 in	2.84 in	1.5 in	

Williams Micrometer Torque Wrench

