


SV Series

Super Value Balances

Features

- Multiple Weighing Units (g, oz, dwt, ozt.)
- Piece Counting Mode with multiple sample selection
- Simple Operation
- Sealed Key Panel protects against dust and spills
- Operates from standard 9 volt battery (included)
- Auto Power Off to conserve battery life
- Optional Carrying Case & AC Adapter
- One Year Warranty

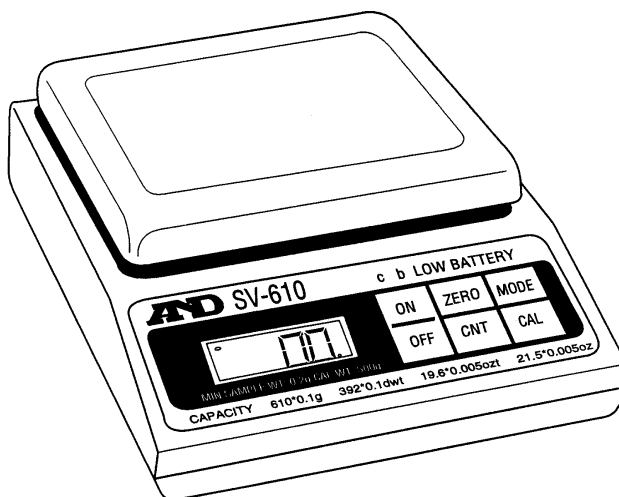

**Stainless Steel
Weighing Pan**

**Full Digital
Calibration**

Compact & light weight design

Specifications

	SV-120	SV-200	SV-250	SV-610
Gram	120 x 0.01	200 x 0.01	250 x 0.1	610 x 0.1
Decimal Ounces	4.2 x 0.001	7.0 x 0.001	8.8 x 0.005	21.5 x 0.005
Troy Ounce	3.8 x 0.001	6.4 x 0.001	8.0 x 0.005	19.6 x 0.005
Pennyweight	77 x 0.01	128 x 0.01	160 x 0.1	392 x 0.1
Counting Sample Size	10, 20, 50 or 100 pieces			
Repeatability/Std. Dev.	0.01 g	0.01 g	0.1 g	0.1 g
Stabilization Time	4 seconds (typically)			
Sensitivity Drift	± 30 ppm / °C(10°C~30°C)			
Operating Temperature	10°C~35°C			
Pan Size	Ø 3.5"	Ø 3.5"	4 x 4"	4 x 4"
Dimension W x D x H	4.6" x 6.5" x 2"			
Shipping Weight (Approx.)	15 oz.			
Power	9 Volt DC Battery (Std.) 11 Hours continuous usage (Alkaline)			
	Auto Power Off after 5 minutes of no activity			
	AC Adapter optional #TB:10 (110v.) #TB:22 (220v.)			
Calibration Weight	100 g	200 g	200 g	500 g
(optional)	AD-1600-100 G	AD-1600-200G	AD-1600-200G	AD-1600-500G

Specifications are subject to change without notice

Accessories & Options

- TB:10 Adapter (110V)
- TB:22 Adapter (220V)
- CC:4 Carrying Case

Fax-on-Demand

(800) 726-7099 / (408) 263-0560, Press 2

Document #71

www.andweighing.com

last saved:1/23/02

AND
A&D WEIGHING
...Clearly a Better Value



1555 McCandless Drive
Milpitas, CA 95035, USA
Toll Free: (800) 726-7099
Phone: (408) 263-5333
Fax: (408) 263-0119