



SEALFAST
THE SIMPLE SOLUTION

GAUGES




GAUGES - LIQUID

2-1/2" X 1/4" MOUNT -
STEEL CASE / BRASS INTERNALS

FEATURES & APPLICATIONS:

- Used in hydraulic and pneumatic systems, compressors, regulator machine, and suitable for fluid medium or gaseous which does not clog connection port or corrode stainless steel. Can use for severe service conditions where pulsation or vibration exist. Premium quality and long life.

Case Venting: Liquid filled gauges should be vented to atmosphere to relief internal case pressure prior to use. You can easily do this by turning the valve lever on the back of the gauge to the open position. Liquid-Fill gauges are typically shipped with the valve in the closed position.

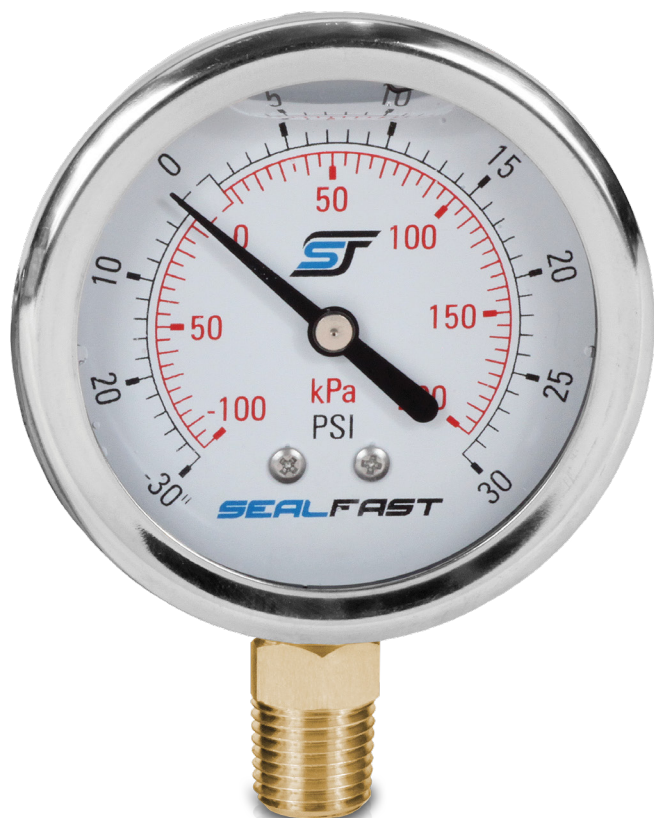

LM
Lower mount



UC
U-Clamp

TECHNICAL DATA:

- **CASE:** Stainless Steel
- **WINDOW:** Glass
- **INTERNAL:** Copper Alloy
- **CONNECTION:** Brass
- **ACCURACY:** $\pm 3/2/3\%$ of span
- **TEMPERATURE RANGE:** -4°F to 140°F

STEEL CASE / BRASS INTERNALS

Face Size	Mount	PSI	Part #	Part #
2-1/2"	1/4" NPT		LM	UC
		Vacuum 0-30" Hg	G25301PSV	G25302PSUV
		30 psi x 30" Hg Vac	G2530301PS	---
		15 psi / 103 kpa	G25151PS	G25152PSU
		30 psi / 200 kpa	G25301PS	G25302PSU
		60 psi / 400 kpa	G25601PS	G25602PSU
		100 psi / 700 kpa	G251001PS	G251002PSU
		160 psi / 1,100 kpa	G251601PS	G251602PSU
		200psi / 1,400 kpa	G252001PS	G252002PSU
		300 psi / 2,100 kpa	G253001PS	G253002PSU
		400 psi / 2,800 kpa	---	G254002PSU
		600 psi / 4,000 kpa	G256001PS	G256002PSU
		1,000 psi / 7,000 kpa	G2510001PS	G2510002PSU
		1,500 psi / 10,000 kpa	G2515001PS	---
		2,000 psi / 14,000 kpa	G2520001PS	G2520002PSU
		3,000 psi / 21,000 kpa	G2530001PS	G2530002PSU
		5,000 psi / 35,000 kpa	G2550001PS	G2550002PSU



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.