

XL-GPS

Time and Frequency Receiver

KEY FEATURES

- 12 Channel GPS Receiver with TRAIM
- Accurate to 30 Nanoseconds RMS UTC (USNO)
- Frequency Accuracy to 1×10^{-12}
- Vibrant LCD Display and Keypad
- Time code reader/generator
- Selectable Pulse Rates from 1PPS to 10 MPPS
- 10 MHz Frequency Output Standard
- Ethernet Network Port
- Telnet, SNMP and Serial Port for Monitoring and Control
- Network Time Server (NTP) Option
- Option Module Bay Supports:
 - Expansion Module
 - Alarm Relay
 - 1/5/10 MHz Frequency Module
 - Multicode Time Code Module
- Measurement Options
 - Time Interval/Event Timing
 - Frequency Measurement

KEY BENEFITS

- 12 channel GPS receiver provides high accuracy UTC time and frequency reference
- Built-in network port facilitates remote monitoring, configuration and control
- Easy setup via front panel display and keypad
- Multiple options available to extend signal generation and measurement capability
- Robust time code generation supports virtually any time code application
- RoHS 5/6 Compliant
- Remotely Software Upgradable

The XL-GPS Time and Frequency Receiver is a high performance, cost effective GPS based instrument that generates precise time and frequency signals referenced to Coordinated Universal Time (UTC). This high value, networked managed instrument is an excellent solution for test and measurement, central timing systems, process automation, range timing and power industry applications.

The XL-GPS is a part of Symmetricom's ultra precise model XLi time and frequency family of products. The XL-GPS offers cost-effective functionality and ease-of-use where the XLi offers modularity and extensibility through multiple option slots and modules.

At the XL-GPS core is a high performance disciplined oscillator. The internal, time optimized GPS receiver provides exceptional accuracy for time (< 30 nanoseconds to UTC) and frequency (better than 1×10^{-12}). A high performance oven oscillator option is available for improved stability and holdover performance.

A robust time code reader synchronizes to an existing time code as an alternative or backup to GPS. Time codes supported include IRIG A, B; IEEE 1344, and NASA 36 in both amplitude modulated and DC level shift formats.

The XL-GPS generates signals to synchronize a broad array of time and frequency equipment. Standard outputs include a 10 MHz sine wave, and pulse rates from 1 pulse-per-second (PPS) to 10 mega-pulses-per second (MPPS). A time code generator output supports synchronization of remote devices.

Easy configuration, control and monitoring is provided with multiple user interfaces. The bright LCD front panel display and keypad supports a convenient interface with at-a-glance system status or time-of-day. The built-in network port supports remote operation via telnet and SNMP monitoring. Local control is supported via a serial port and an alarm output can drive an alarm monitoring system.

A number of options are available to extend the standard suite of functions to meet application requirements. The Network Time Server (NTS) option enables the XL-GPS to function as a Stratum 1 Network Time Protocol (NTP) server to synchronize networked computers and devices.


The XL-GPS can optionally function as a sophisticated measurement device to analyze frequencies and pulses. The Frequency Measurement (FM) option supports analysis of 1,5,10 MHz frequencies. The Time Interval/Event Timing (TI/ET) option supports precise event pulse time tagging and time interval measurements with 5 nanosecond resolution.

An option module bay is available to extend the standard set of hardware outputs. The Expansion Module provides independent time code and pulse rate outputs. A 1,5,10 MHz/MPPS module provides additional frequency outputs. A Multicode module supports a wide range of IRIG time codes.

The XL-GPS delivers advanced performance at a lower cost with a versatile feature set to meet the most demanding applications.



XL-GPS Time and Frequency Receiver



XL-GPS Options

For Customizing the: XL-GPS Time and Frequency Receiver

OPTIONS

Software:

- Network Time Server
- Frequency Measurement
- Time Interval/Event Timing
- Programmable Pulse Output

Hardware:

- Oven Oscillator Upgrades
- 1, 5, 10 MHz/MPPS Frequency Outputs
- Multicode Output for IRIG A, B, E, G, H; XR3/2137 and NASA 36
- Expansion Module (4 outputs)
- Expansion Module (4 outputs) with Alarm Relay

Symmetricom makes it easy to configure the XL-GPS Time and Frequency Receiver to meet your specific application needs with a variety of hardware and software options. Whether your application demands network time protocol service, measurement capability or expanded time and frequency outputs, all it takes is the proper configuration of the instrument.

Not sure how to achieve what you want? Simply call Symmetricom's time and frequency experts. You can also configure your own XL-GPS system online at www.symmetricom.com.

The powerful options make it easy to adapt your XL-GPS configuration if your application needs change. The XL-GPS can accommodate multiple software options and one hardware option module. If additional outputs are required, the [XLi Time and Frequency System](#) is available in a 1U and 2U chassis that supports up to 4 and 10 option modules respectively.

For more than 30 years Symmetricom has defined premium time and synchronization solutions. Put our expertise to work for you.




XL-GPS Time and Frequency Receiver



XL-GPS Time and Frequency Receiver [back panel]

Network Time Server on Standard Network Port

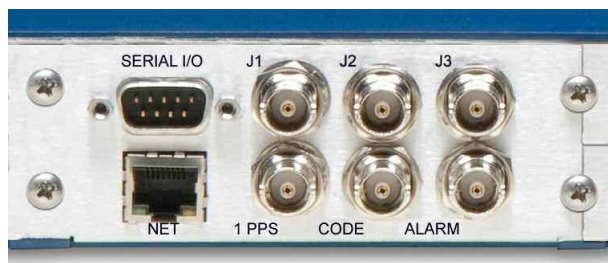

- Synchronize servers and workstations across the network
- High-bandwidth NTP capability
- High availability time referenced to XL-GPS
- MD5 security protocol
- NTP broadcast mode
- SNMP Enterprise MIB
- Stratum 1 operation via GPS satellites

The high performance Symmetricom Network Time Server (NTS) represents a breakthrough in network synchronization technology. By combining a high-speed/high-capacity network interface and a wide range of network protocol support, XL-GPS seamlessly integrates into existing networks.

The NTS distributes time to precisely synchronize client computer clocks over a network. Time is acquired from the host XL-GPS and distributed over the network using the Network Time Protocol (NTP). Client computer clocks can be synchronized within milliseconds. Information on the health and status of the NTP server and the primary time synchronization source is available by using the SNMP protocol Enterprise MIB. Also, MD5 security protocol is included to authenticate NTP client-server communication. The standard network port, when factory enabled, serves as the NTP server via an RJ-45 Ethernet connector.

No additional hardware is needed for this option; it utilizes the XL-GPS standard network port, leaving the option slot available.

SPECIFICATIONS: NETWORK TIME SERVER OPTION 87-8017

NETWORK PROTOCOLS

- Network time protocols
 - NTP v3/v4 (RFC 1305)
 - SNTP (RFC 1769)
 - TIME (RFC 868)
 - MD5 (RFC 1321)
- Other protocols
 - Telnet (RFC 854)
 - FTP (RFC 959)
 - MIB II (RFC 1213)
 - SNMP v2 Enterprise MIB II (RFC 1157)
- Network transport protocol: TCP/IP
- Simple Network Management Protocol (SNMP)
 - SNMP provides the network administrator with network status and statistics. This feature implements SNMP versions 1 & 2 and Management Information Base (MIB) I and II.
- Network interface: 10/100 Base-T Ethernet
- Network time accuracy: 1 to 10 mS typical
- Accuracy: Function of input synchronization source (IRIG or GPS)

CLIENT SOFTWARE

An NTP client/daemon is required for client-side synchronization with any network time server. Included with the NTP option is Symmetricom's SymmTime NTP client for Windows® 95/98/NT/2000/XP/Vista. Comprehensive [Domain Time II](#) time client, server & management software for easy distribution, management and monitoring of time across the network is also available.

Programmable Pulse Output

The Programmable Pulse Output option is a software option that provides a user configurable TTL level pulse output that can be used to supply a precisely synchronized "trigger" pulse at specific times or provide periodic pulse outputs. The rising edge of the trigger output may be programmed with microsecond resolution for fine control. The periodic pulse rates supports several popular frequencies such as 1 PPS, 1 PP 10 SEC, 1 PPM, 1 PP 10 MIN, 1 PPH, 1 PP 10 HR, 1 PPD, 1 PP 10 DAYS or 1 PP 100 DAYS are available. The pulse width is also programmable. The pulse is supplied via a rear panel BNC.

SPECIFICATIONS: PROGRAMMABLE PULSE OUTPUT (PPO) 87-8024

- Range: 500kHz to 1 PP Year (integer multiples of 1 uS)
- Pulse width: Programmable in 1µS steps up to 1 year
- On time edge: Rising
- Amplitude: TTL Levels into 50Ω
- Accuracy: 200nSec

Frequency Measurement

The Frequency Measurement is a software option that provides the ability to precisely measure the frequency of an externally applied 1, 5, or 10 MHz signal. Measurement resolution is better than 120×10^{-12} with only a 1-second averaging time. It supports a periodic, zero dead-time mode of operation as well as a single-shot, measurement-on-demand mode. The measurement interval can be specified in integer seconds over the range of 1 to 100,000 seconds. Frequency measurement results appear on the front panel display and are output via the network and serial ports.

SPECIFICATIONS: FREQUENCY MEASUREMENT 87-8025

INPUT FREQUENCIES

- Keypad selectable frequencies of 1, 5, 10 MHz.
 - Input Level: 1.0 to 10 Vpp
 - Input Impedance: $1k\Omega$ or 50Ω
 - Measurement Range: $\pm 1 \times 10^{-6}$ maximum offset; compares the external frequency under test directly to the clock's disciplined oscillator
 - Input Frequency: 1 MHz, 5 MHz, 10 MHz
 - Resolution:
 - 120×10^{-12} @ 1 second
 - 12×10^{-12} @ 10 seconds
 - 1×10^{-12} @ 100 seconds
- Accuracy:
 - TCXO
 - 1×10^{-9} @ 1 second
 - 2×10^{-10} @ 100 seconds
 - 1×10^{-12} @ 1 day
 - Ovenized quartz
 - 1×10^{-10} @ 1 second
 - 1×10^{-10} @ 100 second
 - 1×10^{-12} @ 1 day

Time Interval/Event Timing

TIME INTERVAL

The Time Interval function is a software option that provides the user with the ability to precisely measure the interval between the time of occurrence of the clock-derived 1 Hz reference pulse and the rising edge of the user-supplied 1 Hz pulse.

EVENT TIMING

The Event Timing feature offers the capability of locating the time of occurrence of the rising edge of the applied pulse with respect to the time of year. A "burst" mode provides increased performance during short intervals. The collected data is available via the serial or the Telnet port.

SPECIFICATIONS: TIME INTERVAL/EVENT TIMING (TI/ET) 87-8026

INPUT FREQUENCIES

- Rate: 1 PPS
- High level: Logic Hi $>1.25V$ $<10V$
- Low level: Logic Low $<1.25V$ $>0V$
- Active edge: Rising (Positive)
- Pulse width: 100 nS minimum
- Input impedance: $>1k$, or 50Ω

TIME INTERVAL FEATURE

- Measurement
 - Rate: 1 per second
 - Resolution: 5 nS
 - Accuracy: ± 5 nS (+ clock accuracy**)
 - Range: 0.0 to 1 year

* Display: Time into the second, updated once per second, is displayed to the nanosecond until another event occurs or until the "TIME", "STATUS", or "POSITION" push-button is pressed.

EVENT TIMING FEATURE

- Measurement
 - Rate: 10/second or 100/second burst
 - Resolution: 5 nS
 - Accuracy: ± 5 nS (+ clock accuracy**)
 - Range: 0.0 to 1 year


* Display: Event Time occurrence, hundreds of days through nanoseconds, is displayed until another event occurs or until the "TIME", "STATUS", or "POSITION" push-button is pressed.

** For clock accuracy see accuracy of host unit.

Oscillators

Symmetricom's XL-GPS receiver takes full advantage of the excellent long-term stability of the GPS system to steer or "discipline" the instrument's local oscillator. This process dramatically enhances performance by removing the long-term aging and drift of the oscillator without operator intervention.

Symmetricom provides a full spectrum of ultra-precise frequency reference standards for every application. The upgrades to the XL-GPS standard Temperature Compensated Voltage Controlled Crystal Oscillator (TCVCXO) is the Ovenized Crystal Oscillator (OCXO). For applications requiring higher performance oscillators, the XLi offers rubidium atomic oscillators and high stability ovenized oscillators.

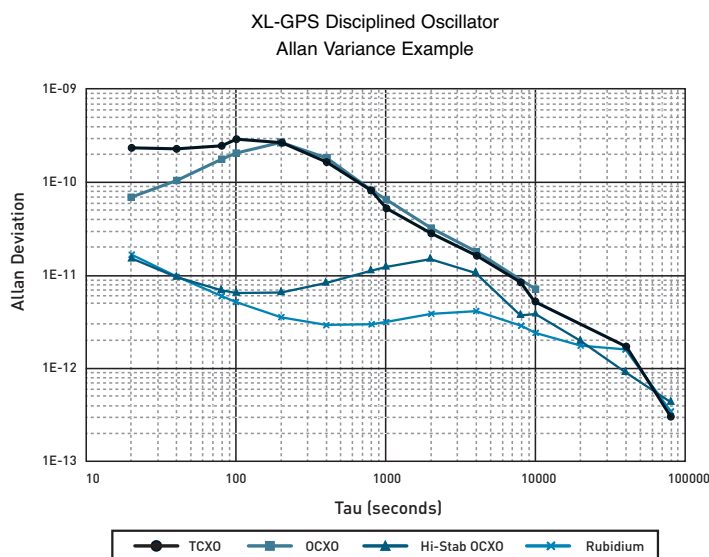

OSCILLATORS SPECIFICATIONS (TYPICAL)

TCVCXO (Standard in XL-GPS)

- Accuracy: Function of input synchronization source (GPS, IRIG)
- Frequency/timing Allan Deviation
- Stability
 - 1×10^{-9} @ 1 sec
 - 2×10^{-10} @ 1000 sec
 - 1×10^{-12} @ 24 hours
- Temperature: 5×10^{-7} , over 0°C to 50°C when not locked to a reference

OCXO OSCILLATOR OPTION 87-399-30

- Accuracy: Function of input synchronization source (GPS, IRIG, 1PPS)
- Frequency/timing Allan Deviation
 - Stability:
 - 1×10^{-10} @ 1 sec
 - 1×10^{-10} @ 1000 sec
 - 1×10^{-12} @ 24 hours
- Temperature: 1×10^{-8} , over 0°C to 50°C when not locked to a reference
- Aging: 5×10^{-9} per 24 hours

Multicode Output



- Programmable formats
- Up to four code outputs
- Codes available: IRIG A, B, E, G, H; XR3/2137 and NASA 36


Select the various time code formats by using any of the three interfaces available: the front panel keypad and display, the RS-232/422 serial port, or the standard network port. The available time code format menu contains IRIG A, B, E, G, H; XR3/2137, and NASA 36.

SPECIFICATIONS: MULTICODE OUTPUT 87-6002-XL1

- Amplitude modulated;
 - Amplitude into 50Ω: 0–3 Vpp, adjustable via internally accessible potentiometer
 - Amplitude into 600Ω: 0–10 Vpp, adjustable via internally accessible potentiometer
 - Modulation ratio: 2:1 to 5:1 adjustable via internally accessible potentiometer
- Connector: BNC
- Quantity: 4
- Output impedance: 25Ω
- Accuracy: Function of input synchronization source (GPS, IRIG)
- Time codes

IRIG A 130	IRIG A 133	IRIG B 120	IRIG B 123
IRIG E 111	IRIG E 112	IRIG E 121	IRIG E 122
IRIG G 141	IRIG G 142	IRIG H 111	IRIG H 112
IRIG H 121	IRIG H 122	2137	XR-3
NASA-36 (All codes in 24 hour format)			
- Time references: Standard, UTC, GPS, or Local
- Compliance: RoHS Category 9 Exempt

1, 5, 10 MHz/MPPS

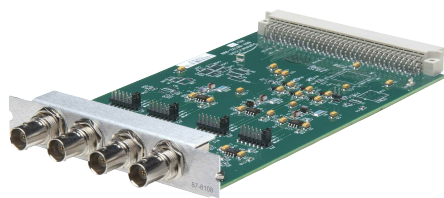

The 1, 5, 10 MHz/MPPS Output card provides four precise sine wave or square wave through four BNC outputs. These outputs are phased-locked to the host receiver's disciplined reference oscillator. They are automatically enabled upon power-up, and are independently selectable by the user with no configuration setup required.

Outputs are preconfigured at the factory. Please specify desired outputs on the sales order.

SPECIFICATIONS: 1, 5, 10 MHz/MPPS OUTPUT 87-8108


1, 5, or 10 MHz OUTPUT

- Amplitude: 1 Vrms into 50Ω
- Harmonic distortion: -30 dBc
- Synchronization: Phase locked to the clock 10 MHz
- Accuracy: Function of input synchronization source (GPS, IRIG)
- Connector: Female, BNC

1, 5, or 10 MPPS OUTPUT

- Amplitude: TTL into 50Ω
- Duty cycle: 50%
- Synchronization: Phase locked to the clock 10 MHz
- Accuracy: Function of input synchronization source (GPS, IRIG)

Expansion Module

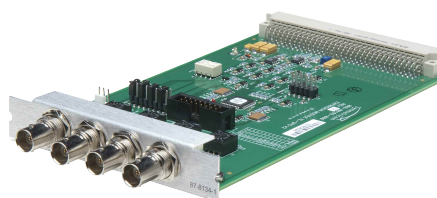

The Expansion Module is a versatile option that expands the number of standard time code and pulse rate outputs from the XL-GPS. Four independent, user configurable outputs are provided. The output signals are selectable via an on-module rotary switch. Specify output signal configuration at time of order. A version of the module is also available supporting an alarm relay output.

The available output signal types are as follows:

- Time Code AM/DC: Format mirrors XL-GPS standard code output (IRIG A,B; IEEE 1344 or NASA 36)
- Alarm
- Rates (1 PPS, 1 kPPS, 10 kPPS, 100 kPPS, 1 MPPS, 5 MPPS, 10 MPPS)
- Programmable Pulse (Requires PPO option to be installed)
- Alarm Relay (87-8134-2)

SPECIFICATIONS:

- EXPANSION MODULE 87-8134-1

- EXPANSION MODULE W/ ALARM RELAY 87-8134-2

General

Connector: Female BNC
Quantity: 4

Time Code

- Format: IRIG A, B; IEEE 1344 or NASA 36
- Amplitude (AM): 3.0 Vp-p +/-1V, into 50Ω
- Ratio (AM): 3:1 +/- 10%
- Amplitude (DC): TTL into 50Ω
- Phasing: In phase with carrier ± 10μS

Alarm

- Active High (Alarm state)
- Amplitude: TTL Levels into 50Ω

Rates

- Rate: 1 PPS, 1 kPPS, 10 kPPS, 100 kPPS, 1 MPPS, 5 MPPS, 10 MPPS
- Duty cycle: 60/40% +/- 10%
- Amplitude: TTL Levels into 50Ω

Programmable Pulse (Optional)

- On time edge: Rising
- Amplitude: TTL Levels into 50Ω

Alarm Relay 87-8134-2

- Connection: Terminal strip, COM, NO, NC
- Max Voltage: 48 VAC/VDC
- Max Current: 2A @ 24 VDC



SYMMETRICOM, INC.
2300 Orchard Parkway
San Jose, California
95131-1017
tel: 408.433.0910
fax: 408.428.7896
info@symmetricom.com
www.symmetricom.com