



WIRE CRIMP				TERMINAL CRIMP HEIGHT	
CRIMP SYMBOL	DIM	GO	NO GO		
20-16	○	.0855	.0905	#	#

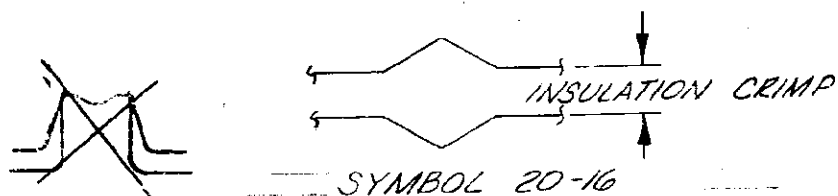


INSULATION CRIMP				TERMINAL CRIMP HEIGHT	
CRIMP SYMBOL	DIM	GO	NO GO		
20-16	G	.035	.035	#	#

AT #1 POSITION



INSULATION CRIMP





ENLARGED END VIEW OF GAGES

SUGGESTED GAGE DESIGN

U	REVISED	CT	MO	0-15-15
K-2	Loc. M WAS A	PL	-	9/1/65
K-1	ADDED OVERALL DIM'S.	BL	-	9/24/65
K	ADDED 39364 SPRING	GB	-	11/2/65
J	ADDED WHITE LACQUER	GB	-	11/2/65
J	125461-2 WAS 305109	GB	-	11/2/65
J	REVISED & REDRAWN	NR	-	9/23/64
LTR	REVISION RECORD	DR	CHK	DATE

NUMBER 46223

PINS AND SNAP RINGS
SEE NOTE 2

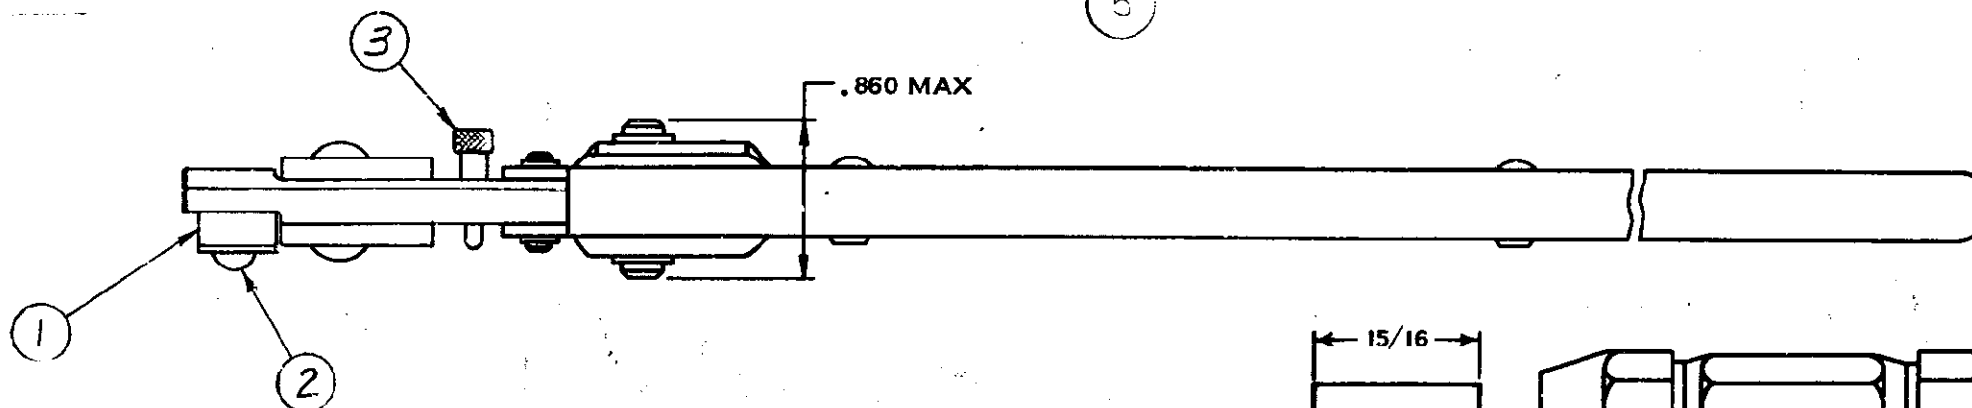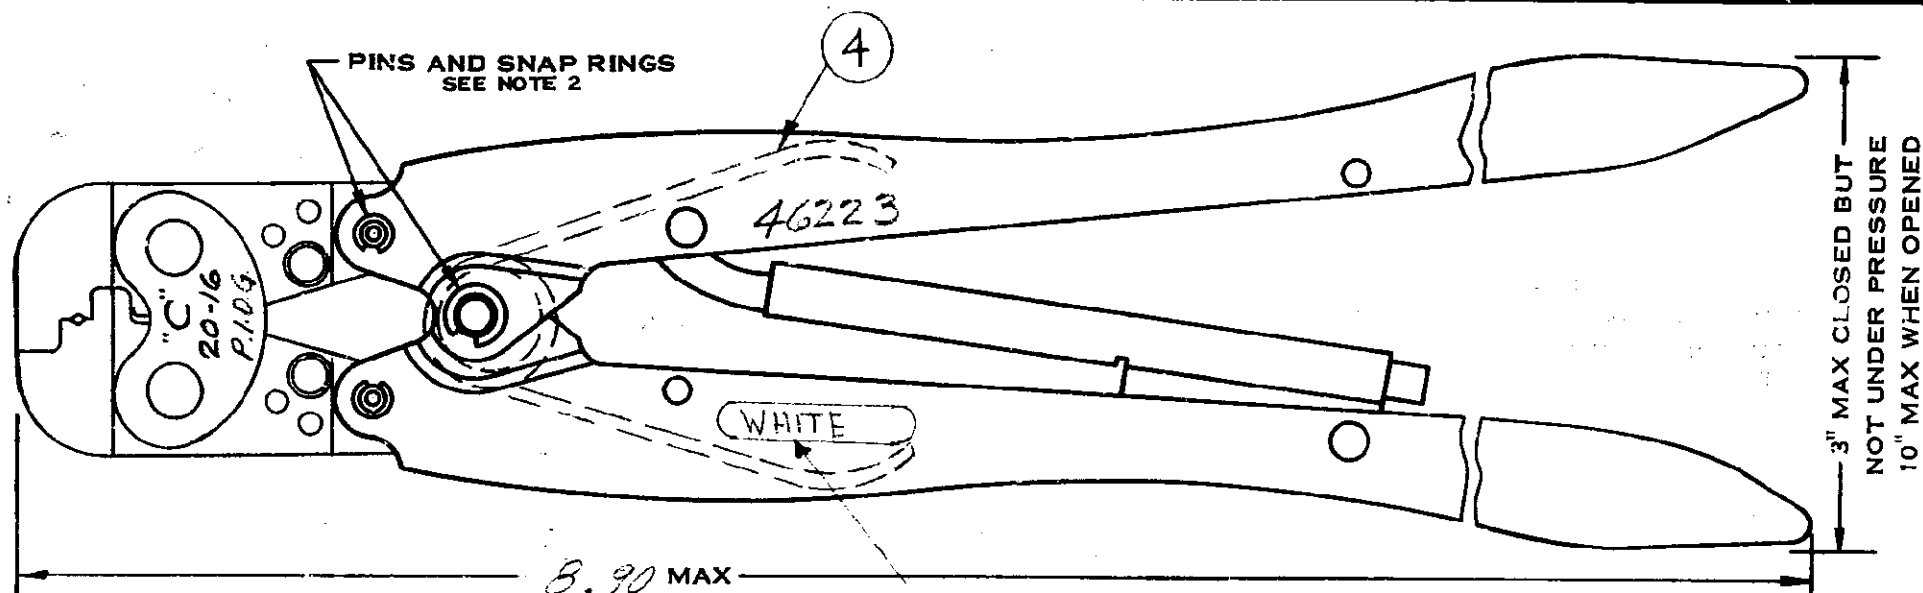

NO. REQD	NUMBER	NAME	ITEM NO.
1	313036-6	LABEL WHITE	5
1	39364	SPRING - HANDLE	4
2	39207	PIN - ADJUSTMENT	3
1	3-21016-7	SCREW (#8-32 X 3/8 LGTH.)	2
1	125461-2	LOCATOR	1

©1957 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY
REFERENCE ONLY

DR L. Daman 1-30-61	MATERIAL-STEEL FINISH-BLACK OXIDE WEIGHT-1 LBS. 3 OZ.	AMP INCORPORATED HARRISBURG, PENNA.
CHK E. J. Fink 2-3-61	WIRE - RANGE - INSULATION	CLASS
DE	TOLERANCE EXCEPT AS NOTED	TYPE
APP E. J. Fink 2-3-61	SCALE	LOC
	NAME	NO
		REV

DOUBLE ACTION HAND TOOL

CUSTOMER DRAWING

DIMENSIONS IN INCHES DO NOT SCALE PRINT

PRINT FILE 3