




869756

## SDR Series Micrometer Adjustable Click Wrench, 15 - 75 ft-lb



### PRODUCT DETAILS

- Adjust torque value by rotating the grip
- Grip lock makes locking in torque value fast, easy, and secure
- Tool changes from one end of the scale to the other with the fewest number of turns
- Ball-bearing rock-over assembly assures smooth operation enhances repeatability and increases wrench service life
- Accuracy of +/- 4% of Indicated Value from 20% to 100% of rated capacity
- Meets or exceeds requirements of ASME B107.300-2010 and ISO 6789
- Error Proofing By Guidance design provides a strong audible and tactile impulse when the set torque is achieved
- Error Proofing By Design flattened case provides the mechanism with superior support resulting in a wrench that is easier to calibrate and one that holds calibration longer
- Flattened case prevents side loading during torque application or testing/calibration
- Knurled grip offers an ergonomic grip that remains comfortable over long periods of use
- Ratchet is built for durability
- Ratchet replacement is fast and easy when needed
- All tools up to 250 ft-lb capacity come with a rugged, custom-molded plastic case
- Includes FREE tabulated calibration certificate from our ISO 17025 certified calibration laboratory
- PLEASE NOTE: See below for manuals & details drawings; click the drop down menu, click on specific product PDF, click the download button

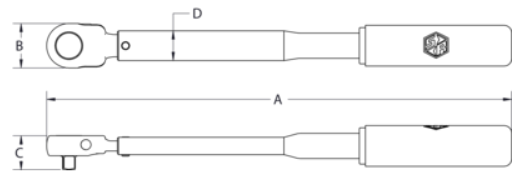

## PRODUCT ATTRIBUTES

Product: **869756**

|                                                                                    |            |                                                                                    |              |                                                                                    |            |
|------------------------------------------------------------------------------------|------------|------------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------------------|------------|
| <b>MODEL</b>                                                                       | 3SDR 75 MG |   | 15-75 lbf·ft |   | 0.5 lbf·ft |
|  |            |  |              |  | 3/8 in     |
| <b>A</b>                                                                           | 15.2 in    | <b>B</b>                                                                           | 1.4 in       | <b>C</b>                                                                           | 1.1 in     |
| <b>D</b>                                                                           | 0.9 in     | <b>lb</b>                                                                          | 1.5 lb       |                                                                                    |            |