

Surftest SJ-400

Catalog No. E4185-178



PORTABLE SURFACE ROUGHNESS TESTER

Mitutoyo

Surftest SJ-400 Series

Revolutionary New Portable Surface Roughness Testers Make Their Debut

Long-awaited performance and functionality are here: compact design, skidless and high-accuracy roughness measurements, multi-functionality and ease of operation.

Requirement

1

High-accuracy measurements with a hand-held tester

A wide range, high-resolution detector and an ultra-straight drive unit provide class-leading accuracy.

Detector

Measuring range: 800 μ m

Resolution: 0.000125 μ m (on 8 μ m range)

Drive unit

Straightness/traverse length

SJ-401: 0.3 μ m/25mm

SJ-402: 0.5 μ m/50mm



Requirement

3

Cylinder surface roughness measurements with a hand-held tester

The skidless measurement and R-surface compensation functions make it possible to evaluate cylinder surface roughness.

Requirement

2

Roughness parameters that conform to international standards

The SJ-400 series can evaluate 36 kinds of roughness parameters conforming to the latest ISO, DIN, and ANSI standards, as well as to JIS standards (1994/1982).

Requirement

4

Measurement/evaluation of stepped features and straightness

Ultra-fine steps, straightness and waviness are easily measured by switching to skidless measurement mode. The ruler function enables simpler surface feature evaluation on the LCD monitor.



Mitutoyo

Requirement





5

Advanced data processing with extended analysis

The SJ-400 series allows data processing identical to that in the high-end class. These data analysis and report creation capabilities are achieved using the surface roughness analysis program SURFPAK-SJ.



Measurement Applications

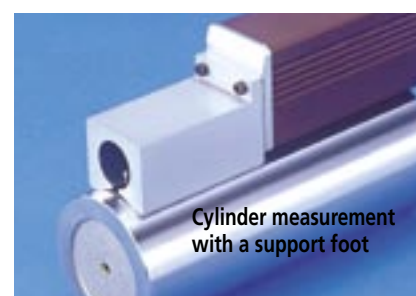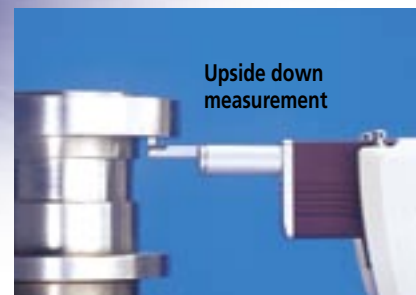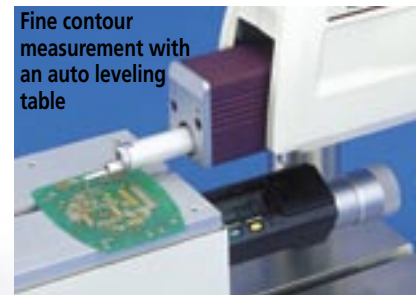
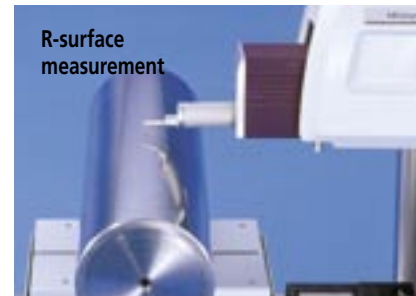


Requirement

6

Confirmation of measurement results and assessed profiles without a printout


The large, integrated, touch-panel LCD monitor clearly displays evaluation results and measured profiles.




The SJ-400 Series Performs Skidless Measurements

The SJ-400 series detector uses interchangeable nosepieces that allow skid- or skidless measurements to suit the type of measurement required.


Skidless measurement

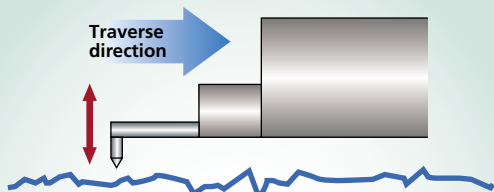


- Skidless measurement is where surface features are measured relative to the drive unit reference surface. This measures waviness and finely stepped features accurately, in addition to surface roughness, but range is limited to the stylus travel available.
- The SJ-400 series supports a variety of surface feature measurements simply by replacing the stylus.

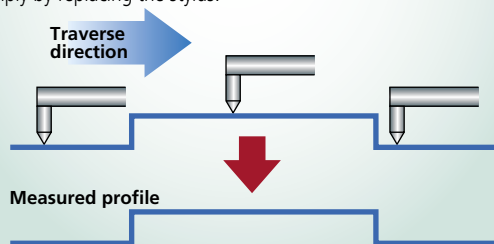

Skidded measurement

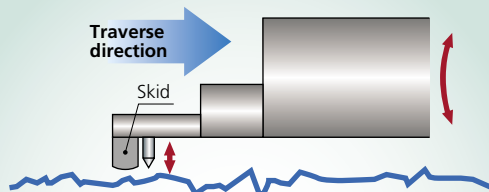


- In skidded measurements, surface features are measured with reference to a skid following close behind the stylus. This cannot measure waviness and stepped features exactly but measuring range is greater because the skid tracks the workpiece surface contour.

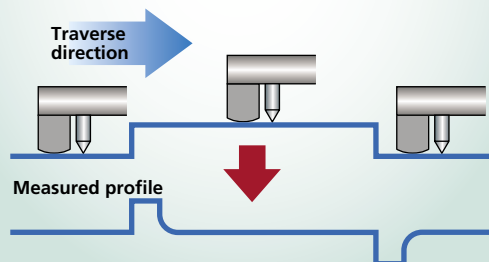


Tilt compensation function

- The Tilt Compensation Datum Points are selectable from all of the profile (choose P1 and P2) or any arbitrary two sections on the profile (choose P1, P2, P3 and P4), as required. If you choose adjacent sections for tilt compensation then the characteristics of features of interest between these sections, such as scratch depth, etc, can be measured directly.

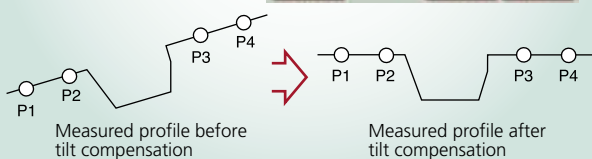

Simplified surface feature evaluation with the ruler function



- This function determines the coordinate difference between two arbitrary points so feature characteristics, such as step height and width, etc, can be measured.

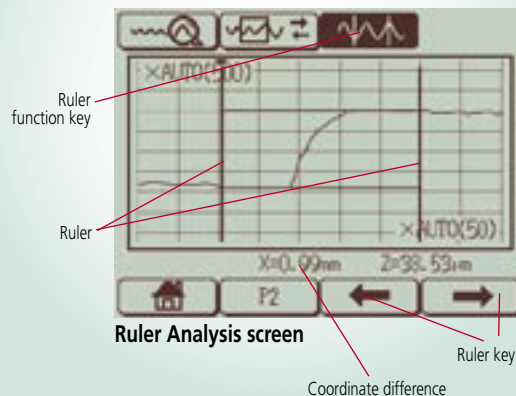


Powerful Support for Leveling

The height/tilt adjustment unit comes as standard for leveling the drive unit prior to making skidless measurements and, supported by guidance from the unique DAT function, makes it easy to achieve highly accurate alignment.

The DAT Function

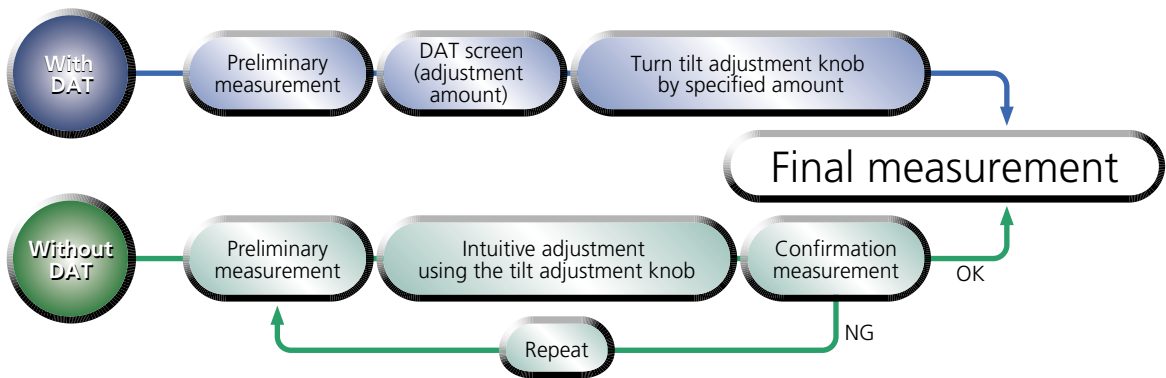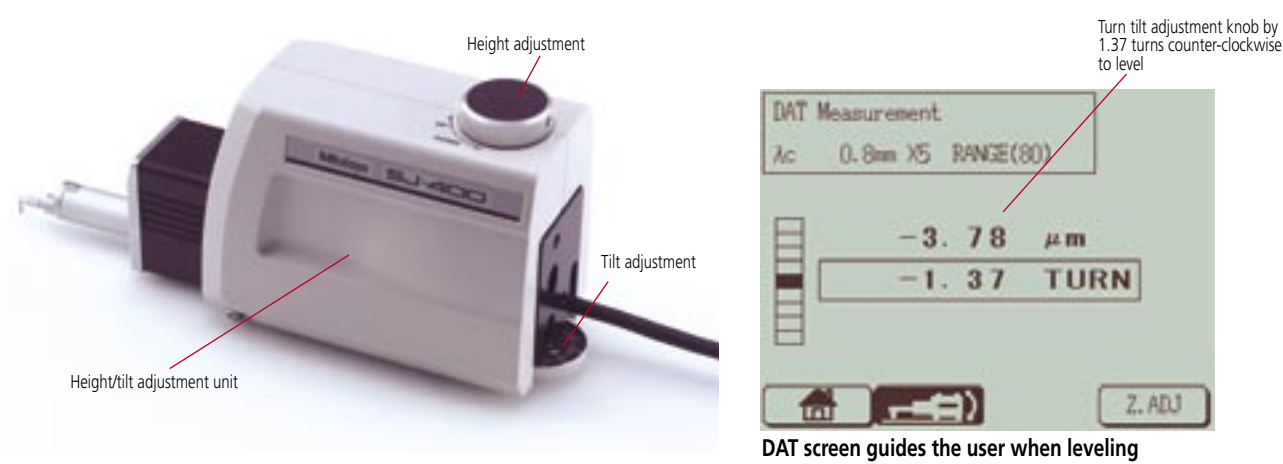

DAT Function for the optional leveling table

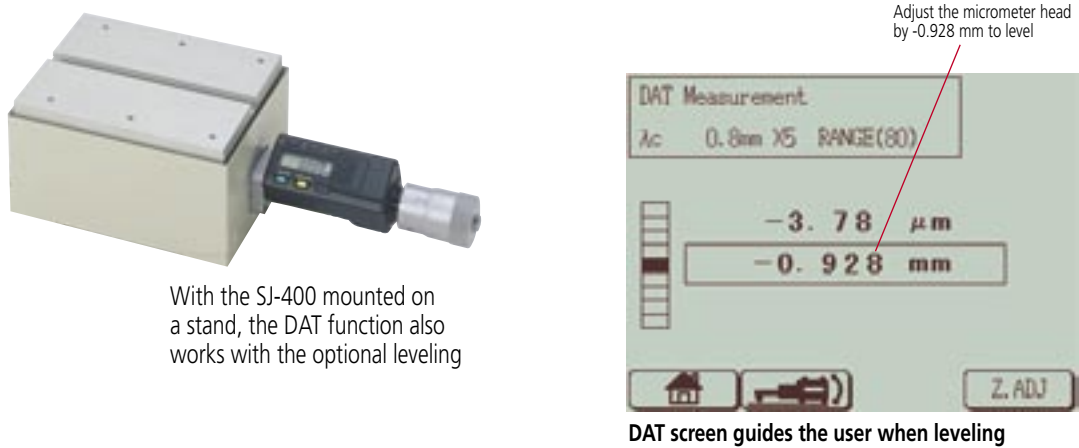


More Measuring Functions Than Expected From a Compact Tester


Measuring curved-surface roughness

(skidless measurement)

Usually, a spherical or cylindrical surface (R-surface) cannot be evaluated, but, by removing the radius with a filter, R-surface data is processed as if taken from a flat surface.

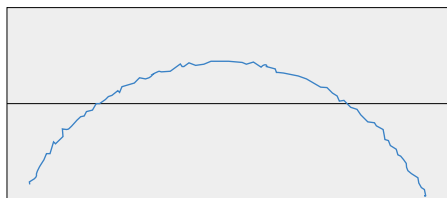

R-Surface compensation

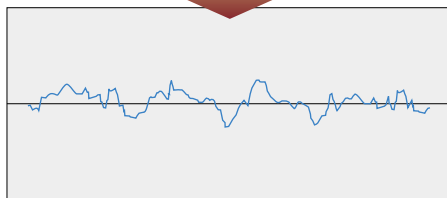


Statistics

Statistical processing can be performed on multiple measurements for one roughness parameter. Histograms can be displayed and printed in addition to statistical results (mean, standard deviation, maximum/minimum value and acceptance ratio).



Statistical

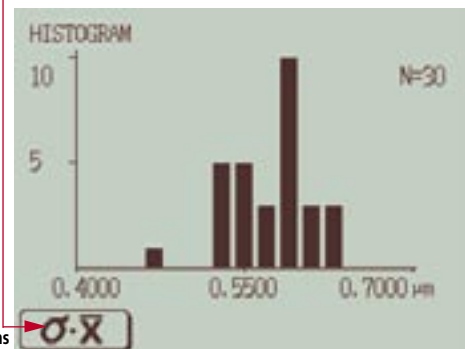


Switchable

Histograms


Built-in thermal printer

A high quality, high-speed thermal printer prints out measured results. It can also print a BAC curve or an ADC curve as well as calculated results and assessed profiles. These results and profiles are printed out in landscape format, just as they appear on the LCD, in easy-to-understand form.

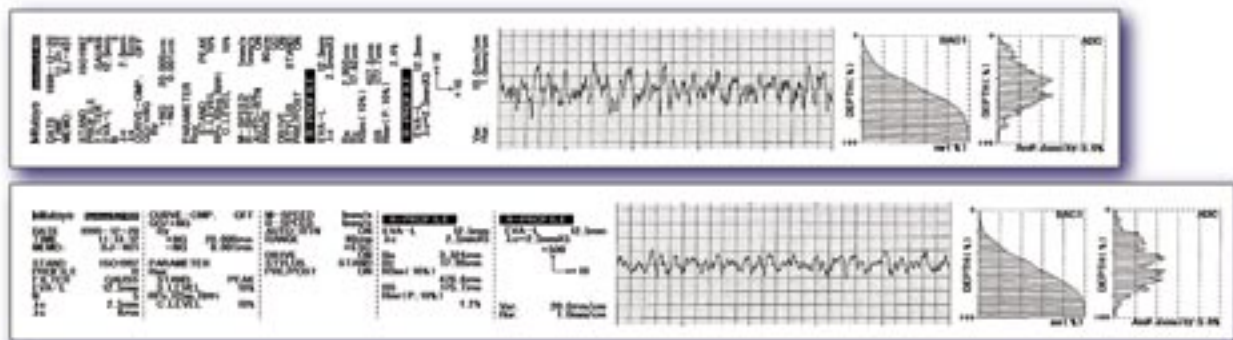

GO/NG indication

Upper and lower tolerance limits can be set for up to 3 roughness parameters. A GO/NG indication is displayed after a measurement. The calculation result is highlighted if NG.

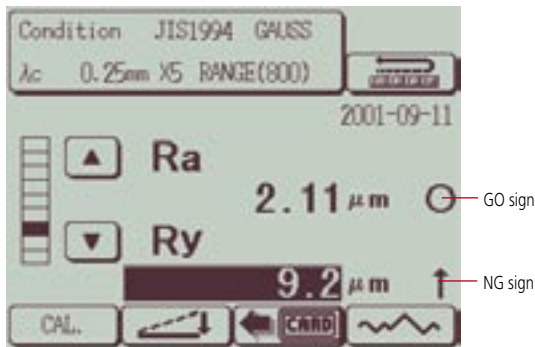

Calculation Result screen with GO / NG judgment result

Real sampling

This function samples stylus displacement for a specified time without engaging detector traverse. This function has a wide range of uses, such as a simplified vibration meter or a displacement gage incorporated in another system.

Recalculating


Previously measured data can be recalculated for use in other evaluations by changing the current standard, assessed profile and roughness parameters.

Arbitrary length measurement

This function allows a sampling length to be arbitrarily set in 0.1mm increments (SJ-401: 0.1mm to 25mm, SJ-402: 0.1mm to 50mm). It also allows the SJ-400 series to make both narrow and wide range measurements.

Key masking

Locks out input from the touch panel keys. This eliminates the possibility of the operator accidentally changing the calibration or measurement conditions.

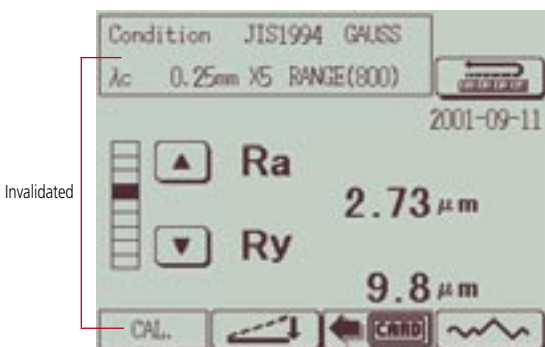

Auto-Calibration

The SJ-400 series is equipped with Ra calibration and step calibration methods for detector calibration (gain adjustment). In both calibration methods only the calibrated value of the precision specimen needs to be entered. No other operations are required to calibrate the tester.



Calibration screen

Storing/recalling measured data and conditions

The measurement conditions and data can be stored in the control unit or memory card (optional) and recalled as required. Batch printout of data after on-site measurement improves measuring efficiency.

Storage capacity

Measurement conditions	Control unit: 5 conditions Memory card: 20 conditions
Measurement data	Memory card: 50 or more pieces of data

Customizing

The SJ-400 series can be set up to calculate and display only a subset of the roughness parameters available. Parameters can be added later for recalculation, if required.






Customized screen

Wide Choice of Evaluation Possibilities with Analyzing Program

Surface roughness analyzing program SURFPAK-SJ

The SURFPAK-SJ program gives the SJ-400 series the same excellent operability and advanced analysis performance achieved by high-end desktop testers. More roughness parameters and analysis graphs are available, unnecessary data can be filtered out and surface features, including step and pitch, can easily be evaluated. SURFPAK-SJ transforms this small machine into the equivalent of a high-end desktop evaluation system.

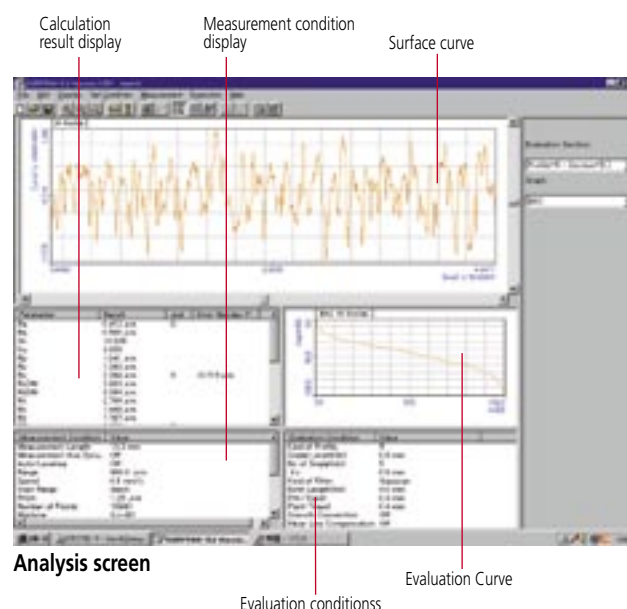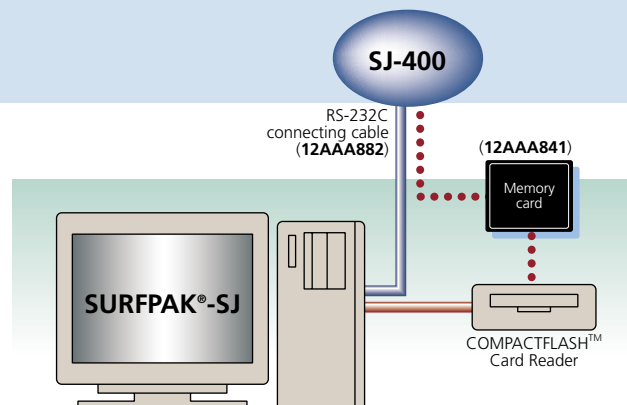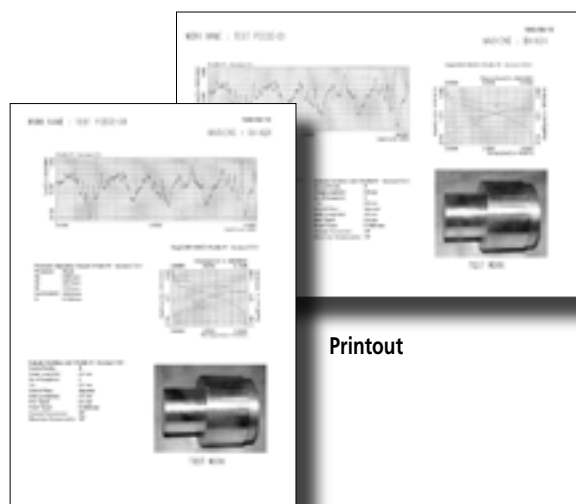

SURFPAK-SJ Specification

Industrial standards met	ISO 4287:1997, ANSI / ASME B46.1-1995, JIS B0601 1994, etc.
Assessed profiles	P (primary profile), R (roughness profile), WC, WCA, WE WEA DIN4776 profile, E (envelope residual profile), R - motif (roughness/waviness motif)
Evaluation Parameters	P, R, WC, WCA, WE, WEA, DIN4776, E R - motif W - motif
	Ra, Rq, Rz (JIS), Ry, Ry (DIN), Rc, Rpi, Rp, Rpmx Rvi, Rv, Rvmax, Rti, Rt, R3zi, R3z, R3y, S, Pc (Ppi), Sm, HSC, mr, δc , plateau ratio, mrd, Rk, Rpk, Rvk, Mr1, Mr2, Δa , Δq , λa , λq , Sk, Ku, Lo, Lr, A1, A2 Rx, RAR, SR, SAR, NR, NCRX, CPM Wte, Wx, W, AW, SW, SAW, NW
Analysis graphs	ADC, BAC1, BAC2, power spectrum chart, auto-correlation chart, Walsh power spectrum chart, Walsh auto-correlation chart, slope distribution chart, local peak distribution chart, parameter distribution chart
Digital filter	2CR-75%, 2CR-50%, 2CR-75% (phase corrected), 2CR-50% (phase corrected), Gaussian -50% (phase corrected)
Cutoff length*	λc : 0.025mm, 0.08mm, 0.25mm, 0.8mm, 2.5mm, 8mm, 25mm or arbitrary value (.001", .003", .01", .03", .1", .3", 1" or arbitrary value) fl: 0.25mm, 0.8mm, 2.5mm, 8mm or arbitrary value (.01", .03" or arbitrary value) fh: 0.25mm, 0.8mm, 2.5mm, 8mm or arbitrary value (.01", .03" or arbitrary value)
Sampling length (L)*	0.025mm, 0.08mm, 0.25mm, 0.8mm, 2.5mm, 8mm, 25mm or arbitrary value (.001", .003", .01", .1", .3", 1") or arbitrary value
Data compensation	Tilt compensation, R-plane (curved surface) compensation, ellipse compensation, parabola compensation, hyperbola compensation, Conic automatic compensation, polynomial compensation, polynomial automatic compensation
Data deletion function	- Data deletion to avoid an over-range error - Data deletion in a specific range to perform recalculation - Automatic data deletion (according to conditions set previously)
Recording magnifications	Vertical: 100X - 500,000X Horizontal: 1X - 10,000X
Special functions for report generation	- Bit-map image paste-up function - Multiple data layout function
OS requirement	Windows®95 / Windows®98 / Windows®NT4.0

*Arbitrary can be specified in the following range: from 0.3mm (.012") to the values maximum traverse length.



Carrying case
is a standard accessory

Specification

Order No.*		SJ-401	178-946-2 (mm)	178-947-2 (inch/mm)	178-956-2 (mm)	178-957-2 (inch/mm)
		SJ-402	178-940-2 (mm)	178-945-2 (inch/mm)	178-958-2 (mm)	178-959-2 (inch/mm)
Measuring method			Skidless/Skidded measurement			
Measuring range	Z-axis	800μm, 80μm, 8μm (32000μin, 3200μin, 320μin) (Up to 2,400μm with an option stylus)				
	X-axis	SJ-401: 25mm (1") SJ-402: 50mm (2")				
Drive method	Straightness	SJ-401: 0.3μm/25mm (12μin/1") SJ-402: 0.5μm/50mm (20μin/2")				
	Measuring speed	0.05, 0.1, 0.5, 1.0mm/s (.002", .004", .02", .04"/s)				
	Return speed	0.5, 1.0, 2.0 mm/s (.02", .04", .08"/s)				
Height-Tilt adjustment unit	Tilt adjustment range	±1.5°				
	Height adjustment amount	10mm/.39"				
Assessed profile			Primary profile (P), Roughness profile (R), Filtered waviness profile (W), DIN4776, MOTIF (R, W)			
Evaluation parameters			Ra, Ry, Rz, Rq, Pc, R3z, mr, Rt, Rp, Rv, Sm, S, δc, Rk, Rpk, Rvk, Mr1, Mr2, A1, A2, Lo, Ppi, R, AR, Rx, Δa, Δq, Ku, HSC, mrd, Sk, W, AW, Wte, Wx, Vo			
Analysis graphs			Bearing Area Curve (BAC), Amplitude Distribution Curve (ADC)			
Number of sampling length			X1, X3, X5, XL* (*=arbitrary length)			
Arbitrary length			SJ-401: 0.1 to 25mm (0.1mm increments) [.01" to 2" (.01" increments)] SJ-402: 0.1 to 50mm (0.1mm increments) [.04" to 2" (.01" increments)]			
Sampling length (L)			0.08, 0.25, 0.8, 2.5, 8mm (.003", .01", .03", .1", .3")			
Printing width			48mm (1.89")/paper width: 58mm (2.28")			
Recording magnification	Vertical magnification	10 to 100K magnification, Auto				
	Horizontal magnification	1 to 1K magnification, Auto				
Detector	Detection method	Differential inductance method				
	Minimum resolution	0.000125μm (8μm range)/.005μin (320μin range)				
	Stylus tip	Corn 90°, Radius 5μm, Diamond		Corn 60°, Radius 2μm, Diamond		
	Measuring force	4mN		0.75mN		
	Radius of skid	40mm/1.57"				
	Skid force	Less than 400mN				
Function	Customize	Display/Roughness parameter selectable				
	Data compensation	R-surface, Tilt compensation				
	Ruler function	Displays the coordinate difference of any two points				
	D.A.T. function	Helps to adjust leveling during skidless measurement				
	Displacement detection mode	Enables the stylus displacement to be input while the drive unit is stopped				
	Statistical processing	Maximum value, Minimum value, Mean value, Standard deviation (s), Pass ratio, Histogram				
	Tolerance judgment	Upper and lower limit values for three parameters can be specified				
	Measuring Condition storage	Five sets of measuring conditions (control unit)				
Printer			Thermal printer			
Cut-off length			0.08, 0.25, 0.8, 2.5, 8mm (.003", .01", .03", .1", .3")			
Digital filter			2CR, PC75 (phase corrected), Gauss			
Calibration			Ra, Step (Automatic calibration entering the value of roughness specimen)			
Power supply			Via AC adapter, built-in rechargeable battery (Ni-H)			
Battery	Charging time	15 hours				
	Number of measurements	600 maximum without printing				
Power consumption			43W (max.)			
Dimension	Control unit	307x165x94mm (12.09"x6.50"x3.7")				
	Height-Tilt adjustment unit	131x63x99mm (5.16"x2.48"x3.90"				
	Drive unit	SJ-401: 128x36x47mm (5.04"x1.42"x1.85")		SJ-402: 155x36x47mm (6.08"x1.41"x1.84")		
Roughness standard			JIS (JIS B0601-1994-1982), DIN, ISO, ANSI			
LCD size			Touch panel			
Data output			RS-232C input/output, SPC output			
External control			Connection to data processing system (option)			
Mass	Control unit	1.2kg (2.64lbs.)				
	Height-Tilt adjustment unit	0.4kg (1.88lbs.)				
	Drive unit	SJ-401: 0.6kg (1.32lbs.)		SJ-402: 0.64kg (1.41lbs.)		
Standard accessories			AC adapter, Carrying case, Printing paper, Touch pen, Protect sheet, Skidless nosepiece, User's manual, one-sheet manual, tools			

* To denote your AC line voltage add the following suffixes (e.g. **178-946-2A**). **A** for 120V, **C** for 110V, **D** for 220V, **E** for 240V, **No suffix** is required for 100V.


Optional Accessories

Detector

178-396-2: 0.75mN measuring force, with **12AAC731** standard type stylus (2 μ m tip radius)

178-397: 4mN measuring force, with **12AAB403** standard type stylus (5 μ m tip radius)

Set configuration/Dimensions

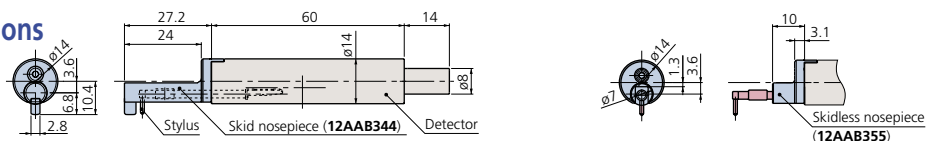


Unit: mm

Stylus	Applicable skid nosepiece
Standard type 12AAC731 (2 μ m)*1 12AAB403 (5 μ m) 12AAB415 (10 μ m) (): Tip radius	 12AAB344 12AAB345
Small hole type 12AAC732 (2 μ m)*1 12AAB404 (5 μ m) 12AAB416 (10 μ m) (): Tip radius	 12AAB346
Extra small hole type 12AAC733 (2 μ m)*1 12AAB405 (5 μ m) 12AAB417 (10 μ m) (): Tip radius	 12AAB347
Extra small hole type 12AAC734 (2 μ m)*1 12AAB406 (5 μ m) 12AAB418 (10 μ m) (): Tip radius	
Deep hole type 2 x stylus 12AAC740 (2 μ m) 12AAB413 (5 μ m) 12AAB425 (10 μ m) (): Tip radius	
 3 x stylus 12AAC741 (2 μ m)*1 12AAB414 (5 μ m) 12AAB426 (10 μ m) (): Tip radius	

*1 Tip angle is 60°


Skidless nosepiece



12AAB355


Stylus

Deep groove type*2




12AAC735 (2 μ m)*1
12AAB409 (5 μ m)
12AAB421 (10 μ m)
 (): Tip radius

Extra deep groove type*2




12AAC736 (2 μ m)*
12AAB408 (5 μ m)
12AAB420 (10 μ m)
 (): Tip radius

Extra deep groove type*2




12AAC737 (2 μ m)*1
12AAB407 (5 μ m)
12AAB419 (10 μ m)
 (): Tip radius

Gear face type

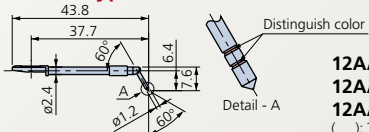


12AAB339 (2 μ m)*1
12AAB410 (5 μ m)
12AAB422 (10 μ m)
 (): Tip radius

WE-curve type




12AAB338

Knife edge type




12AAC738 (2 μ m)*1
12AAB411 (5 μ m)
12AAB423 (10 μ m)
 (): Tip radius

Eccentric type*2

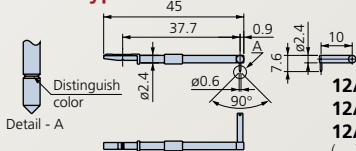


12AAC739 (2 μ m)*1
12AAB412 (5 μ m)
12AAB424 (10 μ m)
 (): Tip radius


Applicable skid nosepiece




12AAB349




12AAB350




12AAB351




12AAB352

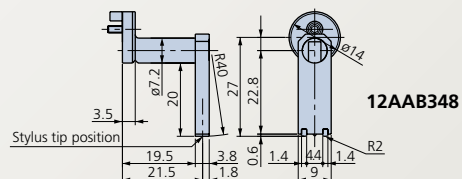

12AAB348

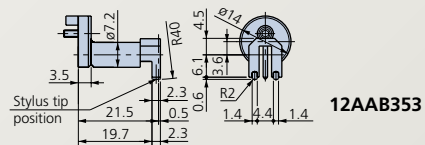

12AAB353

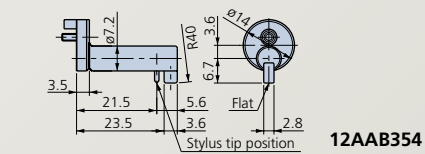

12AAB354

Optional Accessories

Stand, Tables


XY leveling tables



178-042-1 (mm)
178-052-1 (inch/mm)



178-043-1 (mm)
178-053-1 (inch/mm)

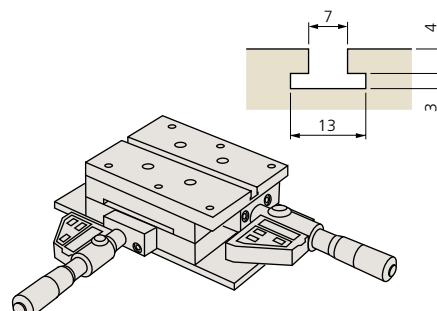

178-049 (mm)
178-059 (inch/mm)

Order No.	178-042-1,178-052-1	178-043-1,178-053-1	178-049,178-059
Table size	130 x 100mm/5.12" x 3.94"		
Maximum loading	15kgf		
Inclination angle	$\pm 1.5^\circ$		—
Horizontal rotating angle	$\pm 3^\circ$		—
X, Y axis displacement	$\pm 12.5\text{mm}/.49"$	$\pm 12.5\text{mm}/.49"$	$\pm 12.5\text{mm}/.49"$
Min. reading of the micrometer head	0.001mm/.00005"*	0.001mm/.001"*	0.001mm/.00005"*
Dimension	262 x 233 x 83mm	220 x 189 x 83mm	262 x 233 x 55mm
Mass	6.3kg	6kg	5kg

* Digital display

Precision vise

- Can be used with the XY leveling table.




178-019

Order No	178-019
Clamping method	Sliding jaws
Jaw opening	36mm/1.42"
Jaw width	44mm/1.73"
Jaw depth	16mm/.63"
Height	38mm/1.50"



Cylinder attachment

Used to attach on a cylinder
Diameter: $\varnothing 15\text{mm}$ up to 60mm

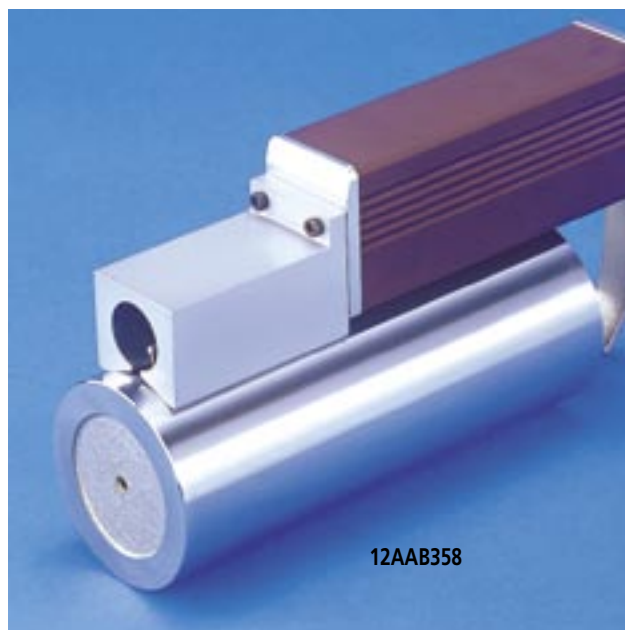

12AAB358



Manual column stand

Column travel: 200mm
Dimensions: 370x200x740mm
Mass: 13kg

178-009

Leveling table (for D.A.T. function)

- Can be used with the XY leveling tables.



Table swivels: $\pm 1.5^\circ$
Table size: 130x100mm
Max. Loading: 15kgf

178-048 (mm)

178-058 (inch/mm)



Measuring data output

Input tool

Data input device for spreadsheet software.




264-005

Others

Memory card


Stores/recalls the measuring conditions (up to 20), measured data, and statistical data.
Memory: 8MB



12AAA841

LCD protective sheet

For touch panel protection
(10 sheet set)

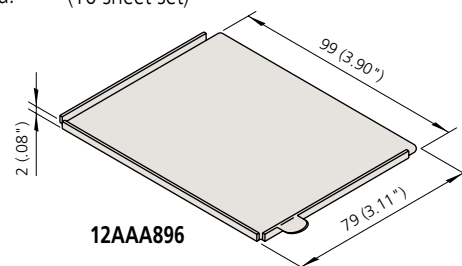

12AAA896

SPC connecting cables

Connects a control unit with DP-1VR.

1m: 936937

2m: 965014

Reference step specimen

Used to calibrate detector sensitivity.
Step nominal value: $2\mu\text{m}/10\mu\text{m}$



178-611 (mm)

178-612 (inch/mm)

DP-1VR

Performs various statistical processing



264-503 (100V)

264-503A (120V)

264-503D (220V)

264-503E (240/220V)

Printer paper


Five rolls (25m)

Standard paper:

Durable paper:

270732

12AAA879

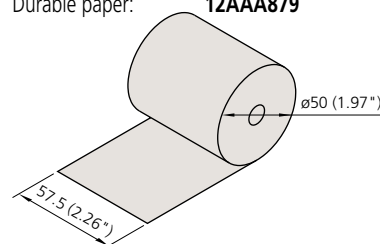



Specifications are subject to change without notice.

Coordinate Measuring Machines

Vision Measuring Systems

Surface, Form and Contour
Measurement

Optical Measuring

Sensor Systems

Hardness Measuring

Digital Scale and DRO Systems

Small Tool Instruments and
Data Management

Mitutoyo Corporation

20-1, Sakado 1-Chome,
Takatsu-ku, Kawasaki-shi,
Kanagawa 213-8533, Japan
Phone (044) 813-8230
Fax (044) 813-8231
<http://www.mitutoyo.co.jp>

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this pamphlet, as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs, dimensions and weights. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive.

Mitutoyo