




Charge Plate Assembly CPM-720A

Data Sheet

Converts PFM-711A Field Meter to a portable, battery operated charged plate monitor (CPM)

The CPM-720A Charge Plate Assembly is a miniature isolated plate attachment for the PFM-711A Field Meter. It converts the PFM-711A Field Meter into a portable, battery operated charged plate monitor (CPM). This unique design allows precision balancing of ionizing blowers and other devices to less than ± 2 volts accuracy.

When used with auxiliary leads or wrist strap, the CPM-720A measures body voltage and equipment charge generation. Combining this unique assembly with the Prostat PCS-730 Charging Source, one can easily confirm ionizer performance, plot decay times, measure suppression, and perform a variety of other electrostatic evaluations and demonstrations.

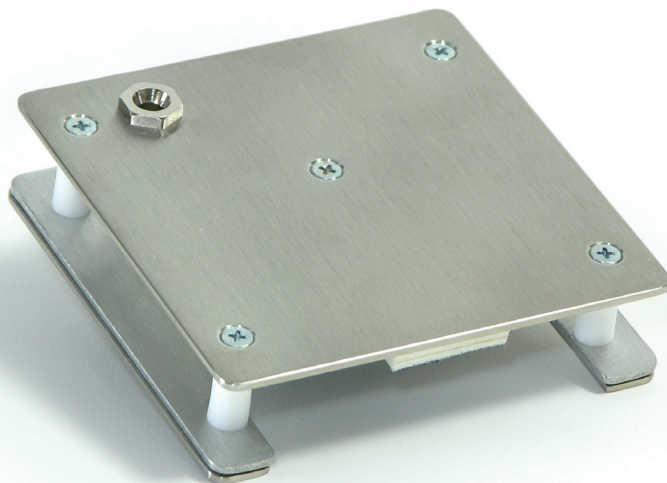



Data Sheet

Specifications for the CPM-720A Charge Plate Assembly

Tolerance	Matches the PFM-711A Field Meter within 2% when calibrated together
Capacitance	Plate Capacitance 10 picofarads (pF) ± 1 pF Note: Plate capacitance is 15.8 pF when mounted to PFM-711A Field Meter
Range	0 to ± 5.5 kV $\pm 2\%$ at 23 °C, 30% Rh.
Grounding	Through conductive case and snap fastener of PFM-711A Field Meter.
Dimension (LxWxH)	3.25" x 3.25" x 0.9" (8.25 cm x 8.25 cm x 2.3cm)
Weight	8 oz (227g)

1072 Tower Lane, Bensenville, IL 60106 USA
Phone +1 (630) 238-8883 Fax +1 (630) 238-9717

www.prostatcorp.com

©2017 Prostat Corporation. All rights reserved. Prostat, Prostat Corporation, Qube and the Prostat logo are trademarks or registered trademarks of Prostat Corporation or one of its affiliated companies in the United States and/or other countries. All other trademarks or registered trademarks are the property of their respective owners. Complying with all applicable copyright laws is the responsibility of the user. Prostat reserves the right to change, without notice, product offerings or specifications. Printed in U.S.A. REV4: 09/21/17