




Dial Test Indicator, Horiz., Ruby Sty.
Item number: 513-472-10E



Images

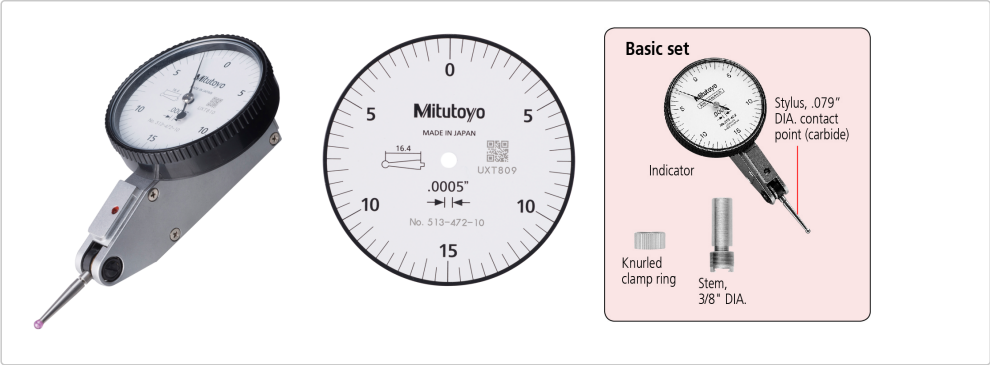


L1: 19.9 mm
L2: 16.4 mm
L3: 26,8 mm




L1: 19.9 mm
L2: 16.4 mm
L3: 26,8 mm



L1: 19.9 mm
L2: 16.4 mm
L3: 26,8 mm

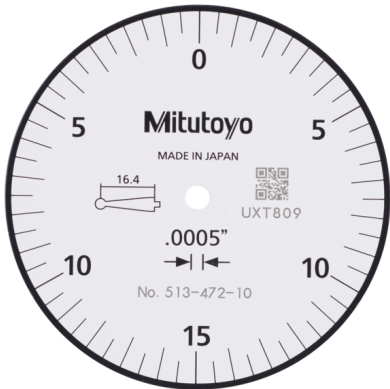

L1: 19.9 mm
L2: 16.4 mm
L3: 26,8 mm




L1: **19.9 mm**

L2: **16.4 mm**

L3: **26,8 mm**

Basic set



Indicator

Stylus, .079" DIA. contact point (carbide)

Knurled clamp ring

Stem, 3/8" DIA.

L1: **19.9 mm**

L2: **16.4 mm**

L3: **26,8 mm**


Description

- This is a Dial Test Indicator (Lever Type) which offers you the following benefits:
- Drastically enhanced durability, sensitivity and visibility.
 - Glare-free flat crystal face allows easy reading of graduations.
 - O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
 - The stylus length is on the dial face to reorder a replacement
 - Multi-layer coatings on the crystal.

Features

Digital/Analog:	Analog
Inch-Metric:	Inch
Functions:	Basic set - ruby contact point
Graduation:	0,0005"
Accuracy:	±0.0005"
H MPE (Hysteresis):	0,0002"
R MPE (Repeatability):	±0,0002"
Error of indication one revolution:	±0.0005"
Mass:	58 g
Contact point:	Thread M 1.7 x 0.35

Dimensions

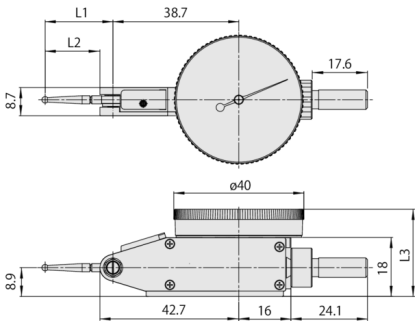

L1: **19.9 mm**

L2: **16.4 mm**

L3: **26,8 mm**

Spare parts

Consumable spares:

21CZA204

