



CATEGORY

On Sale Now

Torque 
Wrenches

Micro
Adjustable

Dial
Electronic
Preset

Interchangeable
Head

Heads For 
Wrenches

Preset
Limiters
Deflecting
Beam

Replacement 
Parts

Torque 
Multipliers

Torque 
Screwdrivers

Torque 
Testers

Torque 
Calibration
Systems

Sockets & 
Drive Tools

Other Hand 
Tools

/ 3/8" Dr 20-150 In Lbs/2.8-15.3 Nm CDI Adjustable Torque Wrench - 1502MRMH

3/8" Dr 20-150 In Lbs/2.8-15.3
Nm CDI Adjustable Torque
Wrench - 1502MRMH

★★★★★ 8 reviews



CDI

\$165.63

(You save \$188.27)

 **PayPal** Pay in 4 interest-free payments of \$

SKU: 1502MRMH

UPC: 662459927385

Condition: New

Availability: IN STOCK

Drive Size: 3/8 Inch

Max In Lbs: 150

Max Nm: 15.3

Length: 10.15"

Weight Lbs: 1

Quantity:  1 



ADD TO C

REQUEST
QUOTE

Chat 

BRAND

Williams

Bahco

Sioux

CDI

Tohnichi

Norbar

TorcUP

Seekonk

Gedore

Python

Proto

Ridgid

Digitool

Solutions

Pro Torque Tools

Hytorc

Precision

Instruments

View all Brands

Overview

Warranty


PRODUCT DESCRIPTION



The CDI 1502MRMH Micrometer Adj Torque Wrench Dual Scale has a 3/8" Drive and an English range of 20-150 In Lbs and Metric range of 2.8-15.3 Nm. The metal handle series offers the user a rugged, 3/8" drive micro adjusting torque wrench that is able to withstand the rigors of professional use. All of CDI's click torque wrenches are calibrated for use in both directions.

Features:

- Handles are lightly knurled for a tough, non-slip grip.
- Dual scale, calibrated dual direction
- Positive lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read laser marked scales
- Most feature quick release buttons which provide good socket retention as well as easy socket removal
- Accuracy: $\pm 4\%$ clockwise $\pm 6\%$ CCW of indicated value, CW, from 20% to 100% of full scale
- Meets or exceeds ASME B107.14-2004, ISO 6789 standards
- Individually serialized with matching certificate of calibration traceable to N.I.S.T.

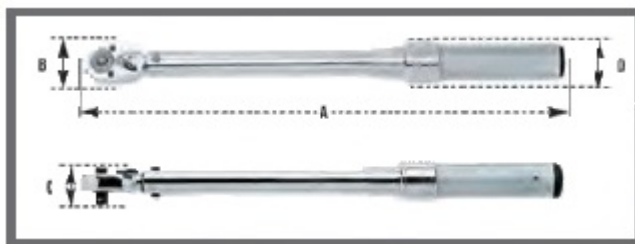

- Drive: 3/8"
- English Range: 20-150 in.lb
- English Range Increments: 1
- Nm Range: 2.8-15.3
- Nm Increments: 0.12
- A In.: 10.15
- B In.: 1.06