


Portable roughness tester




RUGOSURF 20

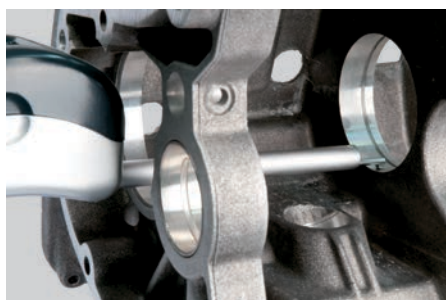

RUGOSURF 20 with 100 mm probe extension

KEY POINTS:

- **ROBUST – COMPACT – EASY TO USE**
- **400 µm MEASUREMENT IN Z DIRECTION**
- **ISO 3247 CLASS 1 PRECISION**
- **VISUAL REPRESENTATION OF RESULTS WITH BEARING AREA CURVE AND ROUGHNESS PROFILE**
- **MEMORY OF 20 COMPLETE MEASUREMENTS WITH GRAPHS**



Results display

RUGOSURF 20 THE ROUGHNESS TESTER FOR EVERY WORKSHOP

Robust and easy to use

The powerful and reliable probe drive mechanism is housed in an aluminium alloy base. Operating keys are protected against liquid and dust ingress. The diamond tip provides excellent wear resistance. The RUGOSURF 20 is easy to use and popular thanks to

its ergonomic design and intuitive interface. A wide range of applications are facilitated by the standalone vertical adjustment holders (of up to 35 mm) and by the positioning pin that means it is compatible with any standard 8-mm-diameter measurement stand.



RUGOSURF 20 and suction-mounted articulated arm*

FEATURES

Main features	
Cut-off length	Choice of 3
Number of cut-offs	1 to 5
Parameters	Customised activation of roughness parameters
Tolerances	Tolerances can be selected for all parameters
Results display	Parameters, graphs and bearing area curve (Abbott) are displayed on the device
Memory	Previous measurements are recorded
Return of probe to measurement position	Automatic after each measurement
Standards and units of measurement	Choice of ISO 3287 or ISO 12085 (CNOMO) and of mm or inches
Calibration	Standard roughness calibration specimen (included)
Measurement delay	None or choice of 6 time-delays
Stand-by mode	Automatic for optimum battery life
Clock	Time and date settings

ACCESSORIES

RUGOSOFT software


- Archiving of data and measurement parameters for quality control or for database
- Software control of the RUGOSURF 20: parameters, tolerances, settings and measurements
- Traceability of results, tolerances, statistics, roughness profiles and Abbott curve in inspection reports
- Data export
- Supplied with a software licence dongle (USB stick).



RUGOSOFT software

Matrix printer

- Portable printer with internal battery
- Immediate printing of measurement results with roughness profile
- Printing of measurements from the RUGOSURF 20's memory
- Supplied with:
 - Charger with EU/US adapter
 - Roughness tester connecting cable
 - 1 roll of paper and battery (pre-installed)
 - Carrying case

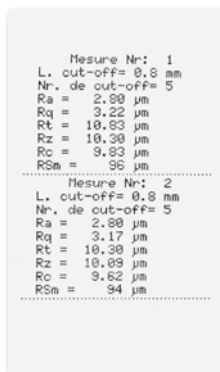

Examples of printing



Matrix printer

PROBES AND OTHER ACCESSORIES

Probe (stylus tip R = 5 µm, 90° unless stated otherwise)

06960036	SB10 probe – For surfaces, bores and shafts with diameter >10 mm
06960037	SB20 probe – For grooves with a depth <5 mm
06960038	SB30 probe – For small bores of diameter >4 mm
06960039	SB40 probe – V-shaped for cylinders of diameter >1 mm
06960040	SB50 probe – For concave surfaces
06960057	SB110 probe – For concave or convex surfaces with radius >5 mm
06960056	100 mm probe extension
06960081	SB10 probe with stylus tip R = 2 µm, 90°

Roughness calibration specimen


06960041	Roughness specimen Ra = 2,97 µm (117 µin)
06960064	Roughness specimen Ra = 0,1 µm (4 µin)
06960065	Roughness specimen Ra = 0,5 µm (20 µin)
06960066	Roughness specimen Ra = 1 µm (40 µin)

Software and printer

06960034	RUGOSOFT Software
04760099	USB cable for RUGOSURF 20 to PC connection
06960033	Matrix printer
06960043	Ink ribbons for printer (set of 3 ribbons)
06960044	Roll of paper, 57 mm wide (10-pack)

Other

06960035	Granite base, 400 x 250 mm with measurement stand
01639024	Suction-mounted articulated-arm

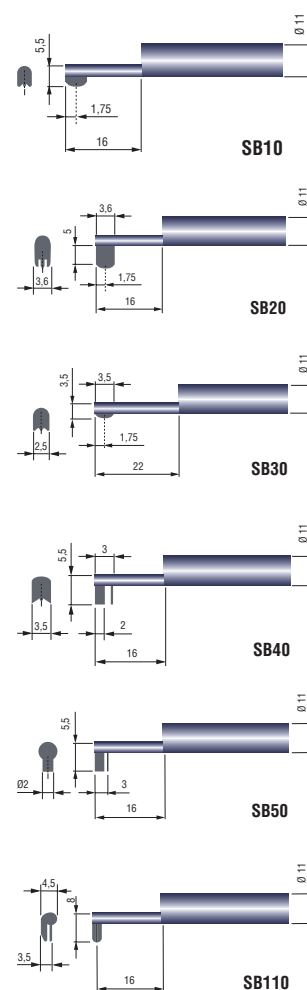

100 mm probe extension



Roughness specimen Ra = 2.97 µm (117 µin)

Granite base with measurement stand



Suction-mounted articulated arm

CONTENTS OF DELIVERY OF THE RUGOSURF 20

TESA RUGOSURF 20 roughness tester (No. 06930013) supplied with:

06960036	SB10 probe (with stylus tip R = 5 µm, 90°)
06960041	Roughness specimen Ra = 2,97 µm (117 µin)
056633	Positioning pin (8-mm diameter)
057655	Vertical V-shaped support for diameter > 80 mm
057653	Removable probe protector
06960045	Rechargeable battery (7.2V, 300 mAh)
06960046	Mains charger (240/110V, 50/60 Hz) with EU/US adapter
056632	Knurled screw (set of 4) for vertical support
-	User manual
-	Carrying case



TECHNICAL SPECIFICATIONS

Part number: 06930013

Roughness parameters:

ISO 4287-1997/JIS B0601/ASME B46-2002:

Ra - Rq - Rt - Rz - Rc - Rsm - Rmr - Pt - Pmr

DIN 4768: Rmax - EN 10049: R_{Pc} - P_{Pc}

ISO 12085 (CNOMO): R - Rx - AR

Graphs: bearing area curve, roughness profile

Measurement range: X-axis = 16 mm, Z-axis = 400 µm

Display range: Ra 0 ÷ 100 µm, (0 ÷ 3937 µin)

Rt 0.05 ÷ 400 µm (1.97 ÷ 15748 µin)

Resolution: 0,001 µm

Precision: ISO 3274, Class 1

Units of measurement: mm / inches

Display: 2" black and white LCD (160 x 100 pixels)

Delay before measurement: 0 - 1 - 2 - 4 - 6 - 8 - 10 s

Cut-off length:

0,25 - 0,8 - 2,5 mm (0.010 - 0.030 - 0.100 in)

Number of cut-offs: 1 to 5

Electronic filters:

Gaussian filter as per ISO 11562 and

λs filter as per ISO 3274

Probe type: inductive probe with skid

Diamond stylus tip:

R = 5 µm, 90° (06960036 SB10 standard probe)

Measurement force: 0,75 mN (ISO 3274)

Speed of travel: 0,5 - 1 mm/s (measurement and positioning)

Languages:

English, Spanish, Portuguese, German, French, Italian, Dutch, Slovakian, Chinese, Japanese

Internal memory:

20 measurements with profile and graphs or

> 1000 measurements with parameters only

Power supply: Internal battery (7.2V, 300 mAh, NiMH PP3)

Battery autonomy: Approximately 1000 measurements

Full recharge: 8 hours

Ports: Micro USB (PC) and Special (printer)

Operating temperature: 10°C to 40°C

Storage temperature: -10°C to 50°C

Dimensions and weight: 122 x 60 x 62 mm, 650 g



Carrying case

WWW.TESABS.CH

TESA SA Switzerland
Bugnon 38
CH-1020 Renens
Vente Suisse
Tél. +41 (0)21 633 16 00
Fax +41 (0)21 633 17 57
tesa-ventech@hexagonmetrology.com

TESA FRANCE SAS
2, rue Antoine Lavoisier
Pôle Lavoisier - bâtiment A
F-54300 MONCEL-lès-LUNEVILLE
Tél. +33 (0)3 83 76 83 76
Fax +33 (0)3 83 74 13 16
tesa-france@hexagonmetrology.com

TESA Technology Deutschland GmbH
Netzstraße 32
D-71638 Ludwigsburg
Tél. +49 (0)7141 8747 0
Fax +49 (0)7141 8747 88
tesa-de@hexagonmetrology.com

TESA Technology UK Ltd.
Metrology House
Halesfield 13
GB-Telford, Shrops. TF7 4PL
Tél. +44 1952 681 349
Fax +44 1952 681 391
tesa-uk@hexagonmetrology.com

TESA Technology ITALIA s.r.l.
Via Bizzozzero, 118
IT-20032 Cormano (MI)
Tél. +39 02 663 053 69
Fax +39 02 663 090 82
tesa-italia@hexagonmetrology.com

TESA Technology Ibérica
Av. de Vizcaya s/n
Apart. 202
ES-48260 Ermua
Tél. +34 943 170 340
Fax +34 943 172 092
tesa-iberica@hexagonmetrology.com

TESA Benelux
Van Elderenlaan 1
NL-5581 WJ Waalre
Tél. +31 (0)40 222 06 08
Fax +31 (0)40 222 17 16
tesa-benelux@hexagonmetrology.com

TESA SA - Bugnon 38 - CH-1020 Renens - Switzerland - Tel. +41(0)21 633 16 00 - Fax +41(0)21 635 75 35 - www.tesabs.ch - tesa-info@hexagonmetrology.com