


Keysight Technologies

CX3300 Current Waveform Analyzer

Quick Operation Guide

How to set the Trigger

1. Press [Sweep] to set the Trigger to ON.
2. Select the Trigger Type. (Default: “Edge”)
 - 2-1. Select “Trigger” on the Tool Palette
 - 2-2. Select the Trigger Type (“Edge” in this case) from the Trigger Tool Palette
 - 2-3. Drag-and-drop the icon onto the target waveform. The color of the icon shows the target waveform.

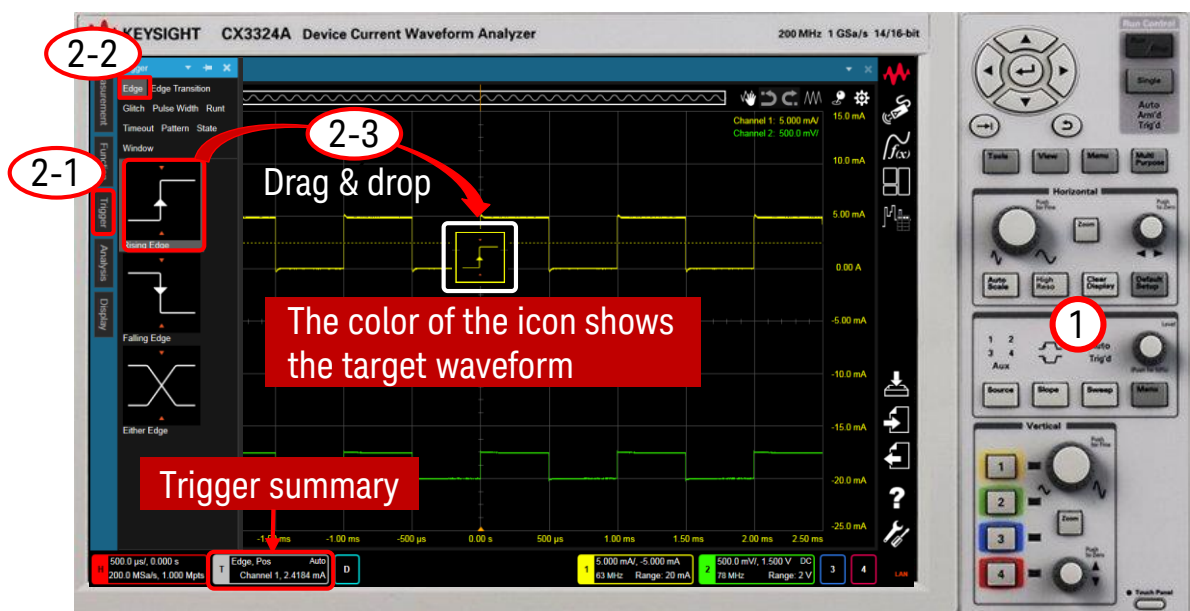

Next page

3. Change the trigger source, slope and level using either:
 - a) The Trigger Controls
 - OR
 - b) The Trigger Mini dialog box.
4. For more detailed conditions, open the “Setting > Trigger dialog box” by either:
 - a) Pressing the [Menu] button
 - OR
 - b) Clicking the “□” at the upper right of the Trigger mini dialog box.

