







WERLATONE

SINCE 1965

Werlatone, Inc.
2095 Route 22
PO Box 47
Brewster, NY 10509
845.279.6187
FAX.279.7404
www.werlatone.com

40 dB Dual Directional Coupler

Model C2630

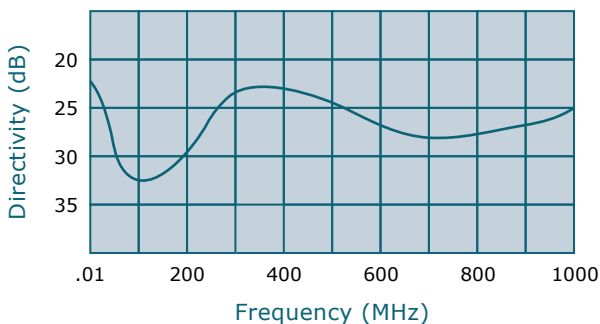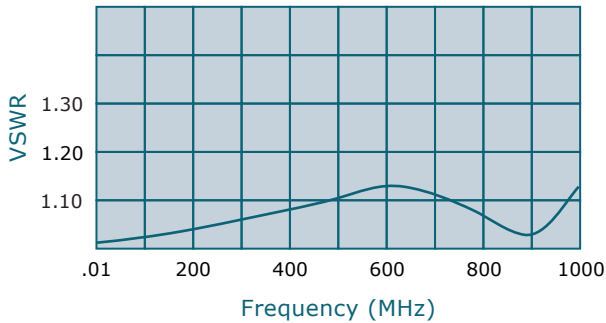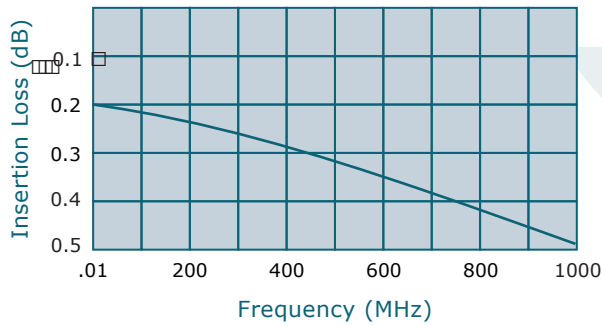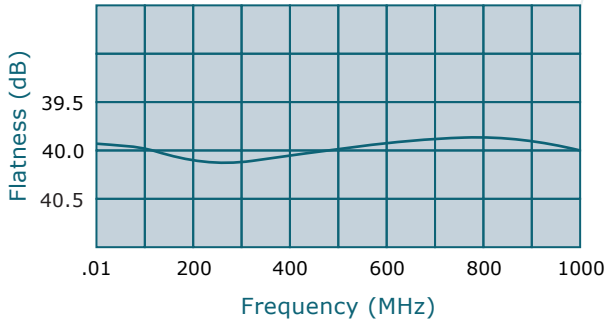

Frequency: 0.01-1000 MHz

Power: 100 W CW

Insertion Loss: 0.6 dB Max.

VSWR: 1.30:1 Max.

Flatness: +/- 0.5 dB Max.


Directivity: 20 dB Min.

*Mismatch Tolerant Design

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- * Designed to operate, at 100 W CW, into an infinite VSWR. (Registered Trademark)

Connectors

Model	Mainline	Coupled Ports
C2630-10	N Female	N Female
C2630-12	N Female	SMA
C2630-13	N Female	BNC
C2630-102	SMA	SMA

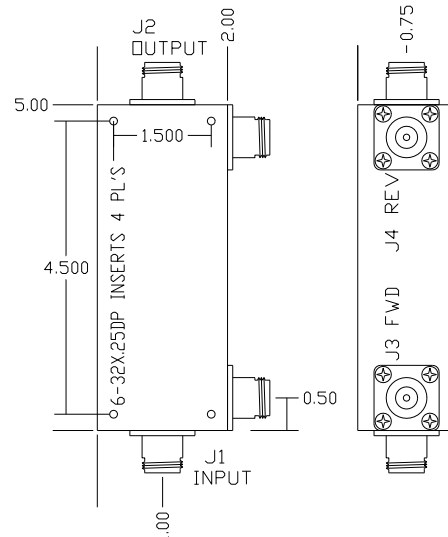

high power RF devices