


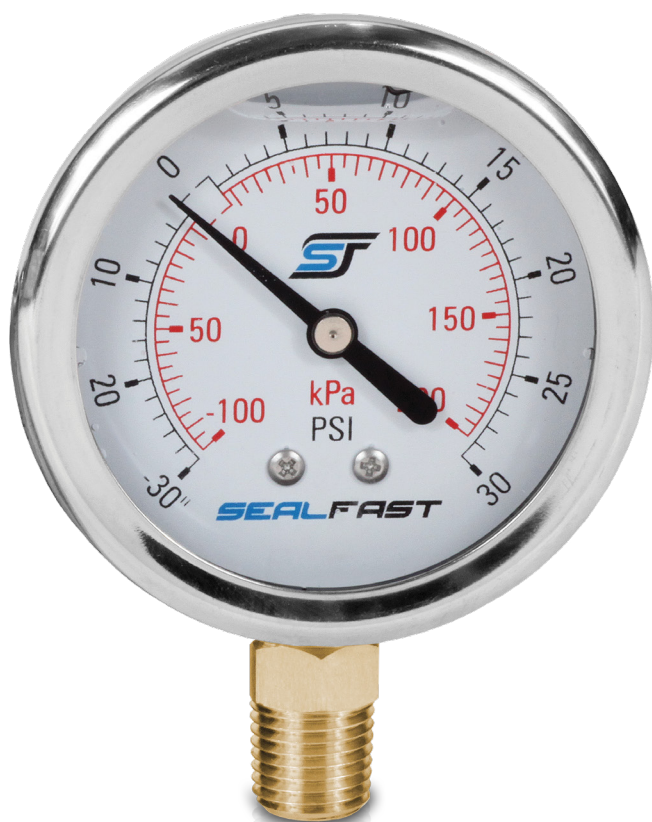

GAUGES - LIQUID

4" X 1/4" MOUNT -
STEEL CASE / BRASS INTERNALS

FEATURES & APPLICATIONS:

- Used in hydraulic and pneumatic systems, compressors, regulator machine, and suitable for fluid medium or gaseous which does not clog connection port or corrode stainless steel. Can use for severe service conditions where pulsation or vibration exist. Premium quality and long life.

Case Venting: Liquid filled gauges should be vented to atmosphere to relief internal case pressure prior to use. You can easily do this by turning the valve lever on the back of the gauge to the open position. Liquid-Fill gauges are typically shipped with the valve in the closed position.



LM
Lower mount



UC
U-Clamp

TECHNICAL DATA:

- **CASE:** Stainless Steel
- **WINDOW:** Glass
- **INTERNAL:** Copper Alloy
- **CONNECTION:** Brass
- **ACCURACY:** $\pm 3/2/3\%$ of span
- **TEMPERATURE RANGE:** -4°F to 140°F

STEEL CASE / BRASS INTERNALS

Face Size	Mount	PSI	Part #	Part #
4"	1/4" NPT		LM	UC
		15 psi / 103 kpa	G40151PS	G40152PSU
		30 psi / 200 kpa	G40301PS	G40302PSU
		60 psi / 400 kpa	G40601PS	G40602PSU
		100 psi / 700 kpa	G401001PS	G401002PSU
		160 psi / 1,100 kpa	G401601PS	G401602PSU
		200psi / 1,400 kpa	G402001PS	G402002PSU
		300 psi / 2,100 kpa	G403001PS	G403002PSU
		400 psi / 2,800 kpa	G404001PS	G404002PSU
		600 psi / 4,000 kpa	G406001PS	G406002PSU
		1,000 psi / 7,000 kpa	G4010001PS	G4010002PSU
		1,500 psi / 10,000 kpa	G4015001PS	G4015002PSU
		2,000 psi / 14,000 kpa	G4020001PS	G4020002PSU
		3,000 psi / 21,000 kpa	G4030001PS	G4030002PSU
		5,000 psi / 35,000 kpa	G4050001PS	G4050002PSU
		10,000 psi / 70,000 kpa	G40100001PS	G40100002PSU
		15,000 psi / 103421 kpa	G40150001PS	G40150002PSU



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.