


Torque Wrenches

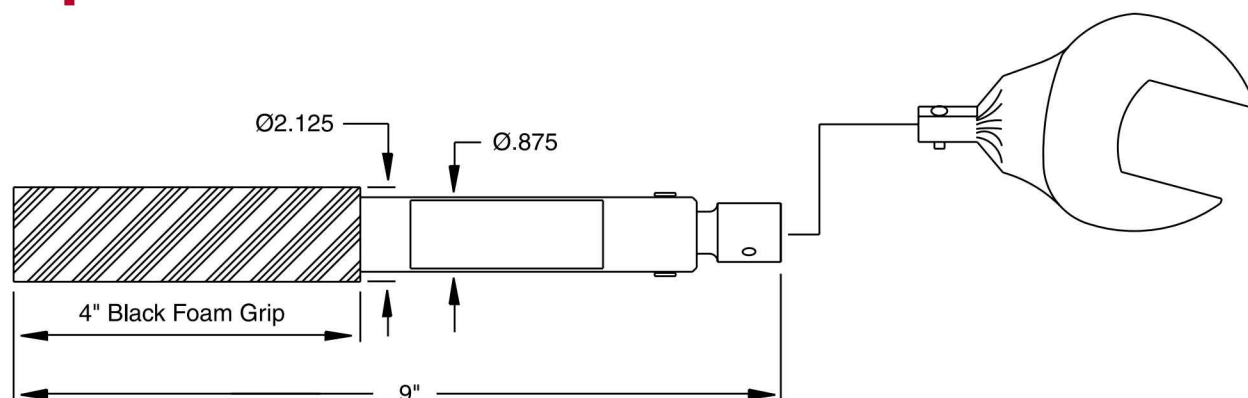


Tolerances +2/-0 ft-lbs

Part Number	Factory Set Torque	For Use With	CGA 320 & 330 Hex Flat	CGA 660 & 670 Hex Flat	CGA 326, 346, & 350 Hex Flat
77-350-TW	40 ft-lbs	Nickel Seal Enhancers	—	—	1-1/8
77-CGA-32-TW	20 ft-lbs	PTFE or PCTFE Washers	1-1/8	—	—
77-CGA-60-TW	30 ft-lbs	PTFE or PCTFE Washers	—	1-1/4	—

Torque wrenches are specifically designed for use with the Compressed Gas Association's CGA 320, 326, 330, 346, 350, 660 and 670 series of connections. Torque is factory set to the CGA recommendations. Calibration service is also available and is recommended every six months or 4,000 cycles, whichever comes first.

Pigtail Handles

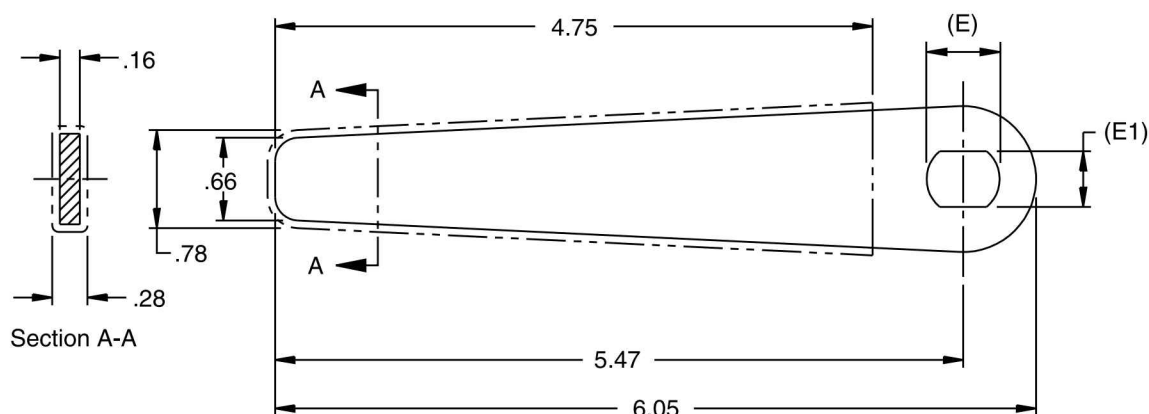

Part Number	E Diminsion	E1 Flat Size
77-PH7	9/16	7/16
77-PH9	11/16	9/16
77-PH10	3/4	5/8
77-PHJIS	11/16	7/16