




DTT Series Digital Torque Testers

New Generation Premium Torque Testers

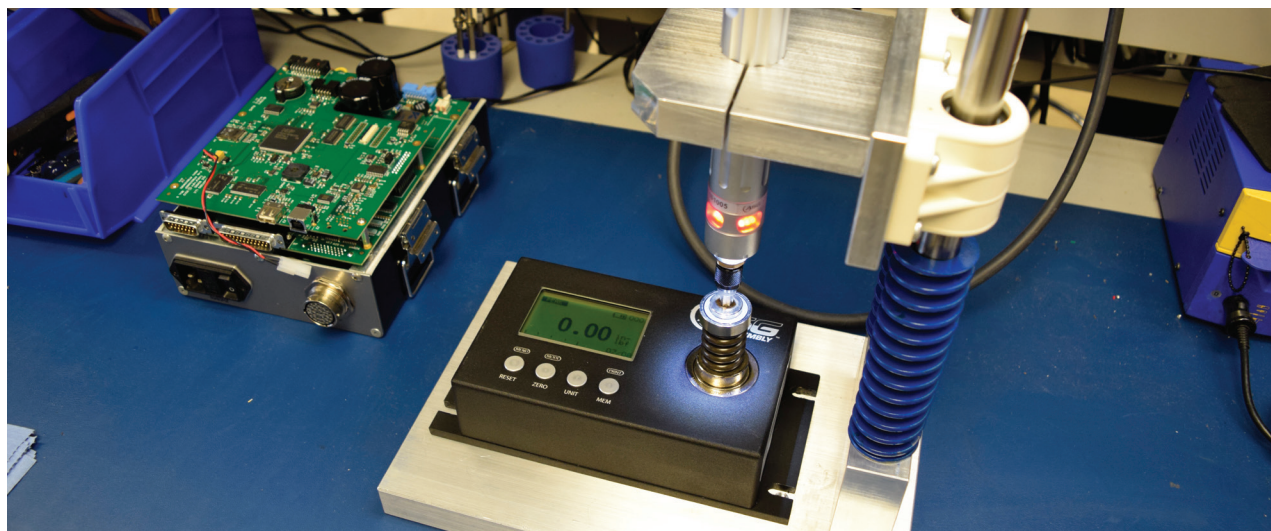

- $\pm 0.5\%$ of full scale accuracy
- Dimensions*: 7.1in x 4.4 in x 2.0in (180mm x 111mm x 50mm)
- Weight*: 5 lbs (2.3 kg)
- 6-7 torque units selectable depending on model
- Reads clockwise or counterclockwise
- **NEW** Communications: Mini USB to USB and RS-232
- 3 modes of Operation: Track, Peak and First Peak
- **NEW** 500 readings stored in memory
- Data collection software included
- 3/8" female square drive
- **Multiple Functions:** Auto Reset, Auto Memory, Auto Zero, Real Time Clock, Pass/Fail Statistics, Torque Bar, Battery Indicator, Charging Status Indicator, and Transducer State
- Calibration certificate traceable to N.I.S.T.
- Not for use with impact or pulse tools
- Complete selection of rundown adapters available

Model Number	ASG Number	Torque Range	
		lbf.in	N.m
DTT-5	66700	0.5 - 5.0	0.06 - 0.56
DTT-10	66701	1.0 - 10.0	0.11 - 1.13
DTT-30	66702	3.0 - 30.0	0.33 - 3.4
DTT-50	66703	5.0 - 50.0	0.56 - 5.6
DTT-100	66704	10.0 - 100.0	1.13 - 11.3
DTT-200	66705	20.0 - 200.0	2.3 - 22.6
DTT-500	66706	50.0 - 500.0	5.6 - 56.5

* Dimensions of DTT-200 and DTT-500 with mounting plate: 8.625in x 4.375in x 2.19in (219mm x 111mm x 56mm); Weight: 6.8lb (3.1 kg)

Standard Equipment

All DTT meter kits are supplied with the following standard items:

- DTT torque meter
- Rundown adapter(s) (see chart below)
- Carrying case with insert
- Mini USB to USB cable (ASG #66629)
- Battery charger (110-120V U.S. Style - ASG #66608)
- International Charger (220-240 VAC) (ASG #915966) - supplied with -INTL models

Included with DTT-5 (66700)					
ASG Number	Type	Drive Size	Torque Range		Spring Color
			lbf.in	N.m	
66620	Adapter w/ Spring	4mm HIOS	0.25 - 2.0	0.03 - 0.23	Black
CP66612	Adapter	1/4" Hex	N/A	N/A	N/A
CP66614	Spring	N/A	1.3 - 5.0	0.15 - 0.56	Yellow

Included with DTT-10 (66701) and DTT-30 (66702)					
ASG Number	Type	Drive Size	Torque Range		Spring Color
			lbf.in	N.m	
66620	Adapter w/ Spring	4mm HIOS	0.25 - 2.0	0.03 - 0.23	Black
CP66612	Adapter	1/4" Hex	N/A	N/A	N/A
CP66614	Spring	N/A	1.3 - 5.0	0.15 - 0.56	Yellow
CP66616	Spring	N/A	4.5 - 26.0	0.51 - 2.9	Black

Included with DTT-50 (66703) and DTT-100 (66704)					
ASG Number	Type	Drive Size	Torque Range		Spring Color
			lbf.in	N.m	
66633	Adapter w/ Spring	4mm HIOS	4.5 - 26.0	0.51 - 2.9	Black
66617	Adapter w/ Spring	1/4" Hex	4.5 - 26.0	0.51 - 2.9	Black
66618	Adapter w/ Spring	1/4" Hex	25.0 - 80.0	2.8 - 9.03	Black

Included with DTT-200 (66705)					
ASG Number	Type	Drive Size	Torque Range		Spring Color
			lbf.in	N.m	
66618	Adapter w/ Spring	1/4" Hex	25.0 - 80.0	2.8 - 9.03	Black
66634	Adapter w/ Spring	3/8" Hex	50.0 - 200.0	5.6 - 22.6	Black

Included with DTT-500 (66706)					
ASG Number	Type	Drive Size	Torque Range		Spring Color
			lbf.in	N.m	
66618	Adapter w/ Spring	1/4" Hex	25.0 - 80.0	2.8 - 9.03	Black
66642	Adapter w/ Spring	3/8" Hex	50.0 - 500.0	5.6 - 56.5	Black



ASG #66608



ASG #915966

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Quality Certified ISO 9001:2008
ASG, Division of Jergens, Inc.
Jergens Way, 15700 S. Waterloo Road
Cleveland, OH 44110-3898
Toll Free: (888) 486-6163 | Fax: (216) 481-4519
Email: asginfo@asg-jergens.com | www.asg-jergens.com