






Dial Test Indicator, Horiz., Ruby Sty.  
Item number: 513-472-10E



Images

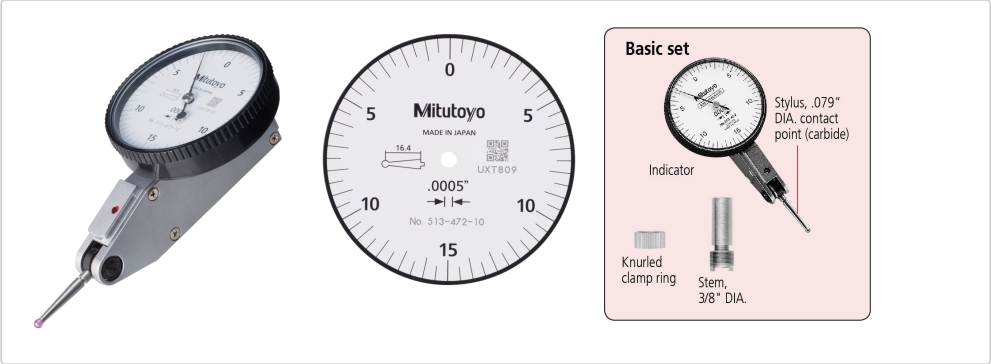

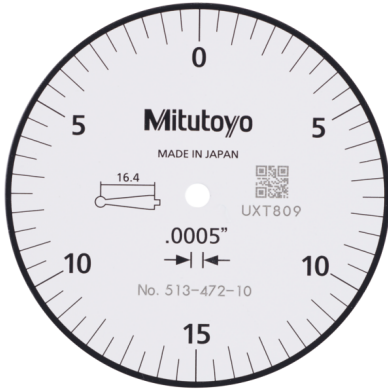

#### Basic set



Stylus, .079"  
DIA. contact  
point (carbide)

Indicator



Knurled  
clamp ring



Stem,  
3/8" DIA.

## Description

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:

- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.

## Features

Digital/Analog:

**Analog**

Inch-Metric:

**Inch**

Scale:

**0-15-0**

Accuracy:

**±0.0005"**

|                                     |                                                                                                 |
|-------------------------------------|-------------------------------------------------------------------------------------------------|
| Error of indication one revolution: | <b>±0.0005"</b>                                                                                 |
| H MPE (Hysteresis):                 | <b>0,0002"</b>                                                                                  |
| R MPE (Repeatability):              | <b>±0,0002"</b>                                                                                 |
| Contact point:                      | <b>Thread M 1.7 x 0.35</b>                                                                      |
| Delivered:                          | <b>In a box with stem <math>\varnothing 3/8"</math>, stylus <math>\varnothing 0.079"</math></b> |
| Mass:                               | <b>58</b>                                                                                       |
| L1:                                 | <b>19.9</b>                                                                                     |
| L2:                                 | <b>16.4</b>                                                                                     |
| [mm]:                               |                                                                                                 |
| Functions:                          | <b>Basic set - ruby contact point</b>                                                           |

## Dimensions

