

Please read through this owners manual carefully before using your new tool. Use your tool properly and only for its intended use.

Fowler

INDI-Xtreme[®] with FRACTIONS

ELECTRONIC INDICATOR

I. Features

1. ON/OFF
2. Floating ZERO
3. Absolute/Incremental readings
4. Direct mm/in/fraction conversion
5. Tolerance indicators
6. Battery cover
7. Lug back and 3/8 stem diameter
8. Top lifting knob
9. 4-48 carbide contact point (reversible with top lifting knob)



II. Operation

1. To turn the indicator on or off press ON/OFF (1) momentarily.
2. To ZERO the indicator at any location press ZERO (2). This can be used in either ABS or INC.
3. Press mm/in/F (4) to display readings in either inch, metric or fraction.
4. Press ABS/INC (3) to toggle between Absolute and Incremental reading. ZERO may be set at any location in either mode.
5. Tolerance indicators may be activated by pressing TOL (5) one time. "▲" will appear in the display. Displace the spindle so the maximum allowed reading is displayed and press TOL once more. "▼" will appear in the display. Displace the spindle so the minimum allowed reading is displayed and press TOL once more.

"OK" will be shown in the display while your readings are between the two allowed readings. Once either of these settings has been exceeded "OK" will flash indicating an out of tolerance measurement. To exit TOL mode depress ZERO (2). To reset tolerances depress TOL (5) and input the max and min readings.

Specifications	
Measuring Range:	0-1"/0-25mm 0-.5"/0-12.5mm
Resolution:	0.0005"/0.01mm/ 1/128th
Accuracy:	0.001"/0.03mm
Repeatability:	0.0005"/0.01mm
Display:	LCD (11.0 mm high) 1.5m per second
Maximum Measuring Speed:	3V, type CR2032 Lithium
Battery:	Approx. 1 year
Battery life:	

III. Maintenance

- Avoid contact with liquids and excessive humidity.
- If the instrument requires cleaning, use only isopropyl alcohol and a soft cloth.
- Battery is low when the display flashes. To replace the battery, use a small screwdriver to open the side battery compartment (6). Uses 1 CR2032 battery.

Please read through this owners manual carefully before using your new tool. Use your tool properly and only for its intended use.


Fowler

INDI-Xtreme[®] with FRACTIONS

ELECTRONIC INDICATOR

I. Features

1. ON/OFF
2. Floating ZERO
3. Absolute/Incremental readings
4. Direct mm/in/fraction conversion
5. Tolerance indicators
6. Battery cover
7. Lug back and 3/8 stem diameter
8. Top lifting knob
9. 4-48 carbide contact point (reversible with top lifting knob)

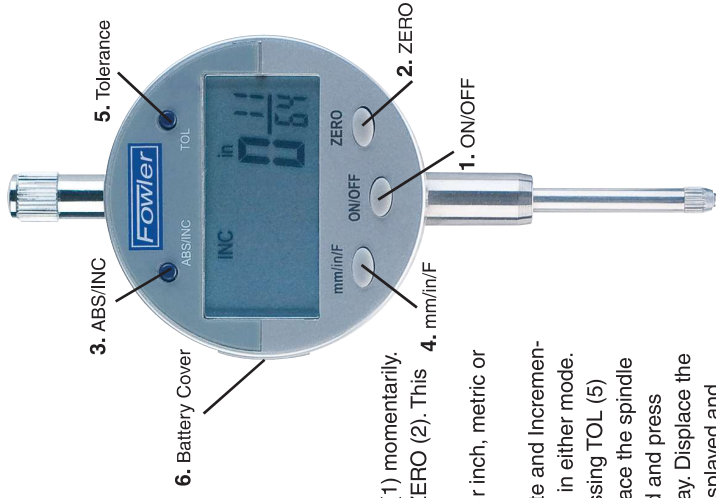

II. Operation

1. To turn the indicator on or off press ON/OFF (1) momentarily.
2. To ZERO the indicator at any location press ZERO (2). This can be used in either ABS or INC.
3. Press mm/in/F (4) to display readings in either inch, metric or fraction.
4. Press ABS/INC (3) to toggle between Absolute and Incremental reading. ZERO may be set at any location in either mode.
5. Tolerance indicators may be activated by pressing TOL (5) one time. "▲" will appear in the display. Displace the spindle so the maximum allowed reading is displayed and press TOL once more. "▼" will appear in the display. Displace the spindle so the minimum allowed reading is displayed and press TOL once more.

"OK" will be shown in the display while your readings are between the two allowed readings. Once either of these settings has been exceeded "OK" will flash indicating an out of tolerance measurement. To exit TOL mode depress ZERO (2). To reset tolerances depress TOL (5) and input the max and min readings.

Specifications	
Measuring Range:	0-1"/0-25mm 0-.5"/0-12.5mm
Resolution:	0.0005"/0.01mm/ 1/128th
Accuracy:	0.001"/0.03mm
Repeatability:	0.0005"/0.01mm
Display:	LCD (11.0 mm high) 1.5m per second
Maximum Measuring Speed:	3V, type CR2032 Lithium
Battery:	Approx. 1 year
Battery life:	

III. Maintenance

- Avoid contact with liquids and excessive humidity.
- If the instrument requires cleaning, use only isopropyl alcohol and a soft cloth.
- Battery is low when the display flashes. To replace the battery, use a small screwdriver to open the side battery compartment (6). Uses 1 CR2032 battery.